



**Art.-Nr: QBW009**

**General light, Emergency light Centralised power supply systems**

**Universal, Without monitoring, CPS, , IP44, Polycarbonate, White**

Round plastic LED general-purpose luminaire, as combined safety luminaire in a timeless design.

Alongside the general-purpose lighting, it also includes an integrated safety light function. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example.



More information  
[www.rp-group.com/en/item/QBW009](http://www.rp-group.com/en/item/QBW009)



**TECHNICAL DATA**

|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | General light, Emergency light   |
| Mounting               | Universal                        |
| Pictograph             | No                               |
| Illuminant             | LED                              |
| Housing material       | Polycarbonate                    |
| Housing color          | White                            |
| Protection type (IP)   | IP44                             |
| Impact resistance (IK) | 6                                |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Without monitoring               |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | Permanent circuit                |
| Input voltage AC       | 230 V                            |
| Input frequency        | 50 Hz                            |
| Input voltage DC       | 216 V                            |
| Power max.             | 17 W                             |



|   |                     |
|---|---------------------|
| Power maintained                        | 17 W                |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Height                                  | 98 mm               |
| Diameter                                | 339 mm              |
| Weight                                  | 1.49                |
| Weight incl. packaging                  | 1.71                |
| Connection cross-section                | 1.5 mm <sup>2</sup> |
| Switching input                         | No                  |
| Emergency light blocking                | No                  |
| Battery connection                      | No                  |
| Dimming function                        | No                  |
| Luminous flux mains                     | 1800 lm             |
| Luminous flux emergency                 | 1800 lm             |
| Customs tariff number                   | 94056180            |
| EAN                                     | 4260682141552       |




TECHNICAL DRAWING

QBW



QBW

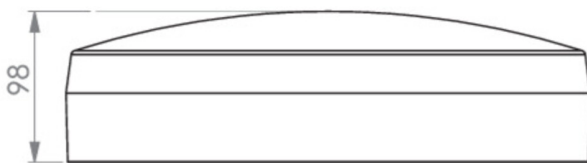

As of: 29.04.2025 - Subject to technical changes and errors.