



Art.-Nr: QBW009ML-BM
General light, Emergency light Centralised power supply systems
Universal, Central power supply (ML), CPS, , IP44, Polycarbonate, White

Round plastic luminaire for general-purpose lighting with integrated motion detector. To illuminate escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

In a timeless design, suited to indoor use. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example. By means of the motion detector, which cannot be seen from the outside, the general-purpose light is switched independently of the emergency light.

Control and monitoring via central power supply system. Our motion detector (BM) reliably detects movements and automatically turns on the light in mains operation.



More information
www.rp-group.com/en/item/QBW009ML-BM



TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP44
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit



Input voltageAC	230 V
Input frequency	50 Hz
Input voltage DC	216 V
Power max.	19,5 W
Power maintained	17,5 W
Power non-maintained	2 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	98 mm
Diameter	339 mm
Weight	1.49
Weight incl. packaging	1.71
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	1800 lm
Luminous flux emergency	1800 lm
Customs tariff number	94056180
EAN	4260682146243




TECHNICAL DRAWING

QBW




QBW

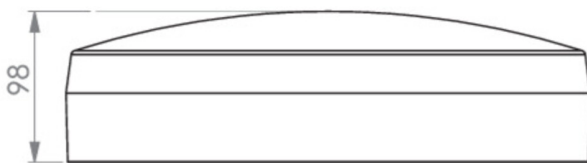



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
QBW009ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central

As of: 29.04.2025 - Subject to technical changes and errors.