



Art.-Nr: QBW2110

General light, Emergency light Centralised power supply systems

Universal, Without monitoring, CPS, , IP44, Polycarbonate, White

Round polycarbonate luminaire for general lighting and illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

Robust and timeless design, suitable for indoor use. The emergency light LED can be unfolded tool-free during assembly e.g. for optimally illumination of the escape and rescue routes especially for wall mounting.

Speciality: The emergency-LED is supplied by 110V.



More information

www.rp-group.com/en/item/QBW2110



TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP44
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	110 V





Power max.	17 W
Power maintained	17 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	98 mm
Diameter	339 mm
Weight	1.44
Weight incl. packaging	1.66
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	470 lm
Luminous flux emergency	470 lm
Customs tariff number	94056080
EAN	4260682154545





TECHNICAL DRAWING

QBW

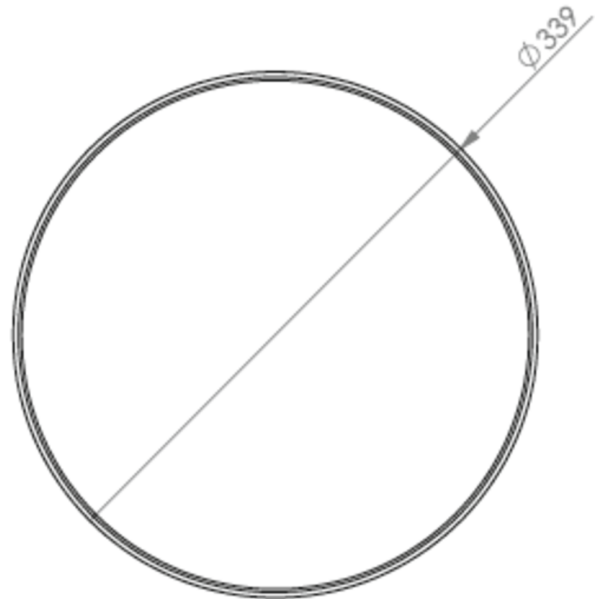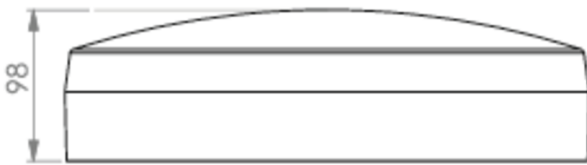

QBW

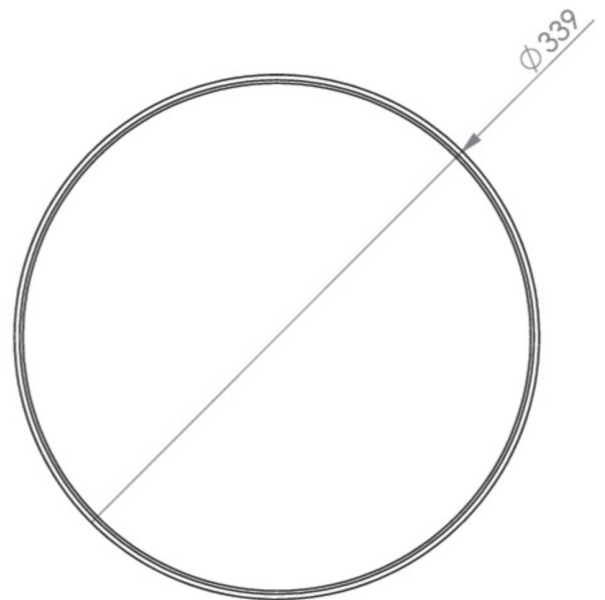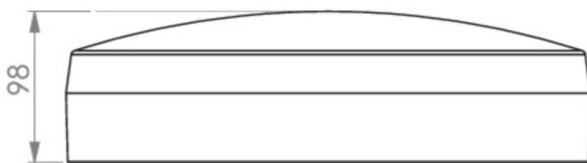

As of: 02.06.2025 - Subject to technical changes and errors.