



**Art.-Nr: QCW009-AZ-BM**

**General light, Emergency light Centralised power supply systems**

**Universal, Without monitoring, CPS, , IP54, Zinc die-cast, Anthracite**

Round die-cast aluminum luminaire for general lighting with integrated motion detector. As well as illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

Robust and timeless design, suitable for indoor and outdoor use. The general light is switched independently of the emergency light via the motion detector, which is not visible from the outside.

Our motion detector (**BM**) reliably detects movements and automatically turns on the light in mains operation.



More information

[www.rp-group.com/en/item/QCW009-AZ-BM](http://www.rp-group.com/en/item/QCW009-AZ-BM)



## TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V



Input frequency	50 Hz
Input voltage DC	216 V
Power max.	17,5 W
Power maintained	17,5 W
Power non-maintained	0,5 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	106 mm
Diameter	363 mm
Weight	2.59
Weight incl. packaging	2.92
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	1600 lm
Luminous flux emergency	1600 lm
Customs tariff number	94056180
EAN	4260682146304




TECHNICAL DRAWING

QCW



QCW

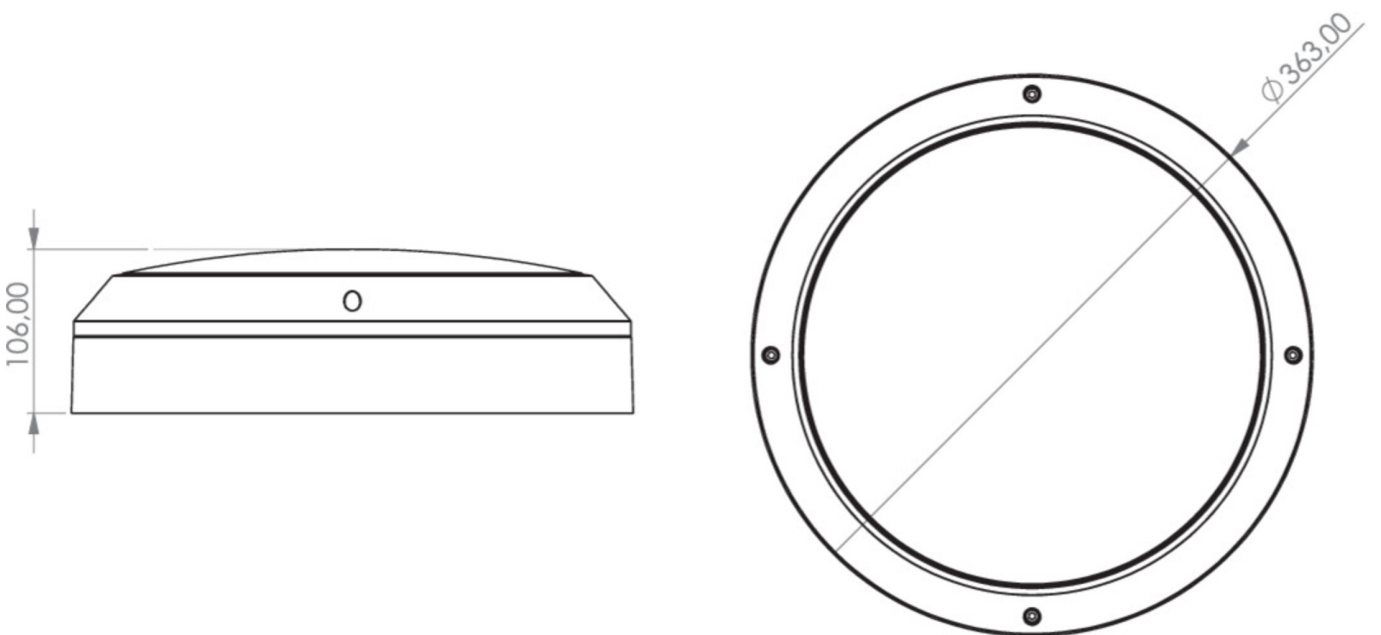

As of: 29.04.2025 - Subject to technical changes and errors.