



Art.-Nr: QCW423SC-AZ-BM-TT General light, Emergency light Universal, SelfControl (SC), , , IP54, Zinc die-cast, Anthracite

Round zinc die-cast luminaire for general-purpose lighting with integrated motion detector. To illuminate escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

A robust variant in a timeless design, suited to indoor and outdoor use. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example. By means of the motion detector, which cannot be seen from the outside, the general-purpose light is switched independently of the emergency light.

Automatic monitoring of safety luminaire with SelfControl. Our motion detector (BM) reliably detects movements and automatically turns on the light in mains operation.









TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Monitoring	SelfControl (SC)
Battery	1
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Height	106 mm
Diameter	363 mm
Weight	2.5






Weight incl. packaging	2.83
Customs tariff number	94056180
EAN	4262483025543





TECHNICAL DRAWING



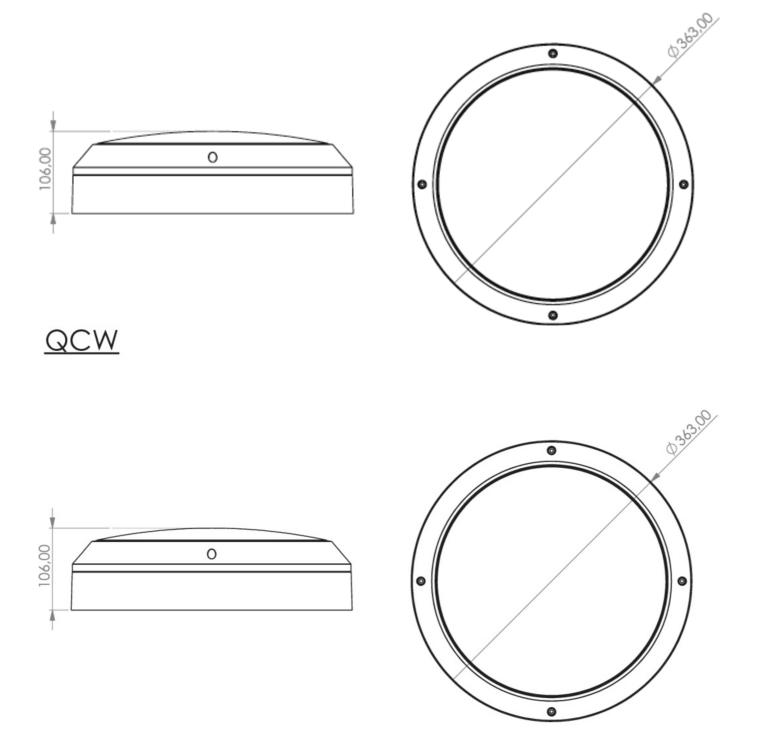

As of: 29.04.2025 - Subject to technical changes and errors.