



**Art.-Nr: QCW529CC-AZ**

**General light, Emergency light Centralised power supply systems**

**Universal, CoreCompact 24 (CC), CPS, , IP54, Zinc die-cast, Anthracite**

Round zinc die-cast LED luminaire, as combined safety luminaire in a timeless design.

Alongside the general-purpose lighting, it also includes an integrated safety light function. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example.

Control and monitoring via central 24 V low-power system.



More information

[www.rp-group.com/en/item/QCW529CC-AZ](http://www.rp-group.com/en/item/QCW529CC-AZ)



## TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltageAC	24 V
Power max.	19 W
Power maintained	17 W




Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	106 mm
Diameter	363 mm
Weight	2.5
Weight incl. packaging	2.83
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	1600 lm
Luminous flux emergency	470 lm
Customs tariff number	94056180
EAN	4262483023655




TECHNICAL DRAWING

QCW

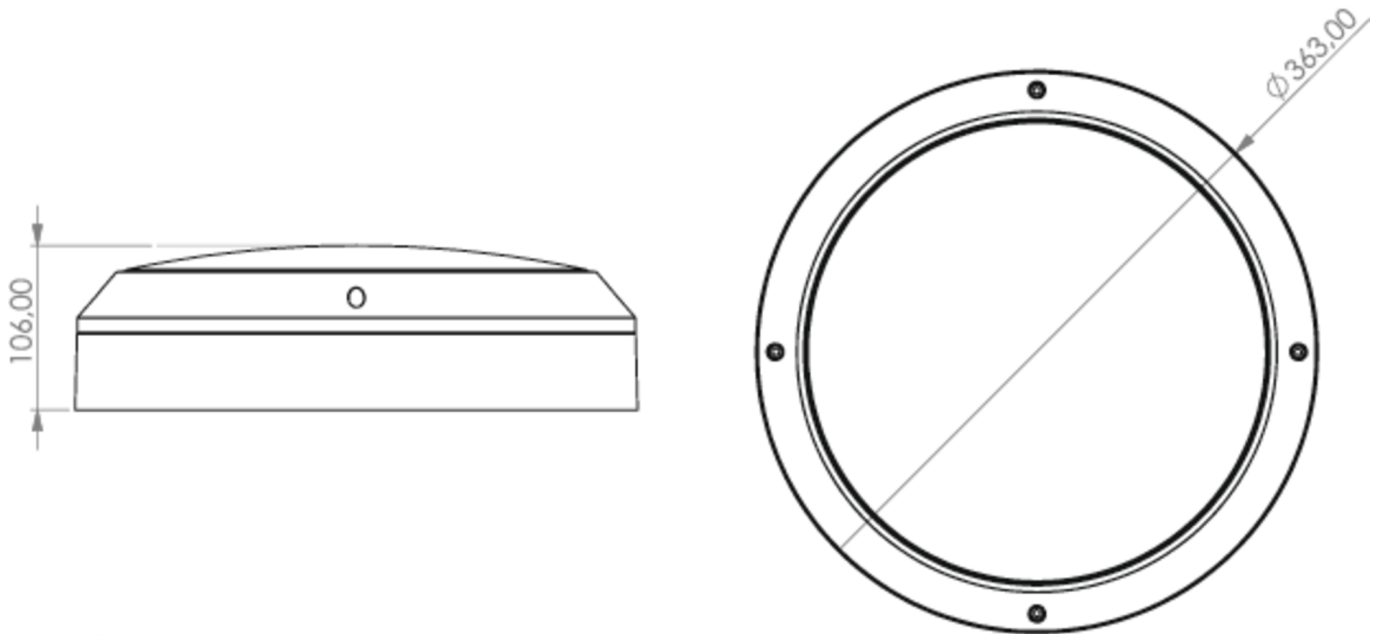

QCW

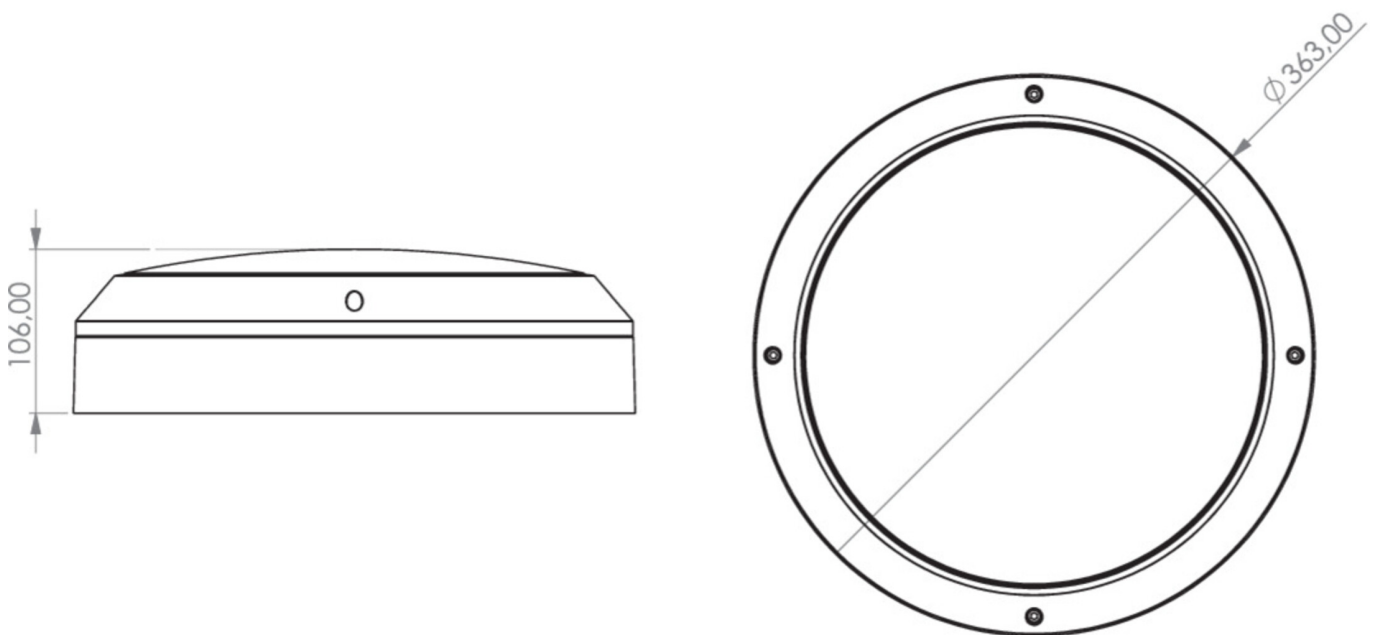

As of: 29.04.2025 - Subject to technical changes and errors.