



Art.-Nr: QGW019



More information
www.rp-group.com/en/item/QGW019




TECHNICAL DATA

Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,5 W
Power maintained	4,5 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C
Ambient temperature non-maintained mode	-25 °C
Depth	94 mm
Width	300 mm
Height	300 mm
Weight	0.16
Weight incl. packaging	0.48
Connection cross-section	1.5 mm ²



Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	250 lm
Luminous flux emergency	250 lm
Customs tariff number	94056120
GTIN	4260123684457

TECHNICAL DRAWING

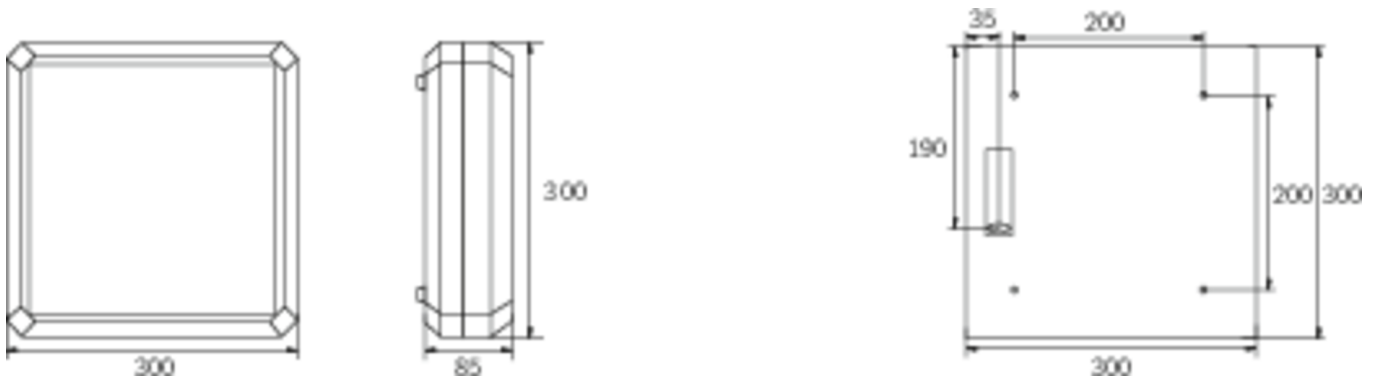

As of: 04.09.2025 - Subject to technical changes and errors.