



Art.-No.: TR-15381B-NWD
Track - LED / 15W - 1600 - 840 - 33° - anthrazit

LED track luminaires, Track series, with multi-adapter for 3-phase busbars, 230V. Housing made from die-cast aluminium, white or anthracite, powder-coated. Can be rotated 350° horizontally and swivelled 90° vertically. Interchangeable PC lenses, non-yellowing, for various beam angles (20° - 60°). Operating unit can be switched or dimmed (DALI dimmer), installed.



DANE TECHNICZNE


Electrical data	
Input Voltage AC	AC 220-240V / 50-60Hz
Power Factor	0,9
System power	15 W
Inrush current	0,98 A
Luminaires on B10A fuse	68 Stk.
Luminaires on B16A fuse	108 Stk.
Luminaires on C10A fuse	90 Stk.
Luminaires on C16A fuse	144 Stk.
Dimming	DALI
Electrical version	with internal operating device, dimmable
Photometrical data	
Light source	LED
Colour temperature	4 000 K
Rated luminous flux	1 600 lm
Luminous efficacy	107 lm/W
Light colour	840
Colour rendering index (CRI)	> 80
Colour tolerance	4
Beam angle	33 °
UGR	16,7
Lifetime (h, at 25°C)	50 000 h, L70



Acceptance tests	
Certifications	CE, ROHS
Protection class	II
Ingress protection (IP) rating	IP 20
Glow wire test	650° C
Ambient temperature	-20 to +40 C°
Physical data	
Housing material	Aluminium
Housing colour	white
Cover material	PMMA
Length (L)	184 mm
Width (B)	150 mm
Height (H)	85 mm
Swivable (horizontal)	350 °
Swivable (vertical)	90 °
Product weight	0,65 kg
Weight incl. Packaging	0,67 kg
Packaging Length (L)	208 mm
Packaging Width (B)	140 mm
Packaging Height (H)	110 mm



LIGHT DISTRIBUTION

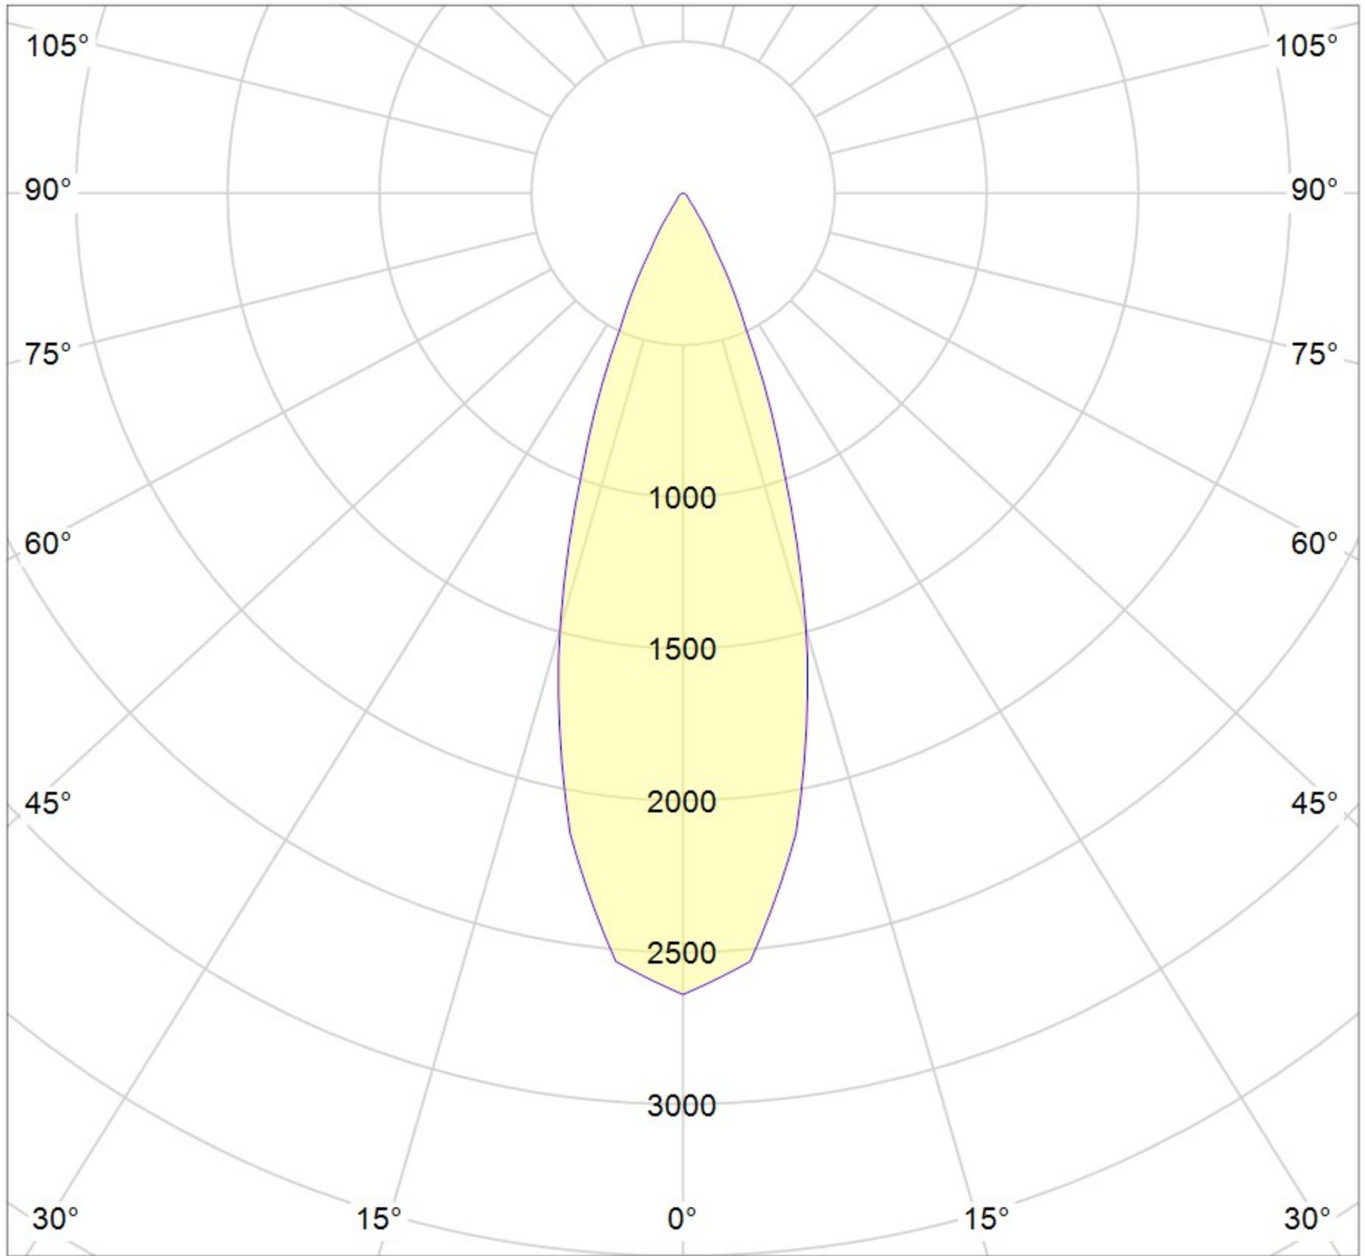

cd/klm
— C0 - C180 — C90 - C270

$\eta = 100\%$