



**Art.-Nr: U6E011**

**Exit sign Self-contained**

**Recessed wall mounting, Without monitoring, 1 h, 22 m, IP40, Metal, White**

Metal emergency exit sign luminaire integrated into the wall.

Planning certainty is provided by tool-free, variable use of the pictograms on site.

A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/U6E011](http://www.rp-group.com/en/item/U6E011)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Self-contained
Monitoring	Without monitoring
Bridging time	1 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	6,1 W
Power maintained	4,5 W
Power non-maintained	0,35 W



Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	65 mm
Width	280 mm
Height	160 mm
Installation length	239 mm
Installation width	128 mm
Installation height	65 mm
Weight	1.2
Weight incl. packaging	1.47
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	300 lm
Customs tariff number	94056180
EAN	4260682144942



## TECHNICAL DRAWING

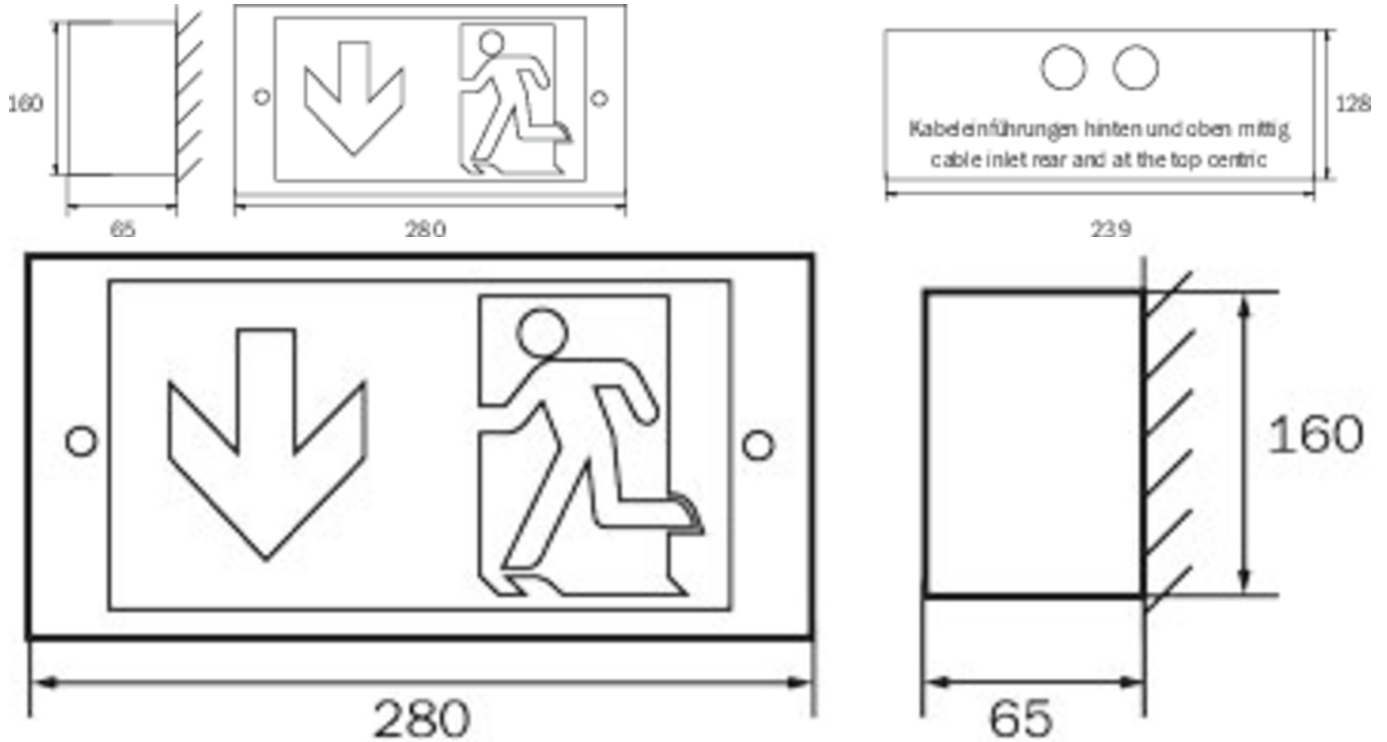

## ACCESSORY LIST

U6BE -

## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main-tenance	max. luminai-res	Single luminai-re monitoring
U6E011SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself

As of: 27.05.2025 - Subject to technical changes and errors.