



## Exit sign Art.-No.: U8E013WL

Integrated into the wall the escape route indication luminaire adapts to the interior design. The variable use and toolless change of the pictograms provides planning security. LED escape route luminaire for recessed wall mounting to DIN EN 60598-1, EN 60598-2-22, EN 7010 and DIN EN 1838th.




### TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed wall
Viewing distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Colour	RAL 9003
Mechanical rating IP	40
Impact resistance IK	≥ 3
Protection class	1
Supply	Single battery
Monitoring	WL - Wireless Professional
Operation time	3 h
Battery	12V/0,8Ah NiMH
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	7,5 W
Power consumption maintained	7,5 W
Power consumption non-maintained	3,6 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	65 mm
Width	375 mm



Height	200 mm
Install. dim. length	336 mm
Install. dim. width	160 mm
Install. dim. height	65 mm
Weight	1.67 kg
Weight incl. Packaging	1.85 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Clamp
Dimming function	Yes
Luminous flux mains mode	150 lm
Luminous flux emergency mode	150 lm
Customs tariff number	94056180
Coutry of origin	Germany
EAN	4260659563806

## TECHNICAL DRAWING

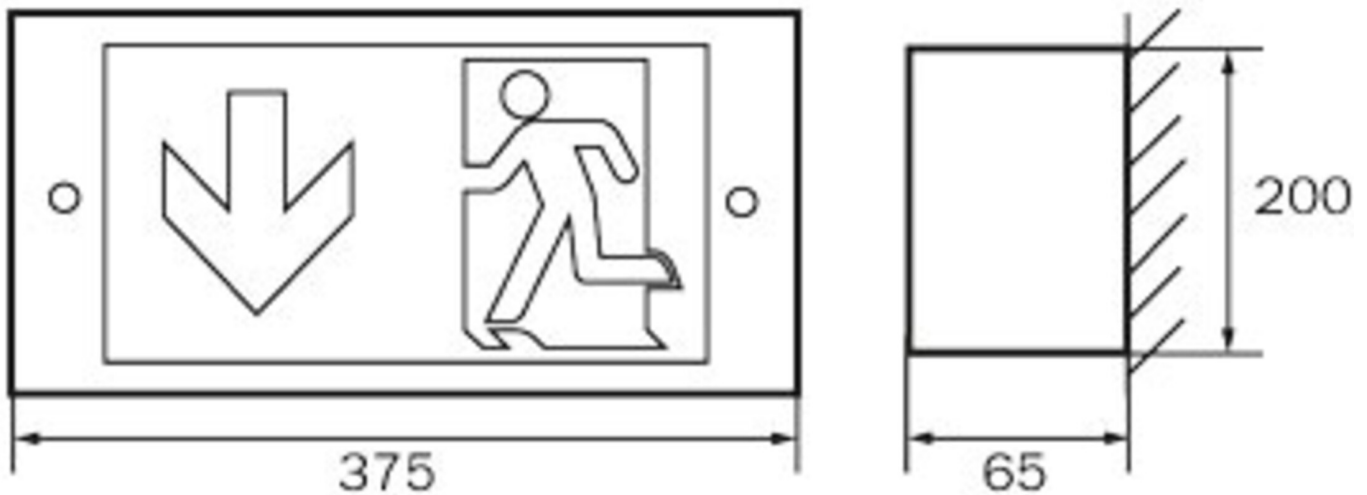

## ACCESSORIES

U8BE - U8 concrete housing