



Exit sign Art.-No.: U8E019ML

Integrated into the wall the escape route indication luminaire adapts to the interior design. The variable use and toolless change of the pictograms provides planning security. LED escape route luminaire for recessed wall mounting to DIN EN 60598-1, EN 60598-2-22, EN 7010 and DIN EN 1838th.




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed wall
Viewing distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Colour	RAL 9003
Mechanical rating IP	40
Impact resistance IK	≥ 3
Protection class	1
Supply	Central power supply system
Monitoring	ML - Central power supply system
Operation time	CPS
Operation mode	single luminaire switching
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	216 V
Power consumption max.	5,2 W
Power consumption maintained	5,2 W
Power consumption non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C / 40 °C
Ambient temperature non-maintained mode	-20 °C / 40 °C
Length	65 mm
Width	375 mm
Height	200 mm



Install. dim. length	336 mm
Install. dim. width	160 mm
Install. dim. height	65 mm
Weight	1.37 kg
Weight incl. Packaging	1.55 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	None
Dimming function	Yes
Luminous flux mains mode	300 lm
Luminous flux emergency mode	300 lm
Customs tariff number	94056180
Country of origin	Germany
EAN	4260123687892

TECHNICAL DRAWING

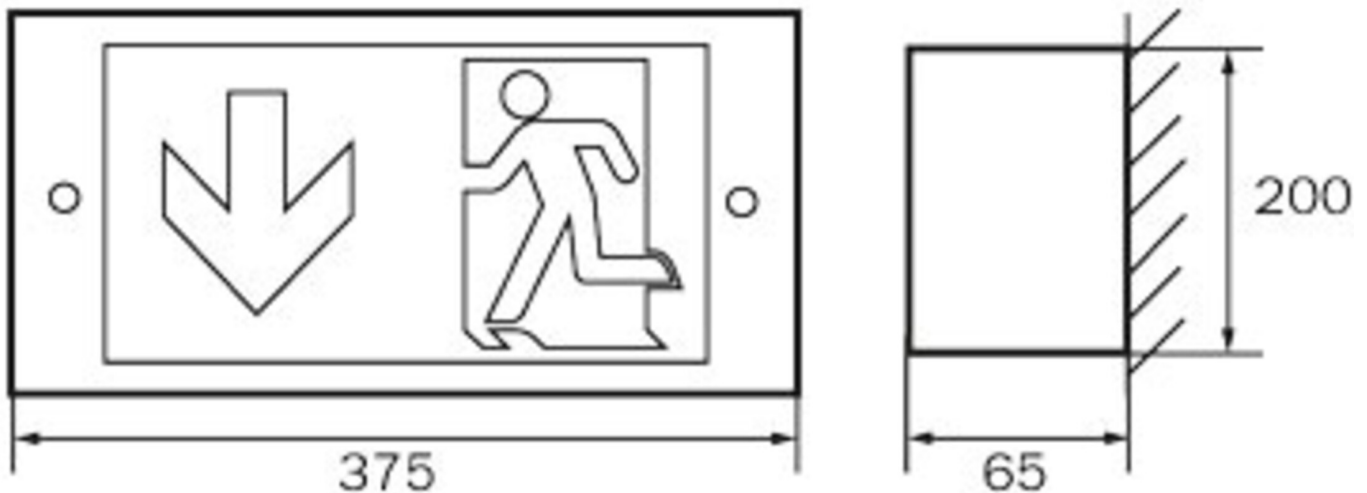

ACCESSORIES

U8BE - U8 concrete housing