



Art.-Nr: U8E413SC
Exit sign Self-contained
Recessed wall mounting, SelfControl (SC), 1 h, 34 m, IP40,
Metal, White

Metal emergency exit sign luminaire integrated into the wall.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information
www.rp-group.com/en/item/U8E413SC



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 3,2 V/1,6 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 230 V
Input frequency	50 Hz
Power max.	4,2 W
Power maintained	3,3 W



Power non-maintained	0,9 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	65 mm
Width	375 mm
Height	200 mm
Installation length	336 mm
Installation width	160 mm
Installation height	65 mm
Weight	1.42
Weight incl. packaging	1.6
Connection cross-section	2,5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Customs tariff number	94056180
GTIN	4262483026304



TECHNICAL DRAWING

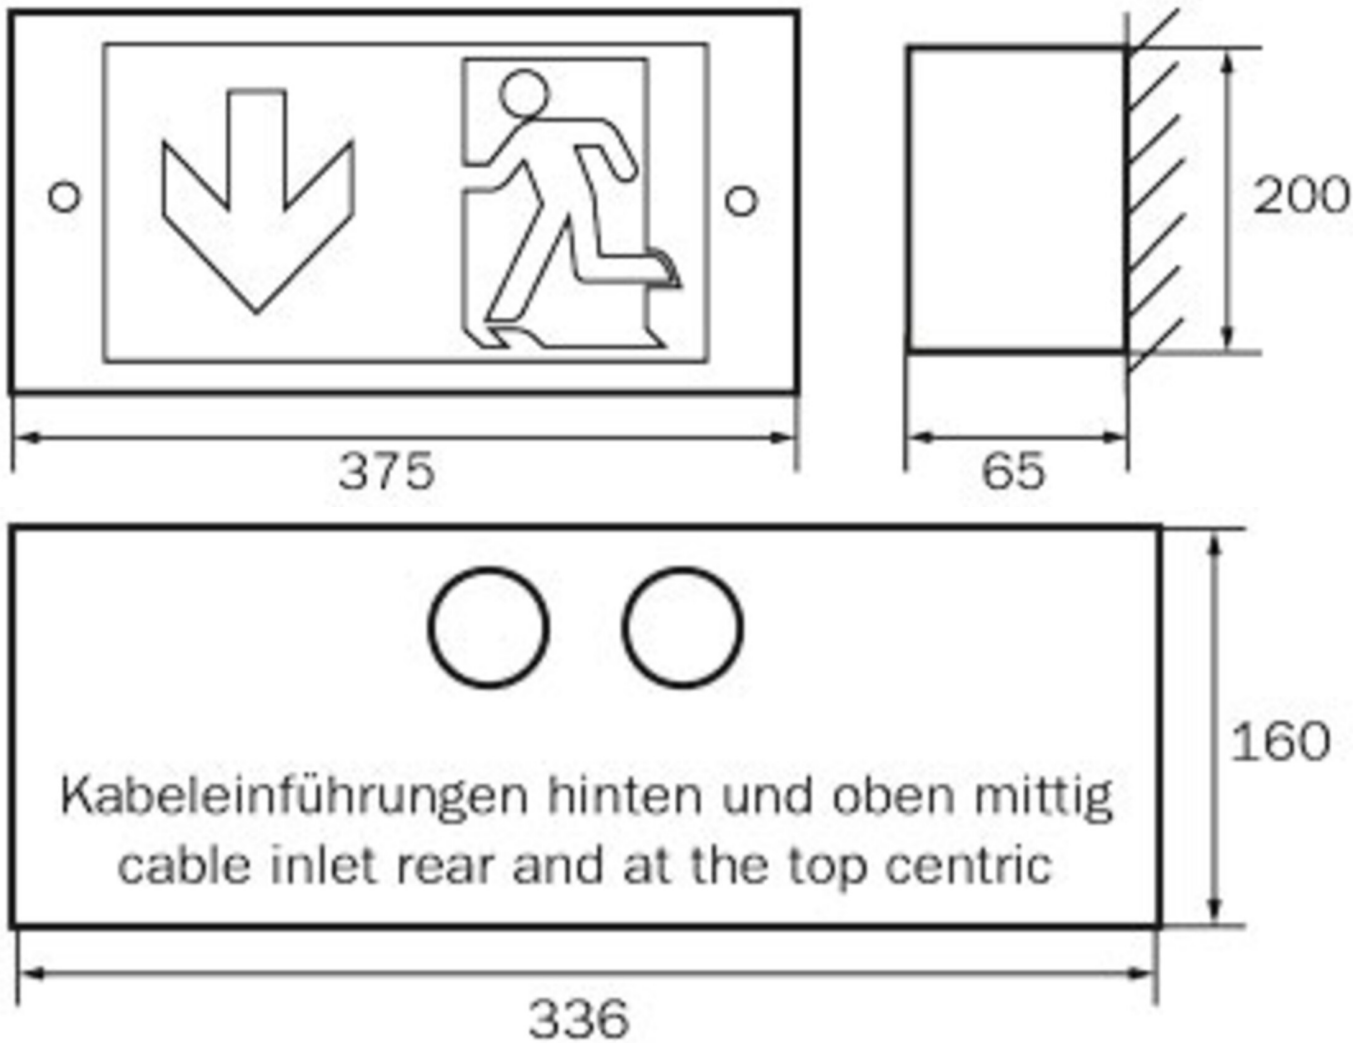

ACCESSORY LIST

U8BE -

As of: 17.09.2025 - Subject to technical changes and errors.