



## Exit sign

**Art.-No.: V2W013SC-V4A**

High quality vandal proof high-grade steel luminaire for wall mounting according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838 for the marking and lighting of escape and rescue routes. Suitable for maintained or non-maintained mode.





### TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall mounted
Viewing distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	high-grade steel
Colour	Stainless steel look
Mechanical rating IP	65
Impact resistance IK	≥ 3
Protection class	1
Supply	Single battery
Monitoring	Self-Control
Operation time	3 h
Battery	4,8V/2,0Ah NiMH
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Power consumption max.	6,1 W
Power consumption maintained	4,5 W
Power consumption non-maintained	0,35 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	56 mm
Width	386 mm
Height	240 mm



Weight	6.16 kg
Weight incl. Packaging	6.64 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	Yes
Battery connector	Plug
Dimming function	Yes
Luminous flux mains mode	220 lm
Luminous flux emergency mode	150 lm
Customs tariff number	94056180
Country of origin	Germany
EAN	4260659563837

## TECHNICAL DRAWING

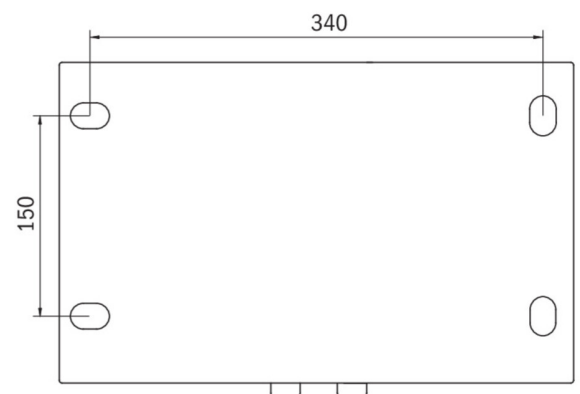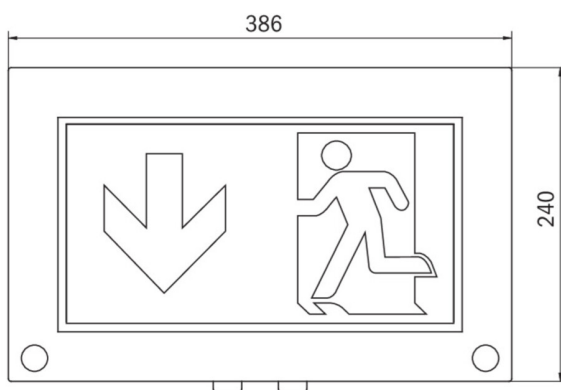

## ACCESSORIES

BALL2 - Ball protection (8W) 450x280x125mm