



Exit sign Art.-No.: V2W019-V4A

High quality vandal proof high-grade steel luminaire for wall mounting according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838 for the marking and lighting of escape and rescue routes. Suitable for maintained or non-maintained mode.





TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall mounted
Viewing distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	high-grade steel
Colour	Stainless steel look
Mechanical rating IP	65
Impact resistance IK	≥ 3
Protection class	1
Supply	Central power supply system
Monitoring	None
Operation time	CPS
Operation mode	Maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	100-254 V
Power consumption max.	4,5 W
Power consumption maintained	4,5 W
Power consumption non-maintained	0 W
Ambient temperature maintained mode	-25 °C / 40 °C
Ambient temperature non-maintained mode	-25 °C / 40 °C
Length	56 mm
Width	386 mm
Height	240 mm



Weight	6.01 kg
Weight incl. Packaging	6.49 kg
Connection cross-section	1.5 mm
Switching input L'	No
Emergency light blocking	No
Battery connector	None
Dimming function	No
Luminous flux mains mode	300 lm
Luminous flux emergency mode	300 lm
Customs tariff number	94056080
Country of origin	Germany

TECHNICAL DRAWING

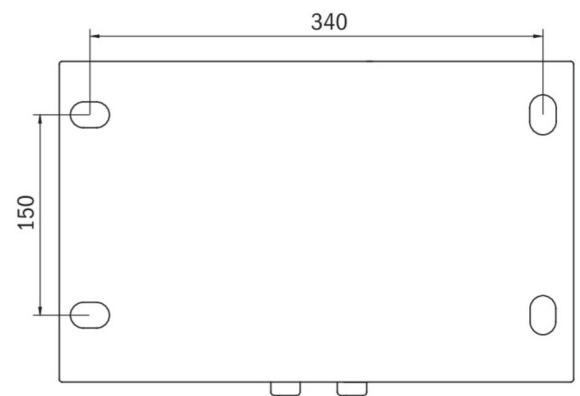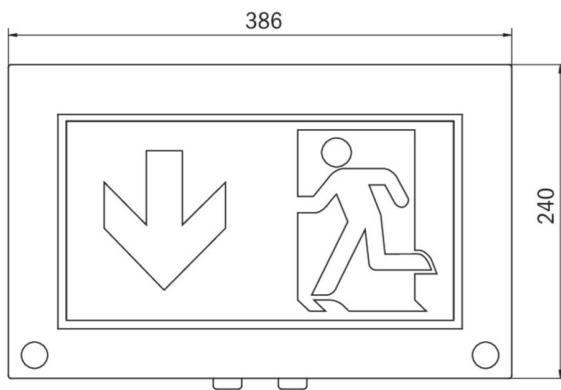

ACCESSORIES

BALL2 - Ball protection (8W) 450x280x125mm