



Art.-Nr: VAW011WL
Exit sign Self-contained
Wall mounting, Wireless Professional (WL), 1 h, 34 m, IP65,
Stainless Steel, Stainless steel

High-grade, vandal-proof, stainless steel luminaire for wall mounting in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838 for identifying and illuminating escape and emergency routes. Available as luminaire with electronic ballast or single-battery luminaire.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information
www.rp-group.com/en/item/VAW011WL



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Stainless Steel
Housing color	Stainless steel
Protection type (IP)	IP65
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	1 h
Battery	NIMH 12 V/0,8 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	7,5 W



Power maintained	7,5 W
Power non-maintained	3,6 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	50 mm
Width	390 mm
Height	220 mm
Weight	3.43
Weight incl. packaging	3.61
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Clip
Dimming function	Yes
Luminous flux mains	150 lm
Luminous flux emergency	150 lm
Customs tariff number	94056180
GTIN	4260659563967



TECHNICAL DRAWING

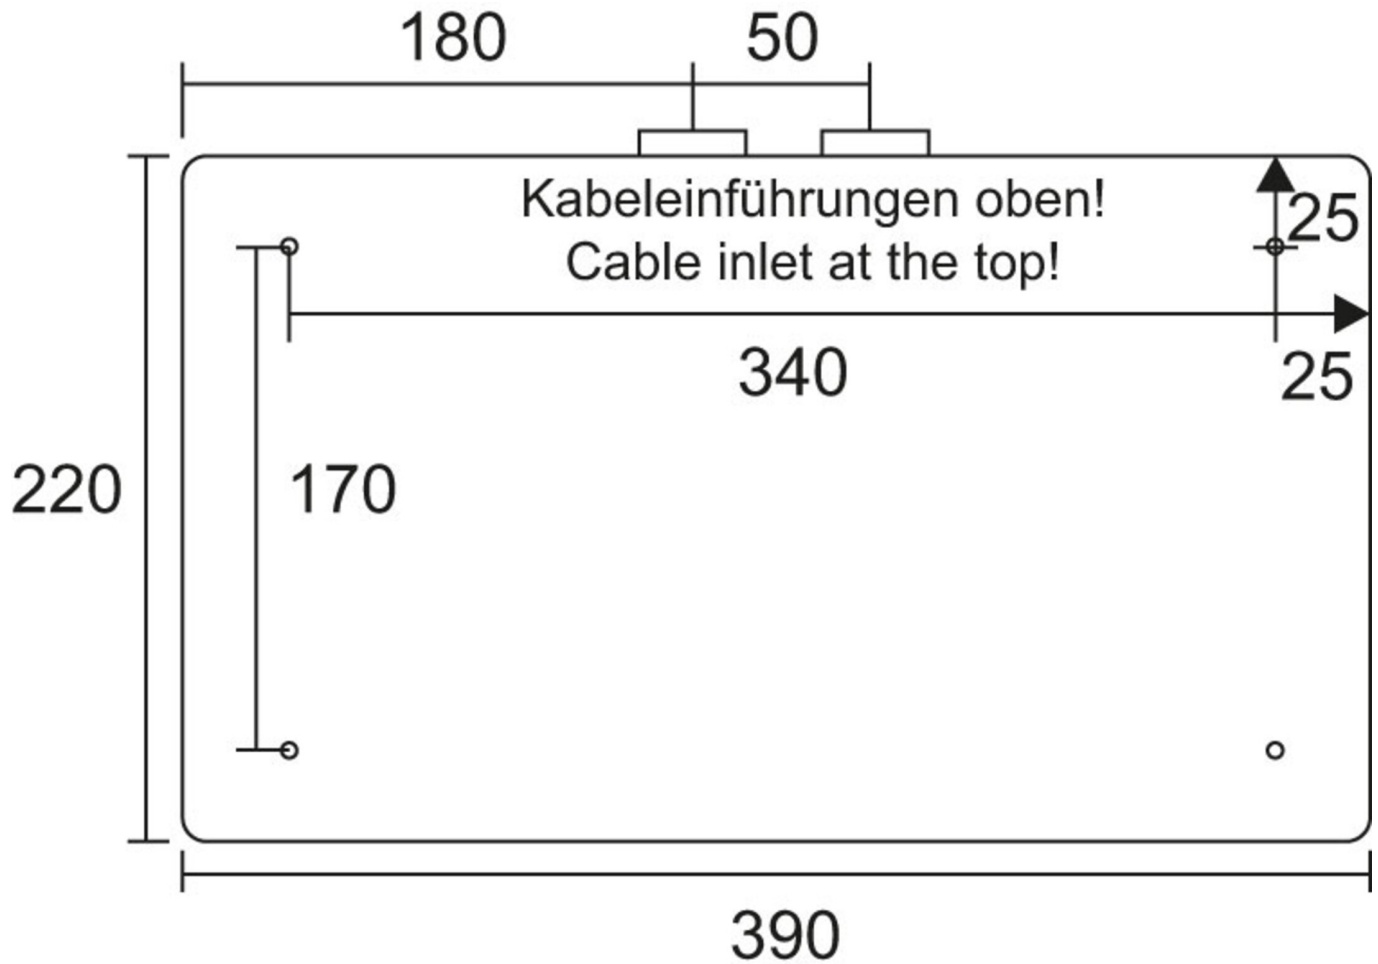

ACCESSORY LIST

NIMH1208P - Battery

As of: 24.06.2025 - Subject to technical changes and errors.