



Art.-Nr: VAW019
Exit sign Centralised power supply systems
Wall mounting, Without monitoring, CPS, 34 m, IP65,
Stainless Steel, Stainless steel

High-grade, vandal-proof, stainless steel luminaire for wall mounting in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838 for identifying and illuminating escape and emergency routes. Available as luminaire with electronic ballast or single-battery luminaire.



More information
www.rp-group.com/en/item/VAW019



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Stainless Steel
Housing color	Stainless steel
Protection type (IP)	IP65
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,5 W
Power maintained	4,5 W



Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	50 mm
Width	390 mm
Height	220 mm
Weight	3.1
Weight incl. packaging	3.28
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056180
EAN	4260123682910



TECHNICAL DRAWING

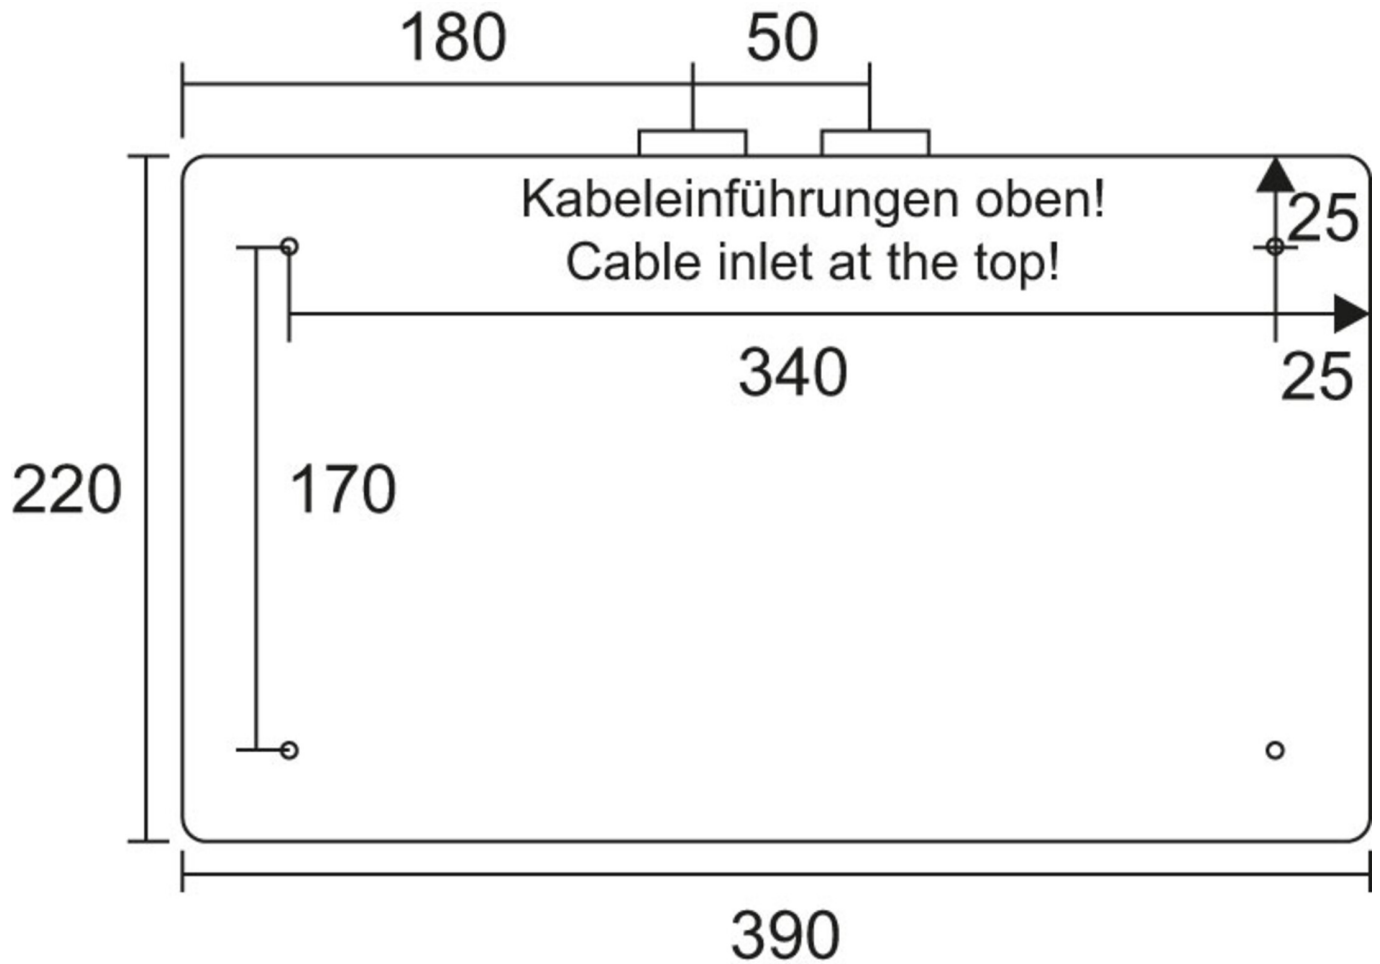

As of: 16.05.2025 - Subject to technical changes and errors.