




Art.-Nr: WAF029ML-AZ

**Emergency light Centralised power supply systems
Wall mounting, Central power supply (ML), CPS, , IP20, Zinc
die-cast, Anthracite**

High-grade zinc die-cast safety luminaire for surface mounting on the wall.

The radiating characteristics run parallel to the wall to help perfectly illuminate escape and emergency routes.

Control and monitoring via central power supply system.

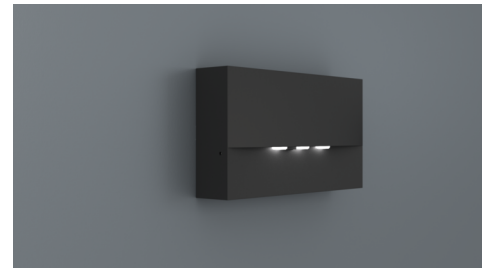

More information

www.rp-group.com/en/item/WAF029ML-AZ



TECHNICAL DATA


| | |
|------------------------|----------------------------------|
| Luminaire type | Emergency light |
| Mounting | Wall mounting |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP20 |
| Impact resistance (IK) | 4 |
| Certification | WEEE, CE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 4,5 W |
| Power maintained | 4,5 W |
| Power non-maintained | 1,1 W |



| | |
|---|---------------------|
| Ambient temperature maintained mode | -20 °C to 35 °C |
| Ambient temperature non-maintained mode | -20 °C to 40 °C |
| Depth | 53 mm |
| Width | 193 mm |
| Height | 115 mm |
| Weight | 0.07 |
| Weight incl. packaging | 0.1 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Luminous flux mains | 420 lm |
| Luminous flux emergency | 420 lm |
| Customs tariff number | 94056180 |
| EAN | 4260581710972 |



TECHNICAL DRAWING

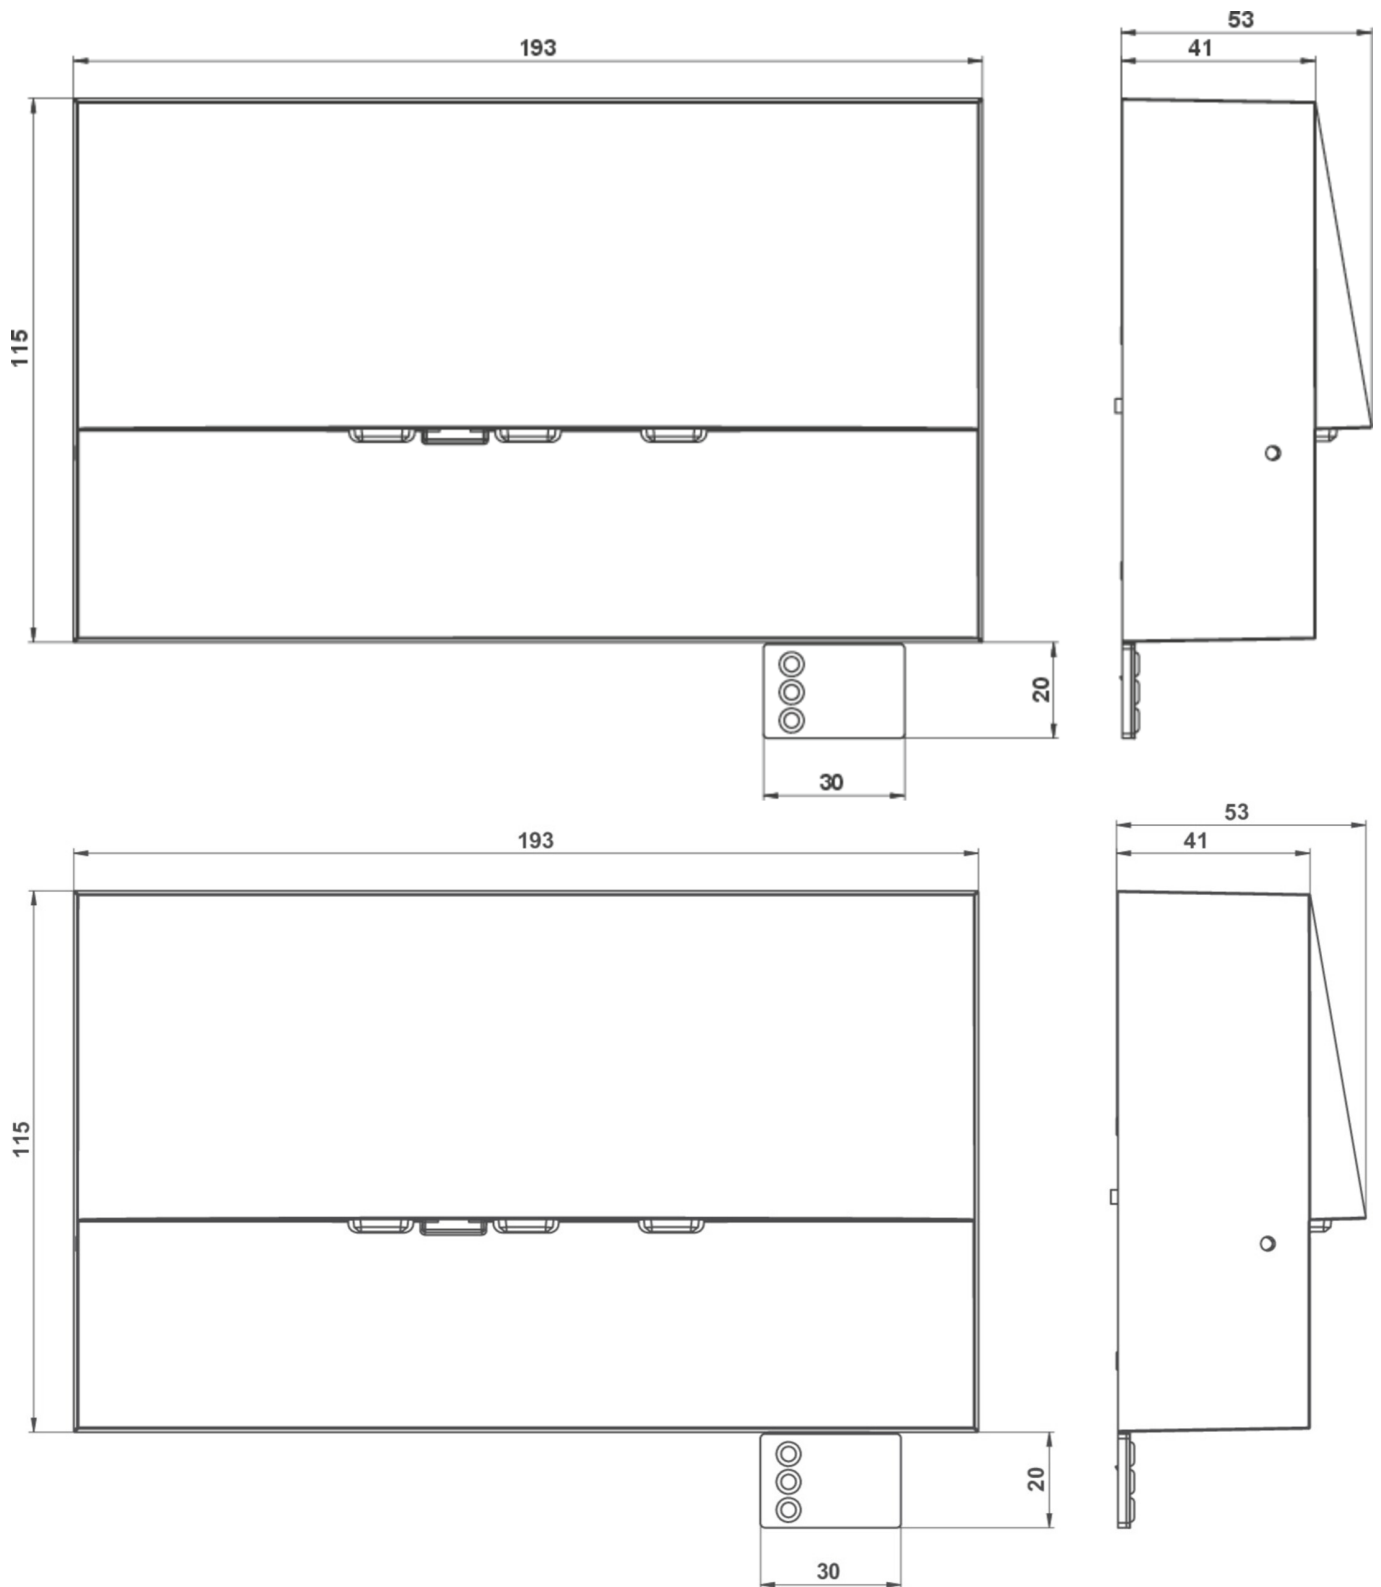

As of: 29.04.2025 - Subject to technical changes and errors.