




Emergency luminaire Art.-No.: WAF423WL

LED emergency luminaire for surface wall mounting for the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838. It is harmonized with the design of the WEF or WER recessed wall luminaires and fit together with the exit signs of the A-series.

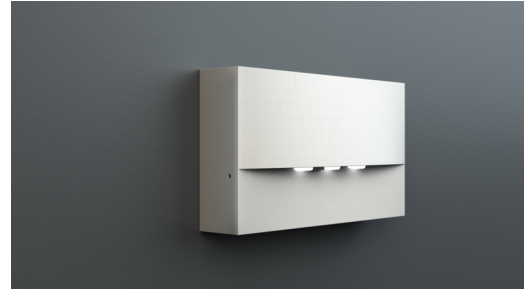

TECHNICAL DATA

| | |
|-----------------------------------------|--------------------------------|
| Luminaire type | Emergency luminaire |
| Mounting | Wall mounted |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Colour | RAL 9003 |
| Mechanical rating IP | 20 |
| Impact resistance IK | 4 |
| Protection class | 2 |
| Supply | Single battery |
| Monitoring | WL - Wireless Professional |
| Operation time | 3 h |
| Battery | 6.4V/1.2Ah LiFeP04 |
| Operation mode | maintained/non-maintained mode |
| Input Voltage AC | 230 V |
| Input Frequency Hz | 50 Hz |
| Power consumption max. | 5,1 W |
| Power consumption maintained | 3,9 W |
| Power consumption non-maintained | 0,8 W |
| Ambient temperature maintained mode | -5 °C / 35 °C |
| Ambient temperature non-maintained mode | -5 °C / 40 °C |
| Length | 193 mm |
| Width | 53 mm |
| Height | 115 mm |
| Weight | 0.22 kg |



| | |
|------------------------------|---------------|
| Weight incl. Packaging | 0.25 kg |
| Connection cross-section | 2.5 mm |
| Switching input L' | Yes |
| Emergency light blocking | No |
| Battery connector | Plug |
| Dimming function | Yes |
| Luminous flux mains mode | 420 lm |
| Luminous flux emergency mode | 315 lm |
| Customs tariff number | 94056180 |
| Country of origin | Germany |
| EAN | 4260766551918 |

TECHNICAL DRAWING

