




## Emergency luminaire Art.-No.: WEF423WL-AZ

LED emergency luminaire for wall installation and for the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838. The discreet recessed luminaire is designed for installation in conventional double jacks. The mounting frame can be aligned with the jack. The zinc-aluminum cover is attached without externally visible fastening. Through the status LED which is incorporated in the lens the harmony of the housing is not interrupted.

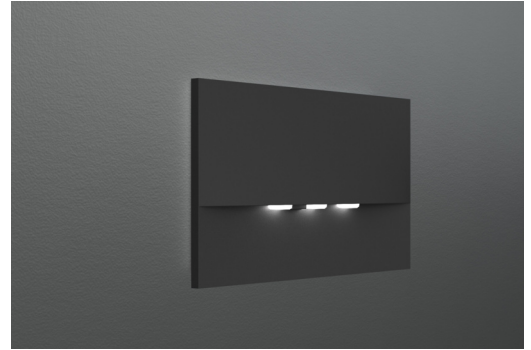

### TECHNICAL DATA

|   |                                |
|---|--------------------------------|
| Luminaire type                          | Emergency luminaire            |
| Mounting                                | Recessed wall                  |
| Pictograph                              | No                             |
| Illuminant                              | LED                            |
| Housing material                        | Zinc die casting               |
| Colour                                  | RAL 7016                       |
| Mechanical rating IP                    | 20                             |
| Impact resistance IK                    | 7                              |
| Protection class                        | 2                              |
| Supply                                  | Single battery                 |
| Monitoring                              | WL - Wireless Professional     |
| Operation time                          | 3 h                            |
| Battery                                 | 6.4V/1.2Ah LiFeP04             |
| Operation mode                          | maintained/non-maintained mode |
| Input Voltage AC                        | 230 V                          |
| Input Frequency Hz                      | 50 Hz                          |
| Power consumption max.                  | 5,1 W                          |
| Power consumption maintained            | 3,9 W                          |
| Power consumption non-maintained        | 0,8 W                          |
| Ambient temperature maintained mode     | -5 °C / 40 °C                  |
| Ambient temperature non-maintained mode | -5 °C / 40 °C                  |
| Length                                  | 20 mm                          |
| Width                                   | 161 mm                         |
| Height                                  | 107 mm                         |



|                              |               |
|------------------------------|---------------|
| Install. dim. length         | 155 mm        |
| Install. dim. width          | 82 mm         |
| Install. dim. height         | 70 mm         |
| Weight                       | 0.63 kg       |
| Weight incl. Packaging       | 0.66 kg       |
| Connection cross-section     | 2.5 mm        |
| Switching input L'           | Yes           |
| Emergency light blocking     | No            |
| Battery connector            | Plug          |
| Dimming function             | Yes           |
| Luminous flux mains mode     | 420 lm        |
| Luminous flux emergency mode | 315 lm        |
| Customs tariff number        | 94056180      |
| Coutry of origin             | Germany       |
| EAN                          | 4260766557316 |



**TECHNICAL DRAWING**

