



Art.-Nr: WFXW519CC

Exit sign Centralised power supply systems

**Wall mounting, CoreCompact 24 (CC), CPS, 30 m, IP65,
Polycarbonate, White**

Modern emergency exit sign wall luminaire in a square format.

For identifying escape and emergency routes. As an option, the luminaire can be used to identify other adjoining rooms.

The high level of protection can be ensured thanks to the easy-to-mount bayonet catch, making the luminaire suitable for varied use.

Control and monitoring via central 24 V low-power system. The requested pictogram (arrow to the right, left, up or down) is supplied as standard.



More information

www.rp-group.com/en/item/WFXW519CC



TECHNICAL DATA




Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	4
Certification	WEEE, CE, D-Sign
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltageAC	24 V
Power max.	5,1 W






Power maintained	5,1 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	300 mm
Width	300 mm
Height	110 mm
Weight	1.3
Weight incl. packaging	1.55
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056180
EAN	4260682157706



TECHNICAL DRAWING

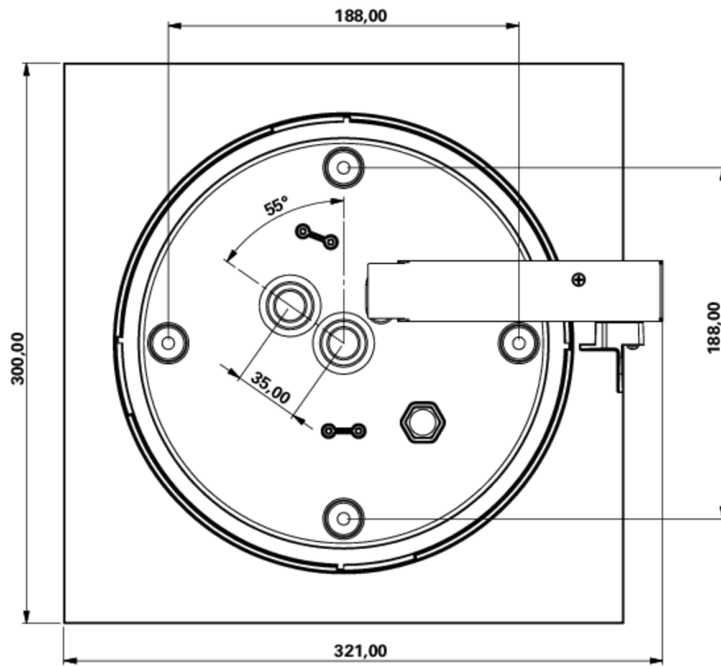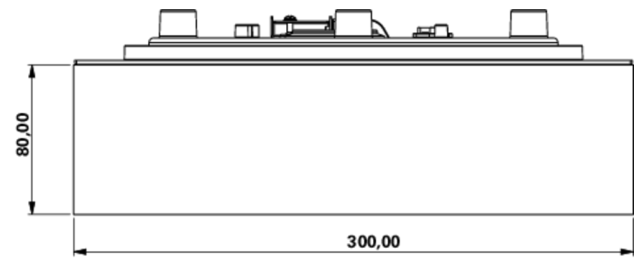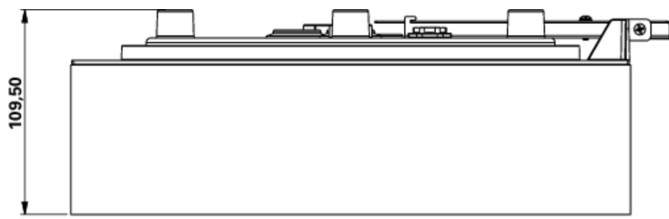

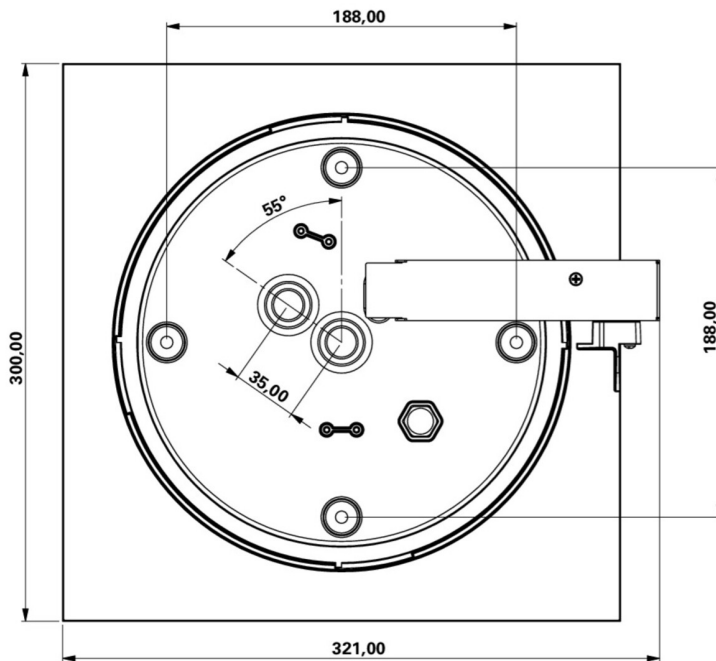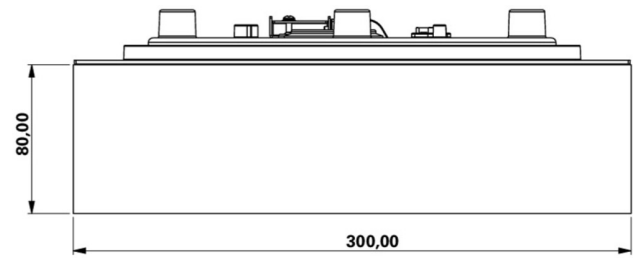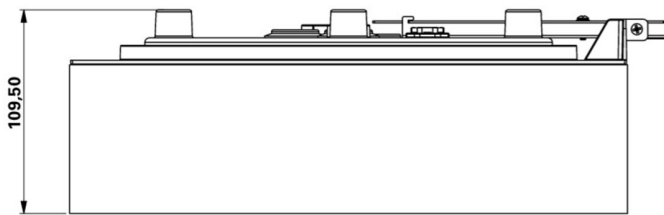

As of: 01.04.2025 - Subject to technical changes and errors.