



## Exit sign Art.-No.: WGD018WL

This polycarbonate luminaire with its cube shape is visible from 4 directions. That makes it ideal for use with crossroads e.g. in department stores with several isles. Planning security is provided through logically predefined imprinted pictograms. LED escape route indication luminaire in accordance with DIN EN 605981, EN 60598-2-22, EN 7010 and DIN EN 1838th



### TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Ceiling mounted
Viewing distance	46 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Colour	RAL 9003
Mechanical rating IP	20
Impact resistance IK	≥ 3
Protection class	1
Supply	Single battery
Monitoring	WL - Wireless Professional
Operation time	8 h
Battery	12V/0,8Ah NiMH
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	7,5 W
Power consumption maintained	7,5 W
Power consumption non-maintained	3,6 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	237 mm
Width	237 mm



Height	237 mm
Weight	1.49 kg
Weight incl. Packaging	1.63 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Clamp
Dimming function	Yes
Luminous flux mains mode	150 lm
Luminous flux emergency mode	60 lm
Customs tariff number	94056120
Country of origin	Germany
EAN	4260659564131



## TECHNICAL DRAWING

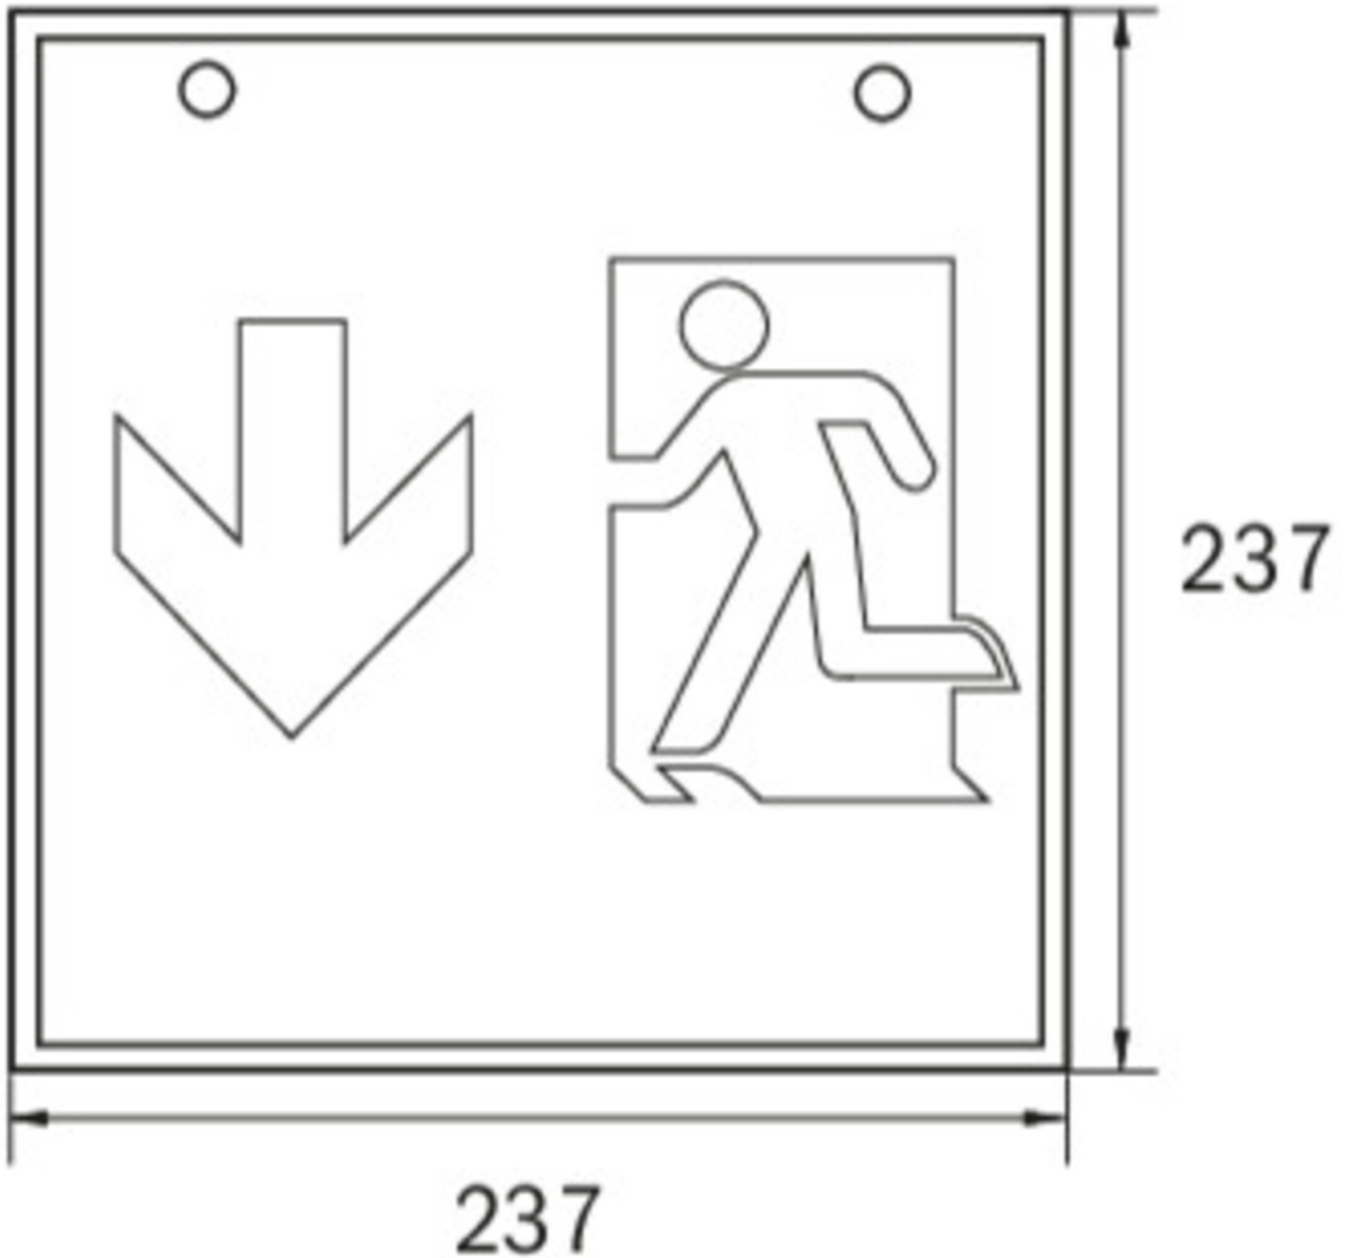

## ACCESSORIES

WKO - Set out of 4 x chain eyelet

1PV-EB -