



**Art.-Nr: WGD019ML**


**Exit sign Centralised power supply systems**

**Recessed mounting, Central power supply (ML), CPS, 46 m, IP20, Metal, white**

Square emergency exit sign cube luminaire for identifying escape and emergency routes. It can be mounted straight onto the ceiling or suspended using the appropriate accessories.

The cube shape means that this plastic luminaire is easily recognisable from four sides. Ideal for use where routes intersect, e.g. in large stores with aisles.

Control and monitoring via central power supply system. Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).

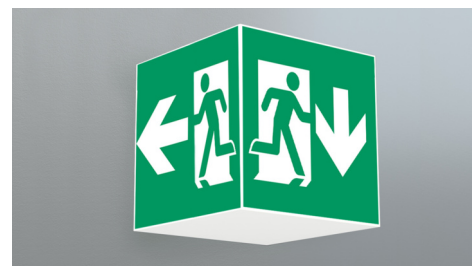

More information  
[www.rp-group.com/en/item/WGD019ML](http://www.rp-group.com/en/item/WGD019ML)



## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	46 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	white
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz




Input voltage DC	216 V
Power max.	5,2 W
Power DS	5,2 W
Power BS	1,1 W
Ambient temperature DS	-20 °C to 40 °C
Ambient temperature BS	-20 °C to 40 °C
Depth	237 mm
Width	237 mm
Height	237 mm
Weight	1.19
Weight incl. packaging	1.33
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	250 lm
Luminous flux emergency	250 lm
Customs tariff number	94056120
EAN	4260581710019




## TECHNICAL DRAWING




237

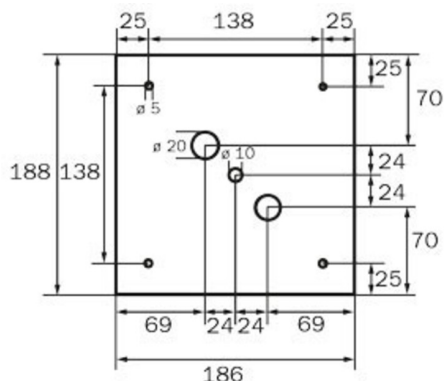

WG

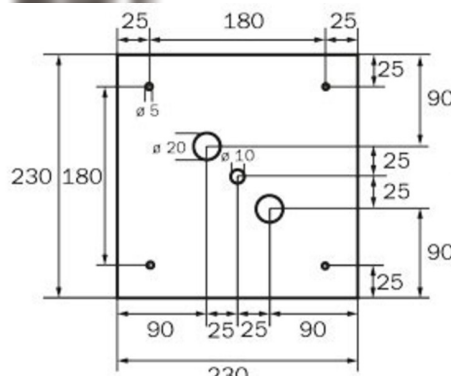


WK

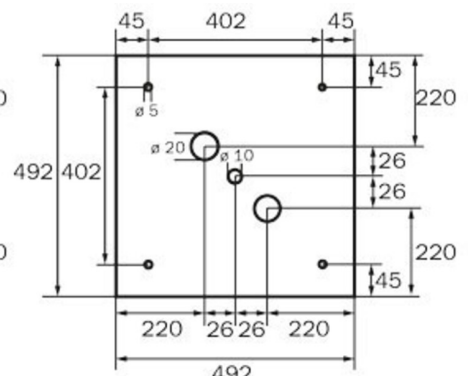


WX




WG

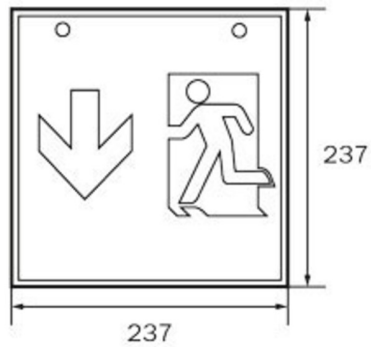

WK

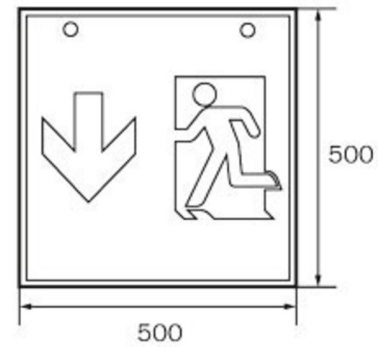

WX

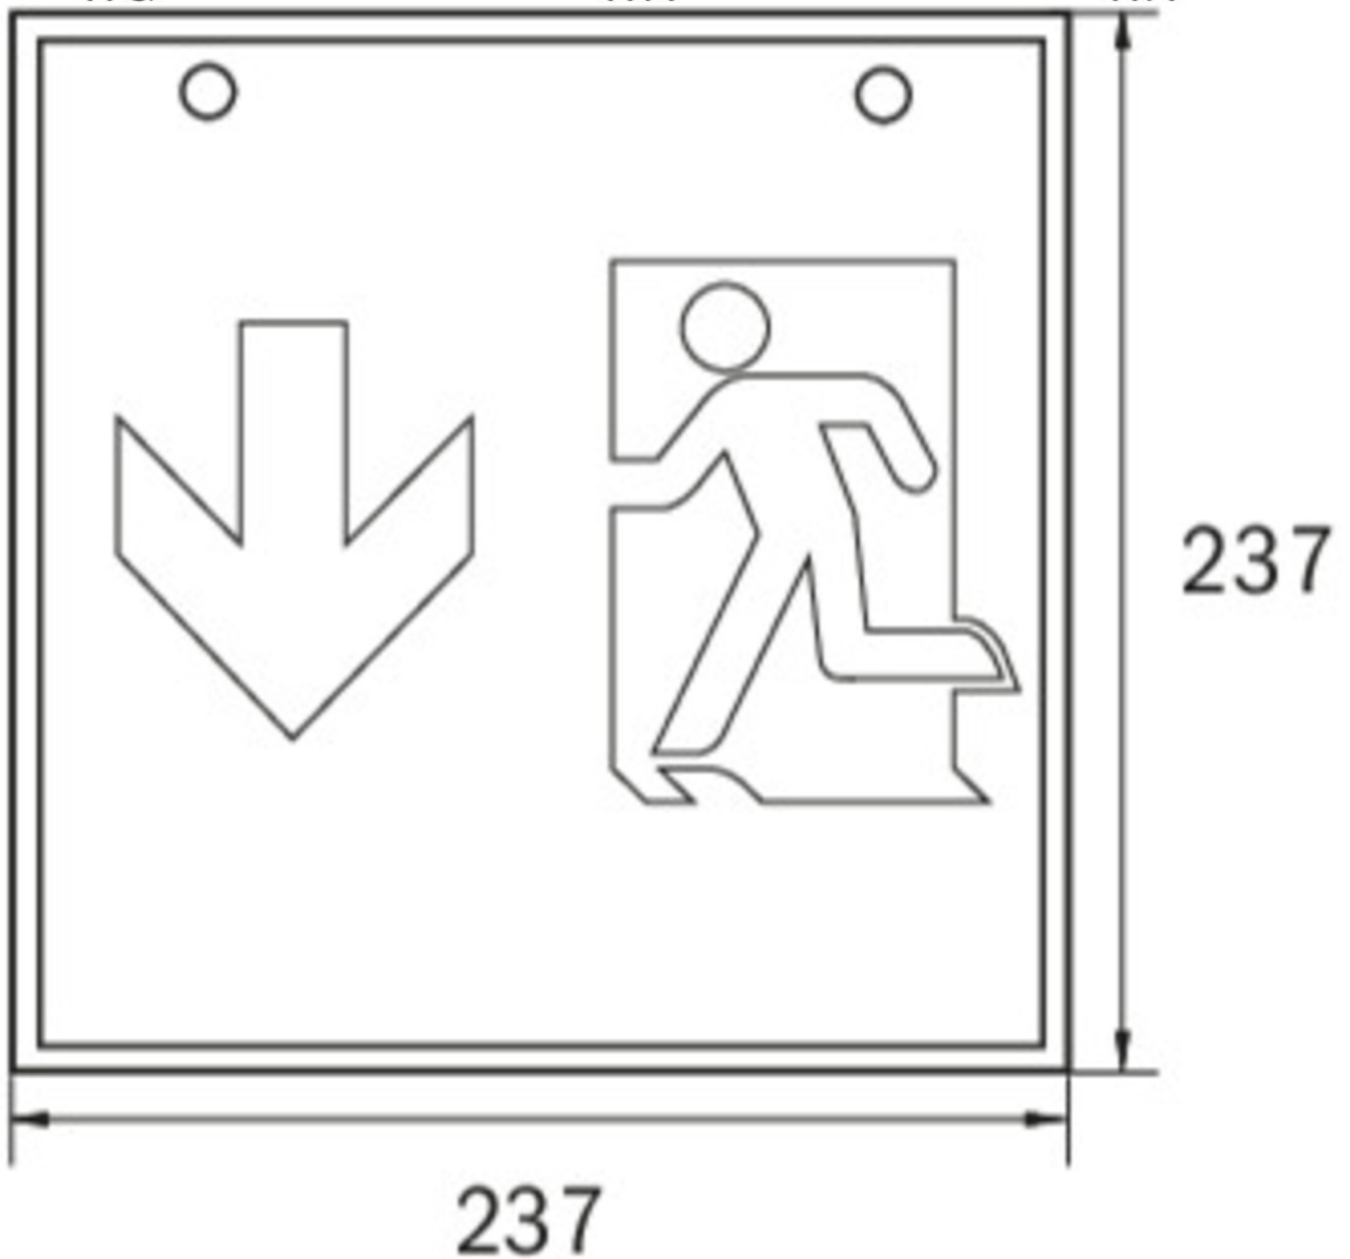



## ACCESSORY LIST

WKO -

1PV-EB -

DSA-Y4M-APA - Wire suspension

DSA-Y4M - Wire suspension

As of: 21.01.2025 - Subject to technical changes and errors.