



Exit sign Art.-No.: WGS029

This polycarbonate luminaire with its cube shape is visible from 4 directions. That makes it ideal for use with crossroads e.g. in department stores with several isles. Planning security is provided through logically predefined imprinted pictograms. LED escape route indication luminaire in accordance with DIN EN 605981, EN 60598-2-22, EN 7010 and DIN EN 1838th



TECHNICAL DATA


| | |
|---|-----------------------------|
| Luminaire type | Exit sign |
| Mounting | Ceiling mounted |
| Viewing distance | 46 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Metal |
| Colour | RAL 9003 |
| Mechanical rating IP | 20 |
| Impact resistance IK | ≥ 3 |
| Protection class | 1 |
| Supply | Central power supply system |
| Monitoring | None |
| Operation time | CPS |
| Operation mode | Maintained mode |
| Input Voltage AC | 230 V |
| Input Frequency Hz | 50 / 60 Hz |
| Input Voltage DC | 100-254 V |
| Power consumption max. | 3,9 W |
| Power consumption maintained | 3,9 W |
| Power consumption non-maintained | 0 W |
| Ambient temperature maintained mode | -25 °C / 40 °C |
| Ambient temperature non-maintained mode | -25 °C / 40 °C |
| Length | 237 mm |
| Width | 237 mm |
| Height | 237 mm |



| | |
|------------------------------|----------|
| Weight | 1.16 kg |
| Weight incl. Packaging | 1.3 kg |
| Connection cross-section | 1.5 mm |
| Switching input L' | No |
| Emergency light blocking | No |
| Battery connector | None |
| Dimming function | No |
| Luminous flux mains mode | 300 lm |
| Luminous flux emergency mode | 300 lm |
| Customs tariff number | 94056020 |
| Coutry of origin | Germany |



TECHNICAL DRAWING

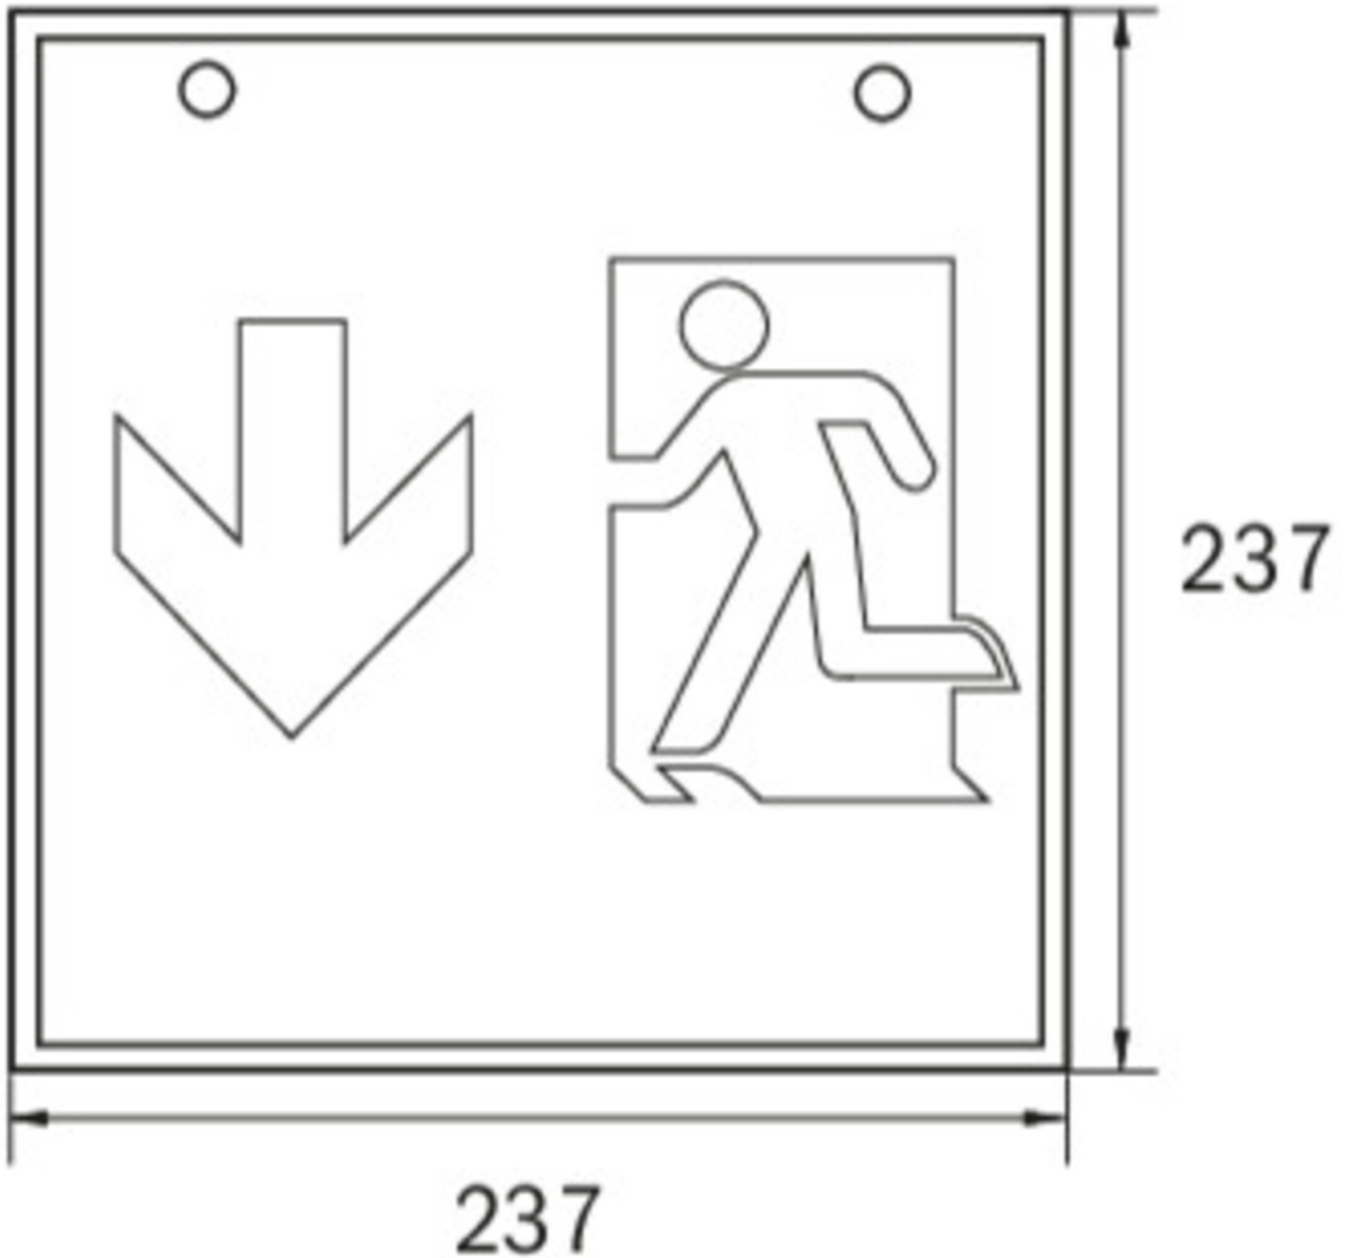

ACCESSORIES

WKO - Set out of 4 x chain eyelet

1PV-EB -