



**Art.-Nr: WXD019ML**


**Exit sign Centralised power supply systems**

**Surface mounting, Central power supply (ML), CPS, 90 m, IP20, Metal, White**

Square emergency exit sign cube luminaire for identifying escape and emergency routes. It can be mounted straight onto the ceiling or suspended using the appropriate accessories.

The cube shape means that this plastic luminaire is easily recognisable from four sides. Ideal for use where routes intersect, e.g. in large stores with aisles.

Control and monitoring via central power supply system. Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).

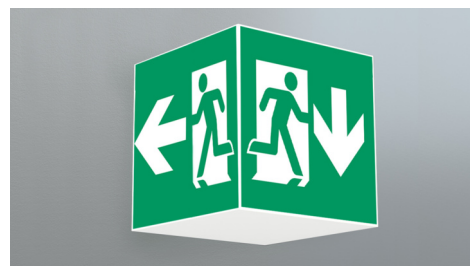

More information

[www.rp-group.com/en/item/WXD019ML](http://www.rp-group.com/en/item/WXD019ML)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	90 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz




Input voltage DC	216 V
Power max.	5,4 W
Power maintained	5,4 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	500 mm
Width	500 mm
Height	500 mm
Weight	6.49
Weight incl. packaging	6.63
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	470 lm
Luminous flux emergency	470 lm
Customs tariff number	94056120
EAN	4260123684228




## TECHNICAL DRAWING

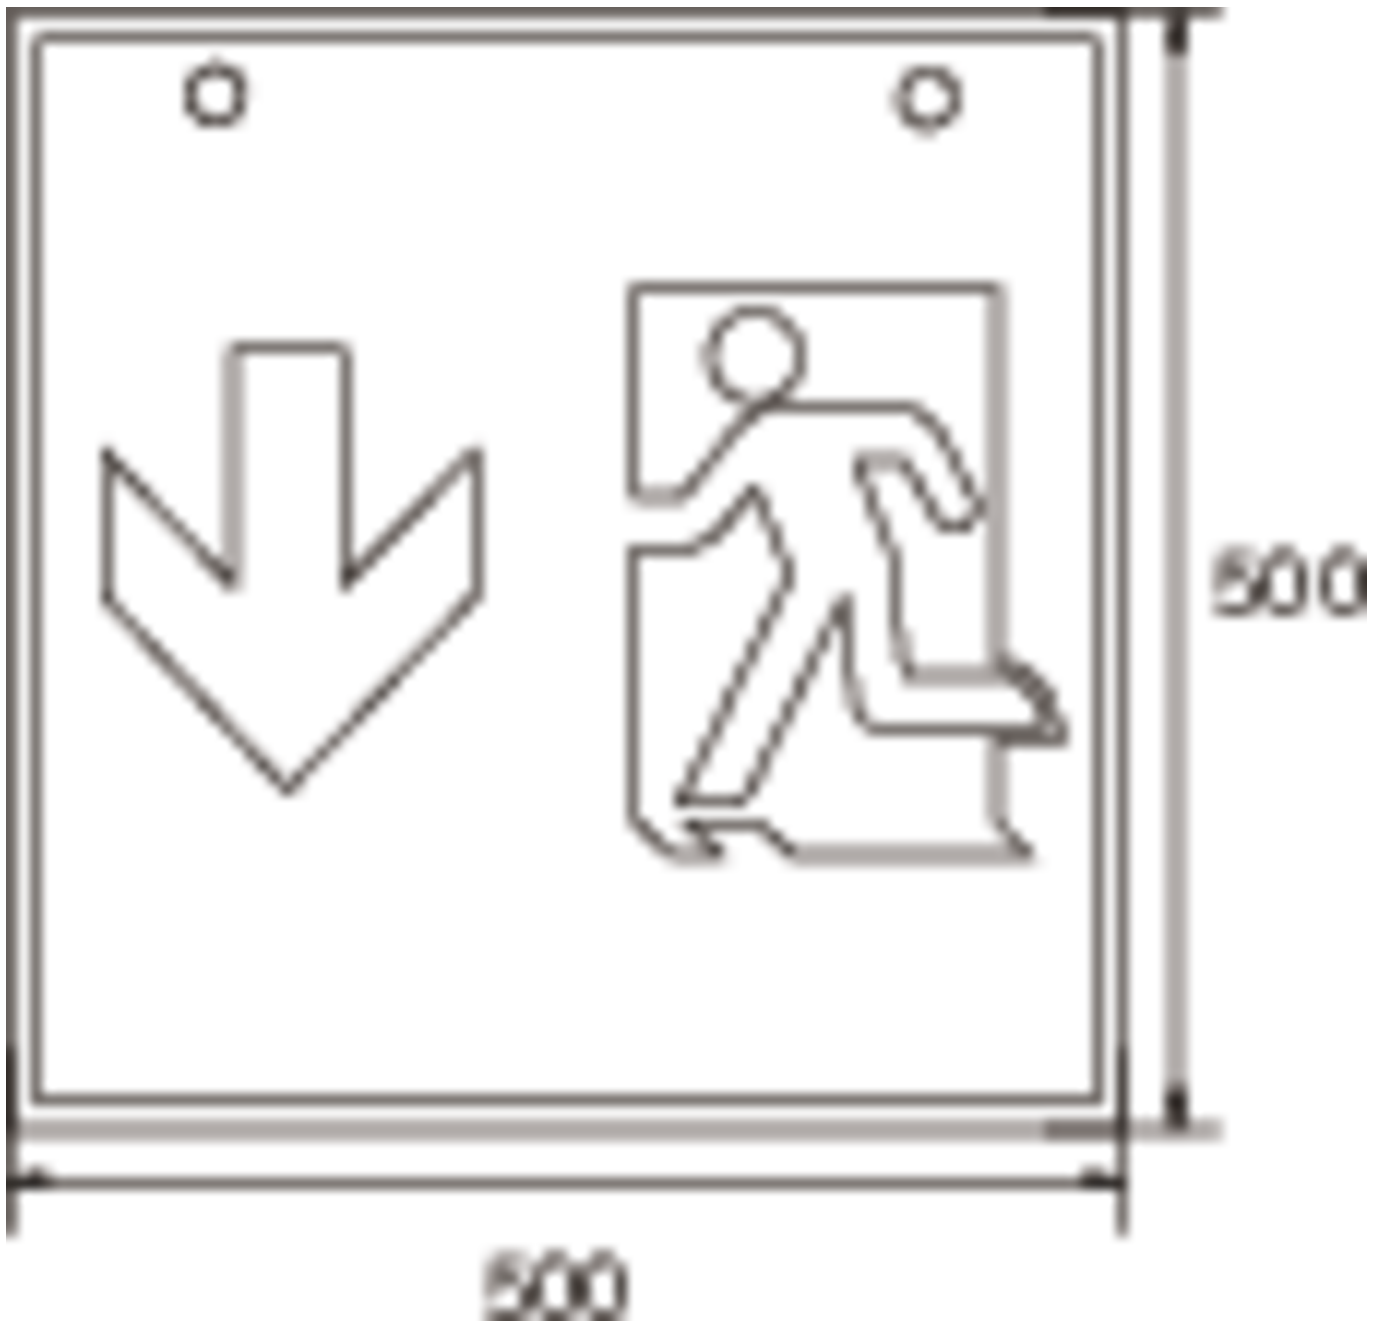


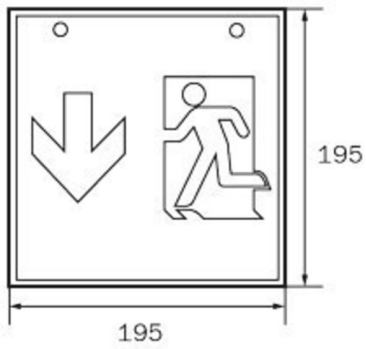


WK

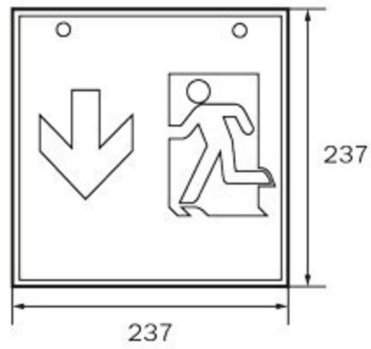

WG

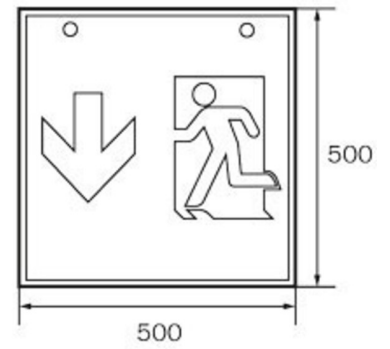

WX

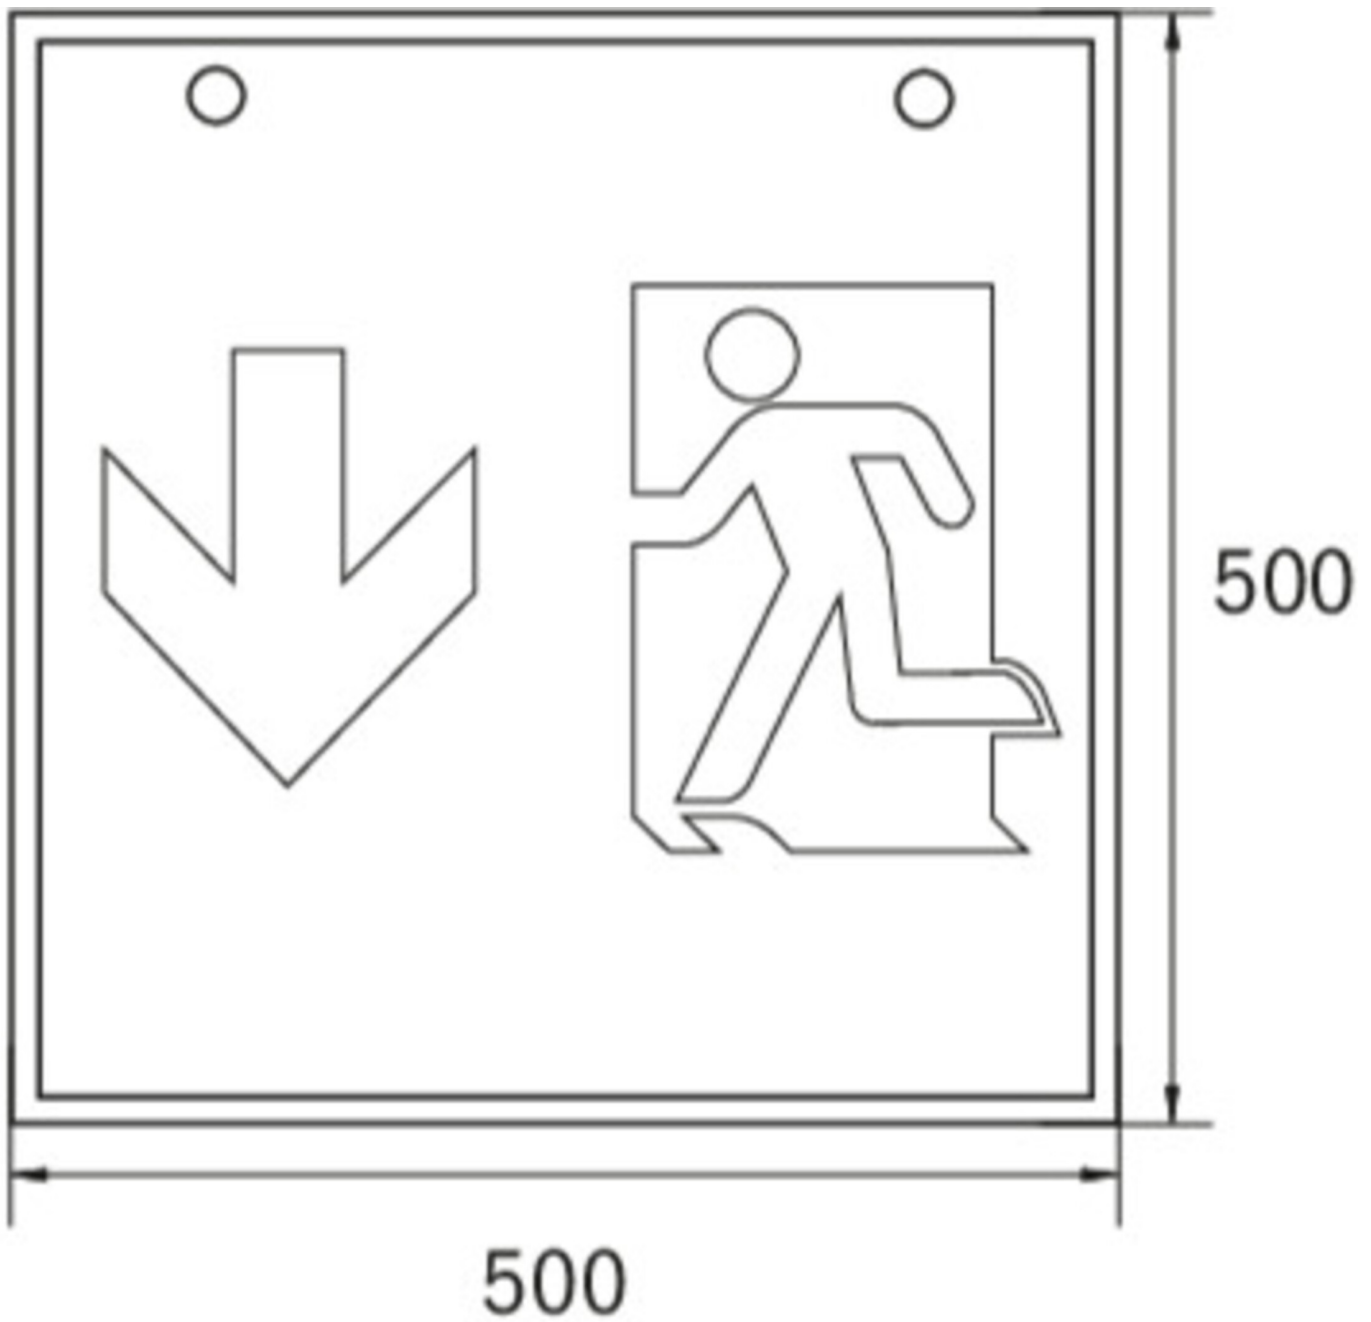

#### ACCESSORY LIST

WKO -  
1PV-EB -

As of: 04.04.2025 - Subject to technical changes and errors.