



Art.-Nr: YEDTA-REND-1401-U

LED recessed downlight "TAURE", round, 226x110mm, 14W, 1950lm, 4000K, CRI >80, IP54, UGR <19, white, Dali dimmable

LED recessed downlight, TAURE series. IP54. Housing made from aluminium, white, powder-coated. Smooth aluminium reflector. Operating unit can be switched or dimmed (DALI dimmer), external. UGR < 19 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI® Bluetooth control available. DC compatibility on request. Ra > 90 on request.



More information

www.rp-group.com/en/item/YEDTA-REND-1401-U



TECHNICAL DATA


| Dimensions | |
|-----------------------------|-----------|
| Diameter | 226 mm |
| Product dimensions Height | 110 mm |
| Product weight | 1 kg |
| Packaging dimensions | |
| Packaging dimensions Length | 230 mm |
| Packaging dimensions Width | 230 mm |
| Packaging dimensions Height | 120 mm |
| Weight incl. packaging | 1.1 kg |
| Cutout Dimensions | |
| Diameter | 210 mm |
| Color | |
| Color | White |
| Housing material | |
| Housing material | Aluminium |
| Certification | |
| Insulation class | 2 |
| Protection type (IP) | IP54 |
| Glow wire test | 650 °C |
| Electrical connection | |





| | |
|---|--------------------------------------|
| Connection cross-section | 1.5 mm ² |
| Type of dimming | DALI |
| System performance | 14 W |
| Input voltage AC | 220-240V / 50-60Hz V |
| Starting current | 5 A |
| Power factor | 0.92 PF |
| Starting time | 50 µs |
| power supply | |
| Number of power supply units on LS B10A | 30 pcs. |
| Number of power supply units on LS B16A | 50 pcs. |
| Number of power supply units at LS C10A | 50 pcs. |
| Number of power supply units at LS C16A | 83 pcs. |
| Electrical design | with internal control gear, Dimmable |
| Light data | |
| Light source | LED |
| Rated luminous flux | 1950 lm |
| Colour rendering index | > 80 Ra |
| Colour tolerance | 3 |
| Beam angle | 62 ° |
| Color temperature | 4000 K |
| Light color | 840 |
| UGR | 17 |
| Service life | 50000 h, L80 |
| Light yield | 139 lm/w |
| Temperatures | |
| Ambient temperature (Min) | 0 °C |
| Ambient temperature (Max) | +25 °C |
| Mounting | |
| Mounting | Ceiling mounting |



TEXT.LICHTVERTEILUNG

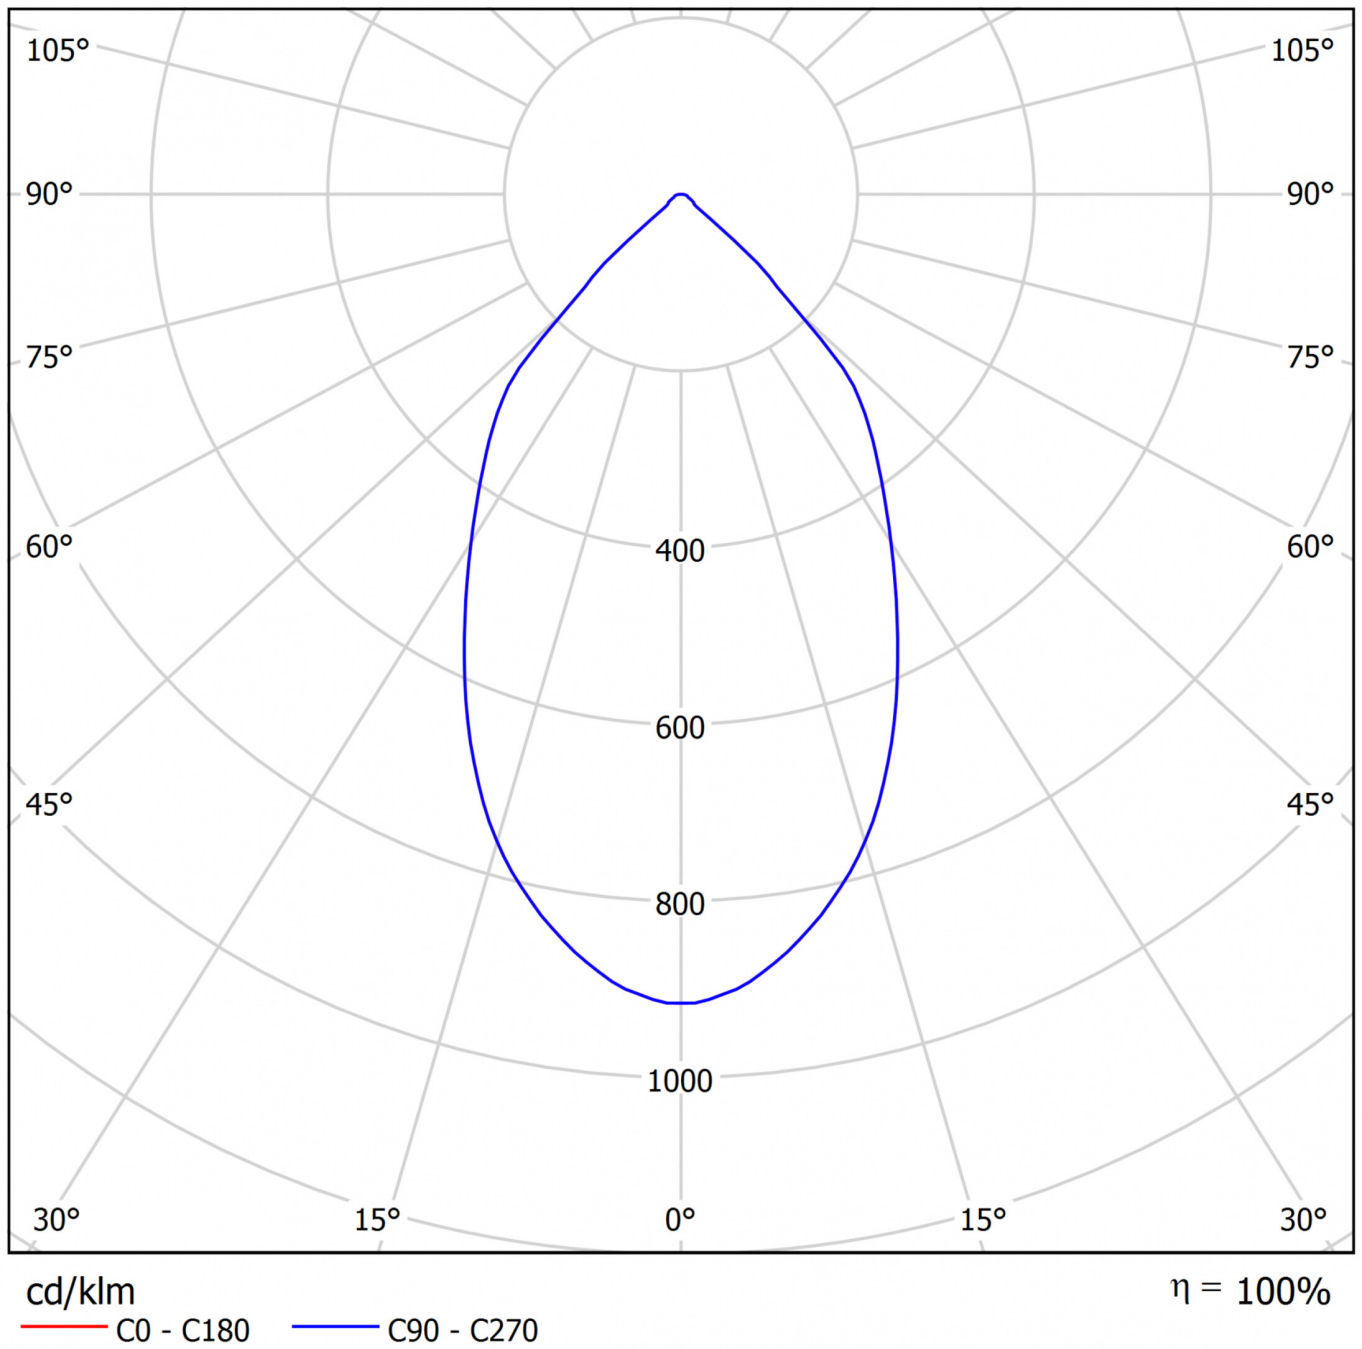

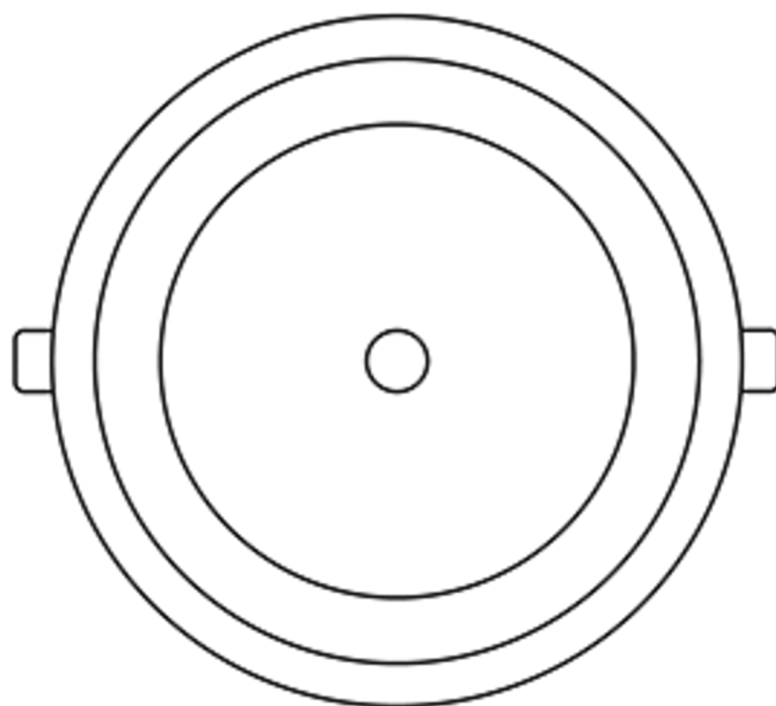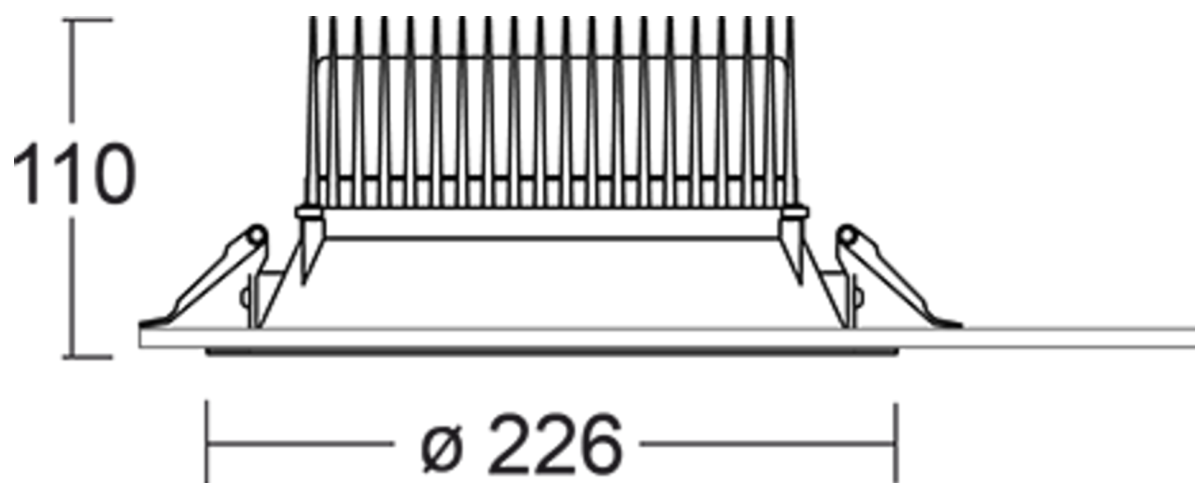

As of: 10.04.2025 - Subject to technical changes and errors.