



Art.-Nr: YFLSO-LANS-3001
LED floodlight "SOLID"
wall / ceiling surface mounting,

LED spotlight, SOLID series. Die-cast aluminium housing, suitable for outdoor use, colour: black, powder-coated. Cover made of tempered glass. Robust housing with IP 66 and high impact resistance IK08. Powerful LED technology with over 140lm/W for effective illumination of large areas. Switchable control gear, built-in. Extremely flexible use thanks to flat design and adjustable angle of inclination. Connection via open cable end.



More information

www.rp-group.com/en/item/YFLSO-LANS-3001



TECHNICAL DATA


| Dimensions | |
|-----------------------------|----------------------|
| Product dimensions Length | 196 mm |
| Product dimensions Width | 183 mm |
| Product dimensions Height | 37 mm |
| Product weight | 900 g |
| Color | |
| Color | Black |
| Housing material | |
| Housing material | Aluminum die-cast |
| Certification | |
| Certification | RoHS, CE |
| Insulation class | 1 |
| Protection type (IP) | IP66 |
| Shock resistance level (IK) | 8 |
| Electrical connection | |
| Rated power | 30 W |
| Input voltage AC | 220-240V / 50-60Hz V |



| | |
|---------------------------|----------------------------|
| Power factor | 0.9 PF |
| power supply | |
| DC suitability | Yes |
| Electrical design | with internal control gear |
| Light data | |
| Light source | LED |
| Rated luminous flux | 4200 lm |
| Colour rendering index | > 70 Ra |
| Beam angle | 97 ° |
| Color temperature | 4000 K |
| Light color | 740 |
| Service life | 120000 h, L80 |
| Light yield | 140 lm/w |
| Temperatures | |
| Ambient temperature (Min) | -30 °C |
| Ambient temperature (Max) | 50 °C |
| CASAMBI Products | |
| Input voltage DC | 216 V |
| Mounting | |
| Mounting | Universal |



TEXT.LICHTVERTEILUNG

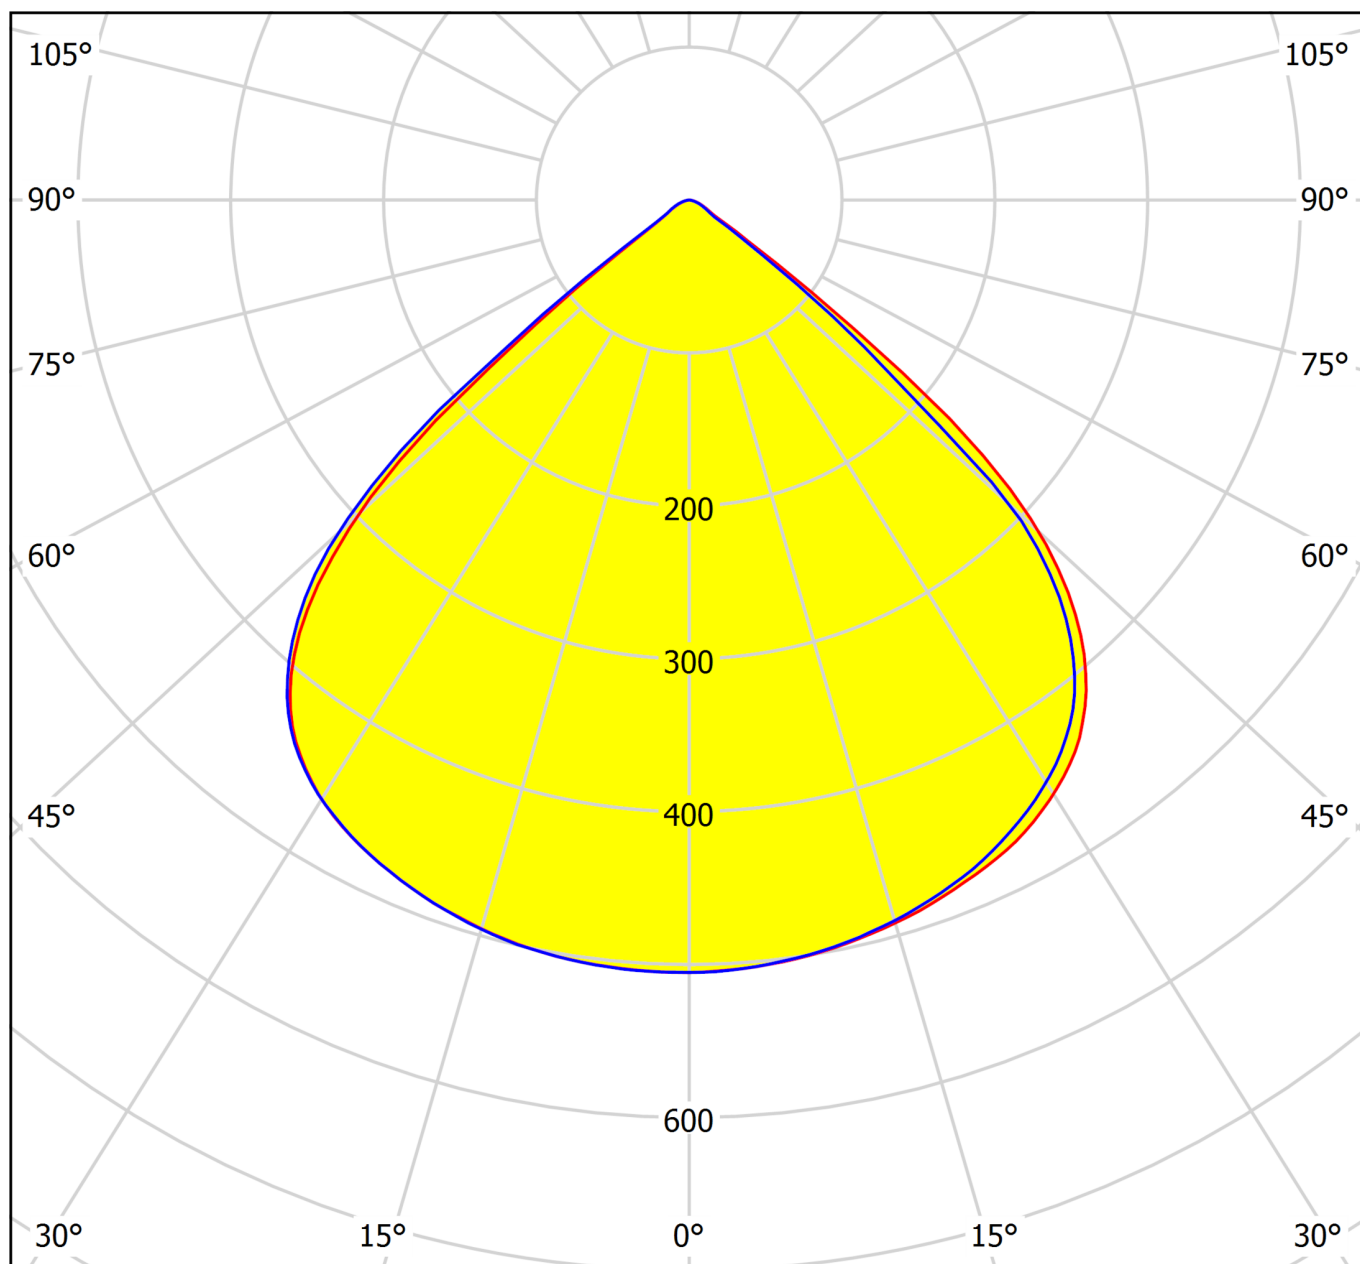


cd/klm

— C0 - C180

— C90 - C270

$\eta = 100\%$

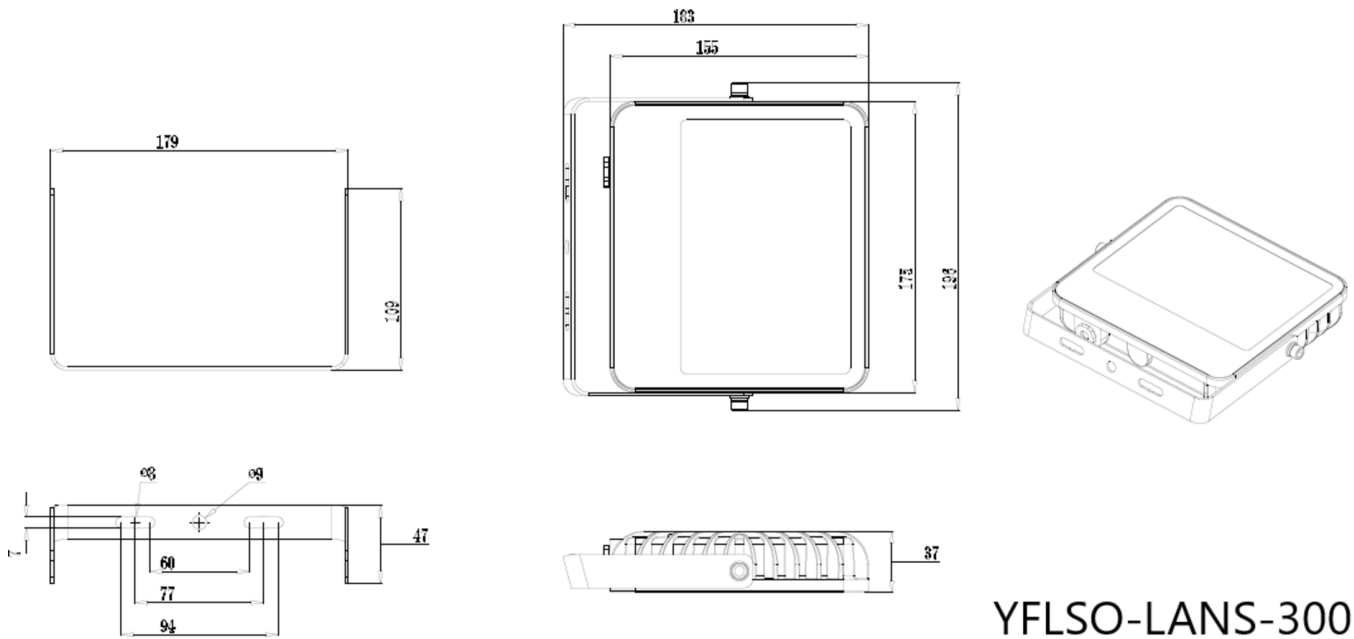

YFLSO-LANS-3001

As of: 26.06.2025 - Subject to technical changes and errors.