




Art.-Nr: YMOCA-ASD-DA
CASAMBI® ASD Bluetooth control module
DALI, 7mA control voltage, 56,5x35,8x22,3mm,

The CBU-ASD unit is a module that can be directly integrated into a luminaire in order to control it wirelessly. It is designed for halogen drivers of 0–10 V, 1–10 V and LED or even DALI dimmer interfaces. It is possible to configure the control output as a digital DALI dimmer interface on site or as an analogue interface.

The modules are controlled wirelessly using the CASAMBI® app for smartphone and tablet (via Bluetooth 4.0), though it is also possible to control them using light switches.

CASAMBI® CBU-ASD modules also give you the option of controlling a large number of luminaires from anywhere. This is made possible by a secure and wireless mesh network that automatically sets up the units. Set up requires neither repeaters or routers, nor wires or external gateways.

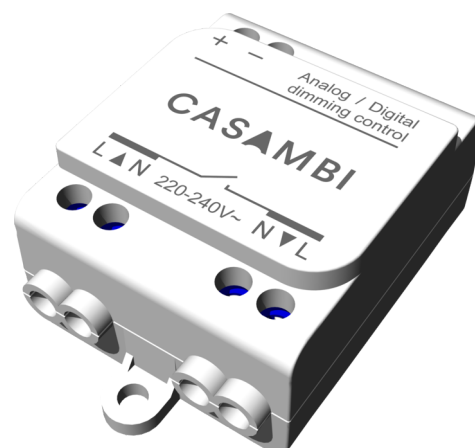

More information

www.rp-group.com/en/item/YMOCA-ASD-DA



TECHNICAL DATA

Dimensions	
Product dimensions Length	56.5 mm
Product dimensions Width	35.8 mm
Product dimensions Height	22.3 mm
Product weight	48 g
Color	
Color	White
Housing material	
Housing material	Polycarbonate
Certification	
Certification	CE
Insulation class	2
Protection type (IP)	IP20
Storage temperature range	
Storage temperature range (Min)	-25 °C



Storage temperature range (Max)	+75 °C
Housing temperature	
Housing temperature (Max)	70 °C
Electrical connection	
Connection cross-section	1.5 mm ²
Type of dimming	0-10V
Input voltage AC	220-240V / 50-60Hz V
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+40 °C
CASAMBI Products	
Communication type	Bluetooth, DALI 1, DALI 2
Max. transmission power	+4 dBm

As of: 09.04.2025 - Subject to technical changes and errors.