




Art.-Nr: YMOCA-QA-SB Single push button for the Casambi system

The simple kinetic push button is an innovative control element, which is operated using kinetic energy. By simply pressing the push button, energy is generated, which is used to wirelessly control lighting or other functions in a Casambi network. This environmentally-friendly and wireless solution offers users a convenient way of regulating their lighting without relying on conventional batteries or cabling. You can use the dual kinetic push button to effortlessly adapt the lighting atmosphere in your room and at the same time make use of sustainable sources of energy.

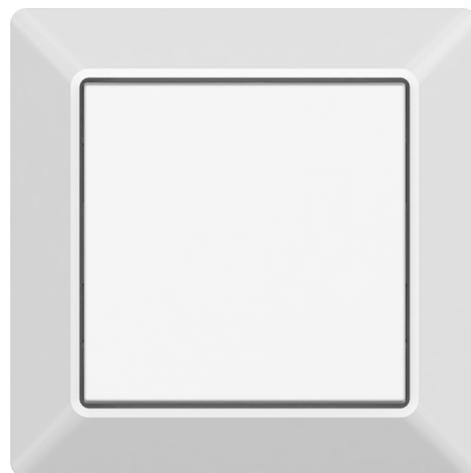

More information
www.rp-group.com/en/item/YMOCA-QA-SB



TECHNICAL DATA

Dimensions	
Product dimensions Length	80.5 mm
Product dimensions Width	80.5 mm
Product dimensions Height	14.7 mm
Packaging dimensions	
Packaging dimensions Length	100 mm
Packaging dimensions Width	110 mm
Packaging dimensions Height	55 mm
Weight incl. packaging	0.12 kg
Color	
Color	White
Storage temperature range	
Storage temperature range (Min)	-25 °C
Storage temperature range (Max)	+65 °C
Temperatures	
Ambient temperature (Min)	-25 °C
Ambient temperature (Max)	+65 °C
CASAMBI Products	



Communication type	CASAMBI
Frequency band	2,403 - 2,479 GHz
Max. transmission power	+ 4 dBm
Certifications	CE, RoHS
Mounting	
Mounting	Universal

As of: 15.04.2025 - Subject to technical changes and errors.