




**Art.-Nr: YMOCA-ROLLO**  
**Casa Rollo 2in1 roller shutter control + 2-way button, for inductive loads,**

The CASA ROLLO roller shutter control system can be used to control or operate roller shutters, blinds or awnings via a push button or app.

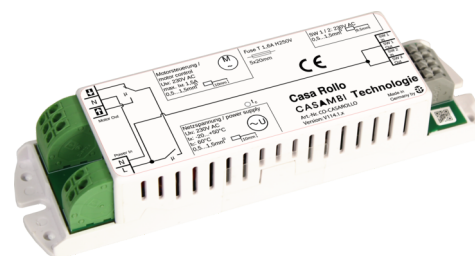

More information  
[www.rp-group.com/en/item/YMOCA-ROLLO](http://www.rp-group.com/en/item/YMOCA-ROLLO)



## TECHNICAL DATA

Dimensions	
Product dimensions Length	143 mm
Product dimensions Width	38 mm
Product dimensions Height	27 mm
Product weight	0.07 kg
Housing material	
Housing material	Polycarbonate
Certification	
Certification	CE, RoHS
Protection type (IP)	IP20
Storage temperature range	
Storage temperature range (Min)	-25 °C
Storage temperature range (Max)	75 °C
Housing temperature	
Housing temperature (Max)	60 °C
Electrical connection	
Connection cross-section	1.5 mm <sup>2</sup>
Switching output	345 VA
Type of dimming	CASAMBI
System performance	345 VA
Input voltage AC	220-240V / 50-60Hz V
Consumption standby	0.15 W
power supply	



Switching cycles	50000 pcs.
Electrical design	with internal control gear
<b>Temperatures</b>	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+50 °C
<b>CASAMBI Products</b>	
Load types	Inductive load
Communication type	Bluetooth
Frequency band	2,403 - 2,479 GHz
Max. transmission power	+4 dBm
<b>CASAMBI Connection</b>	
Connection type	Pushbutton
<b>Mounting</b>	
Mounting	Universal

As of: 10.04.2025 - Subject to technical changes and errors.