




Art.-Nr: YPAED-QER-3801
LED frame panel "EDGE"
ceiling inlay luminaire, square,

LED recessed luminaire, frame panel, EDGE series, for 625 mm ceiling module. Flat shape. Aluminium frame, white, powder-coated. Diffuser made from plastic (PMMA), opal, non-yellowing. Power supply, can be switched or dimmed (DALI/ TRIAC dimmer), external. Version with CASAMBI® Bluetooth control, RGBW and tunable white available.

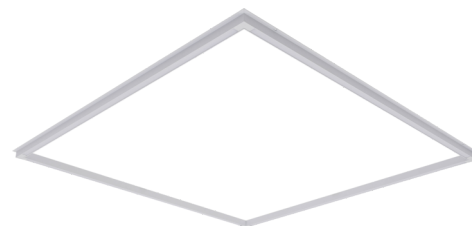

More information

www.rp-group.com/en/item/YPAED-QER-3801



TECHNICAL DATA


| Dimensions | |
|-----------------------------|-----------|
| Product dimensions Length | 615 mm |
| Product dimensions Width | 615 mm |
| Product dimensions Height | 15 mm |
| Product weight | 0.46 kg |
| Packaging dimensions | |
| Packaging dimensions Length | 640 mm |
| Packaging dimensions Width | 635 mm |
| Packaging dimensions Height | 30 mm |
| Weight incl. packaging | 0.56 kg |
| Cutout Dimensions | |
| Hole cut-out length | 0 mm |
| Hole cut-out width | 0 mm |
| Color | |
| Color | White |
| Housing material | |
| Housing material | Aluminium |
| Certification | |
| Certification | CE, RoHS |
| Insulation class | 2 |
| Protection type (IP) | IP20 |



| | |
|------------------------------|----------------------------|
| Protection type (IP) | IP40 |
| Electrical connection | |
| System performance | 40 W |
| Input voltage AC | 220-240V / 50-60Hz V |
| Power factor | 90 PF |
| power supply | |
| Electrical design | with external control gear |
| Light data | |
| Light source | LED |
| Rated luminous flux | 1350 lm |
| Colour rendering index | > 80 Ra |
| Beam angle | 110 ° |
| Color temperature | K |
| Light color | RGBW |
| Service life | 50000 h, L70 |
| Light yield | 36 lm/w |
| Temperatures | |
| Ambient temperature (Min) | -20 °C |
| Ambient temperature (Max) | +40 °C |
| Mounting | |
| Mounting | Ceiling mounting |



TEXT.LICHTVERTEILUNG

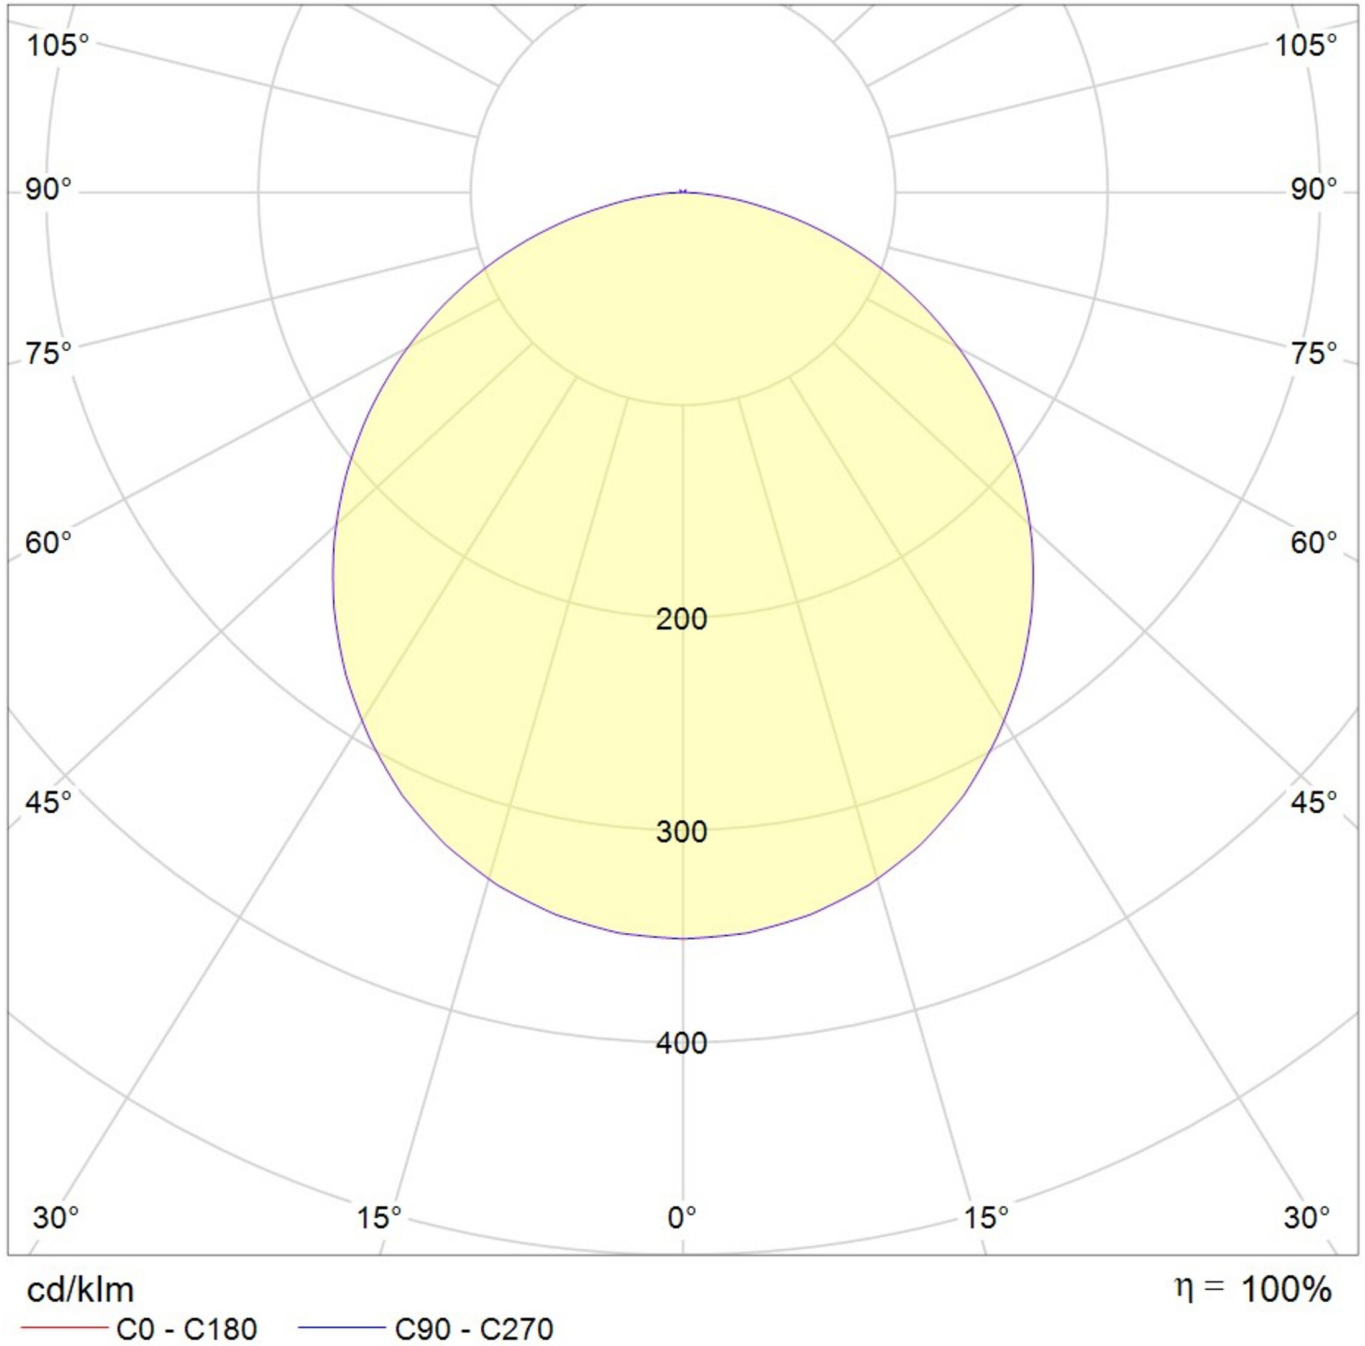

As of: 10.04.2025 - Subject to technical changes and errors.