



Art.-Nr: YPAHA-LANS-5001-D

LED panel "HAWK SPORT" for ceiling surface mounting, ball impact resistant, rectangular, 1496x355x74mm, 50W, 6200lm, 4000K, CRI >80, IP43, switchable

LED surface-mounted luminaire, HAWK Sport series, IP43, for use in sports halls, gyms and other sports facilities. Impact-resistant in accordance with DIN 18032-3. Housing made from steel plate, powder-coated. Diffuser made from PC, UV-resistant. Power supply, can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible. NANO protection on request.



More information

www.rp-group.com/en/item/YPAHA-LANS-5001-D



TECHNICAL DATA


Dimensions	
Product dimensions Length	1496 mm
Product dimensions Width	355 mm
Product dimensions Height	74 mm
Color	
Color	White
Housing material	
Housing material	Steel sheet
Certification	
Certification	CE
Insulation class	1
Protection type (IP)	IP43
Electrical connection	
Connection cross-section	2.5 mm ²
System performance	50 W
Input voltage AC	220-240V / 50-60Hz V
Power factor	0.9 PF
power supply	
Electrical design	with internal control gear, Switchable
Light data	




Light source	LED
Rated luminous flux	6200 lm
Colour rendering index	> 80 Ra
Colour tolerance	3
Beam angle	90 °
Color temperature	4000 K
Light color	840
UGR	21.8
Service life	75000 h, L80
Light yield	90 lm/w
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+40 °C
Mounting	
Mounting	Surface mounting



TEXT.LICHTVERTEILUNG

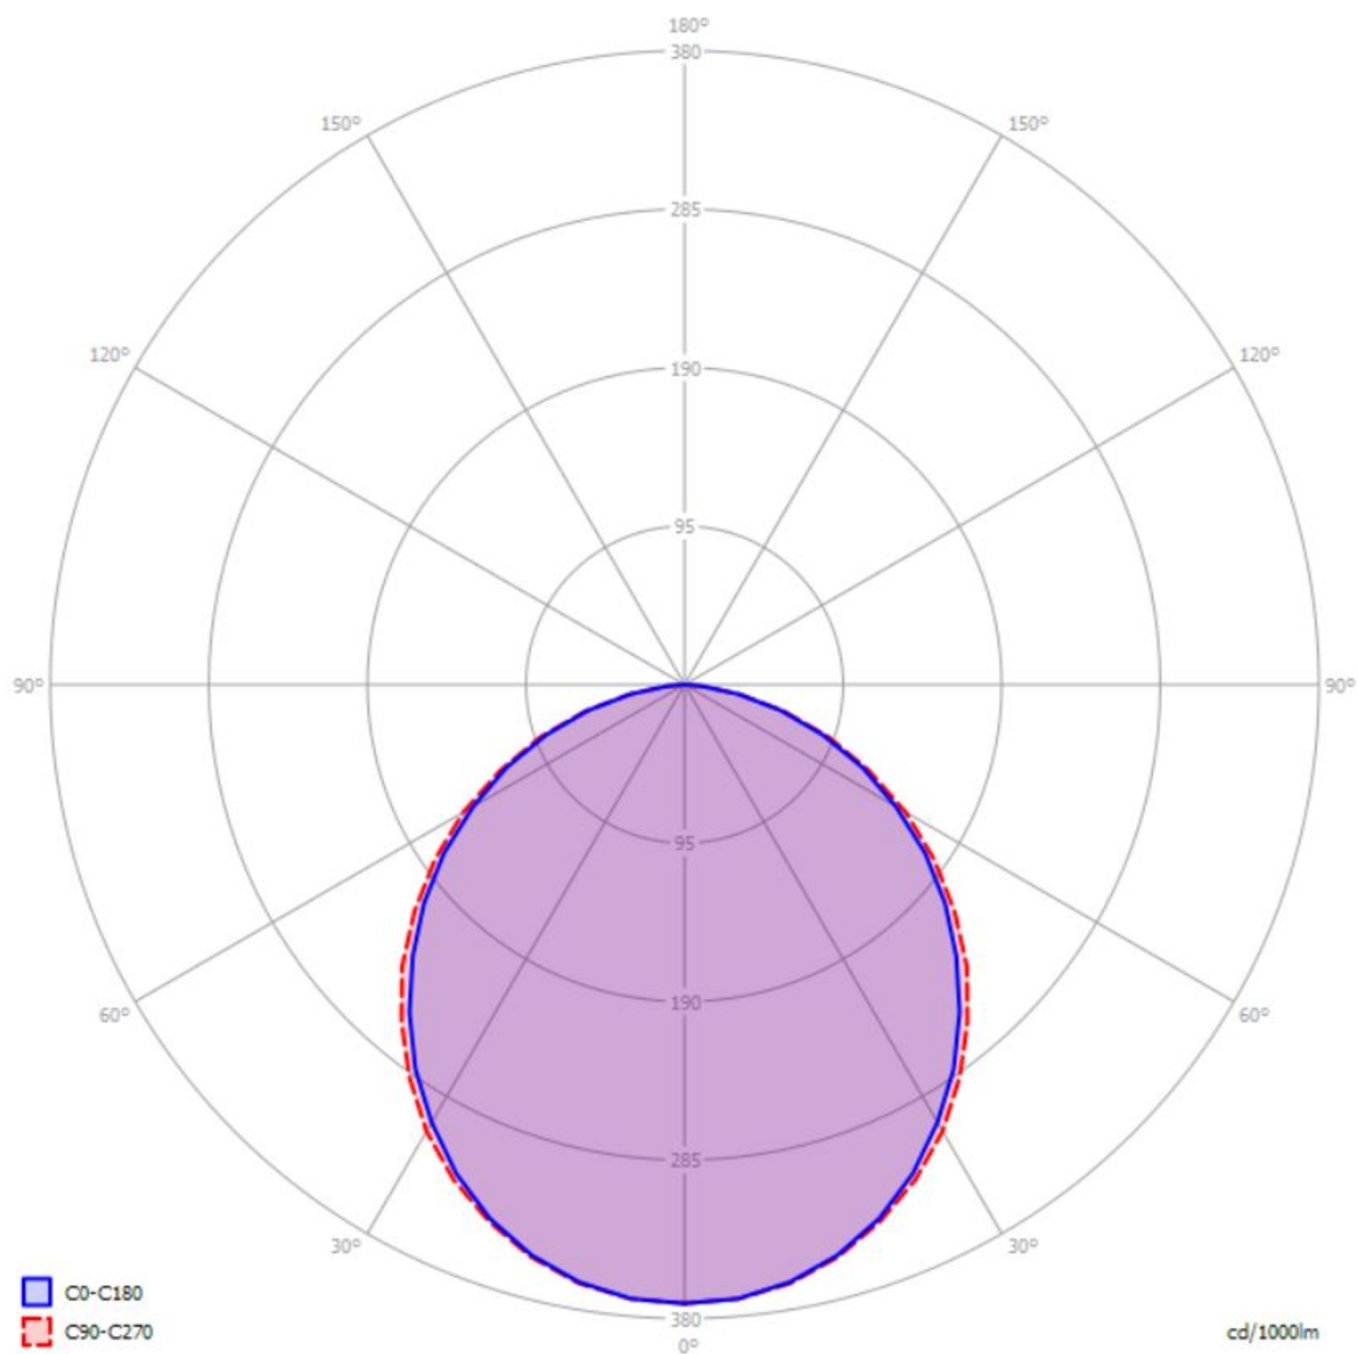

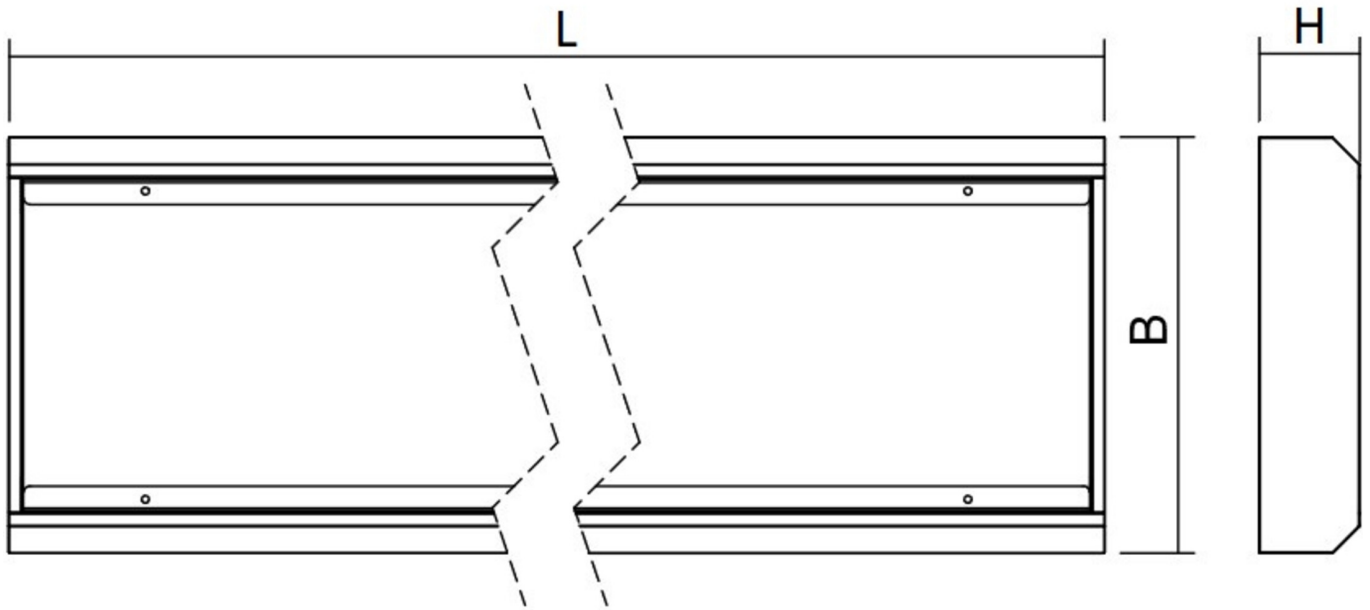

As of: 10.04.2025 - Subject to technical changes and errors.