



Art.-Nr: YPALI-LENS-4201-D
LED panel "LINDO" for ceiling installation, rectangular,
1247x307x100mm, 42W, 4300lm, 4000K, CRI >80, IP65,
white, switchable

LED recessed & surface-mounted luminaire, LINDO series, IP65, for use in places with stringent requirements (hospitals, laboratories, operating theatres, food industry etc.). Housing made from steel plate, powder-coated. Diffuser made from PMMA, UV-resistant. Power supply, can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible. NANO protection on request.



More information

www.rp-group.com/en/item/YPALI-LENS-4201-D



TECHNICAL DATA


Dimensions	
Product dimensions Length	1247 mm
Product dimensions Width	307 mm
Product dimensions Height	100 mm
Product weight	10 kg
Packaging dimensions	
Packaging dimensions Length	1290 mm
Packaging dimensions Width	330 mm
Packaging dimensions Height	109 mm
Cutout Dimensions	
Installation depth	200 mm
Color	
Color	White
Housing material	
Housing material	Steel sheet
Certification	
Certification	CE
Insulation class	1
Protection type (IP)	IP65
Electrical connection	




Connection cross-section	2.5 mm ²
System performance	42 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	35 A
Power factor	0.9 PF
Starting time	2440 µs
power supply	
Number of power supply units at LS C16A	26 pcs.
Electrical design	with internal control gear, Switchable
Light data	
Light source	LED
Rated luminous flux	4300 lm
Colour rendering index	> 80 Ra
Beam angle	60 °
Color temperature	4000 K
Light color	840
UGR	21.6
Service life	70000 h, L80
Light yield	102 lm/w
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+25 °C
Mounting	
Mounting	Ceiling mounting



TEXT.LICHTVERTEILUNG

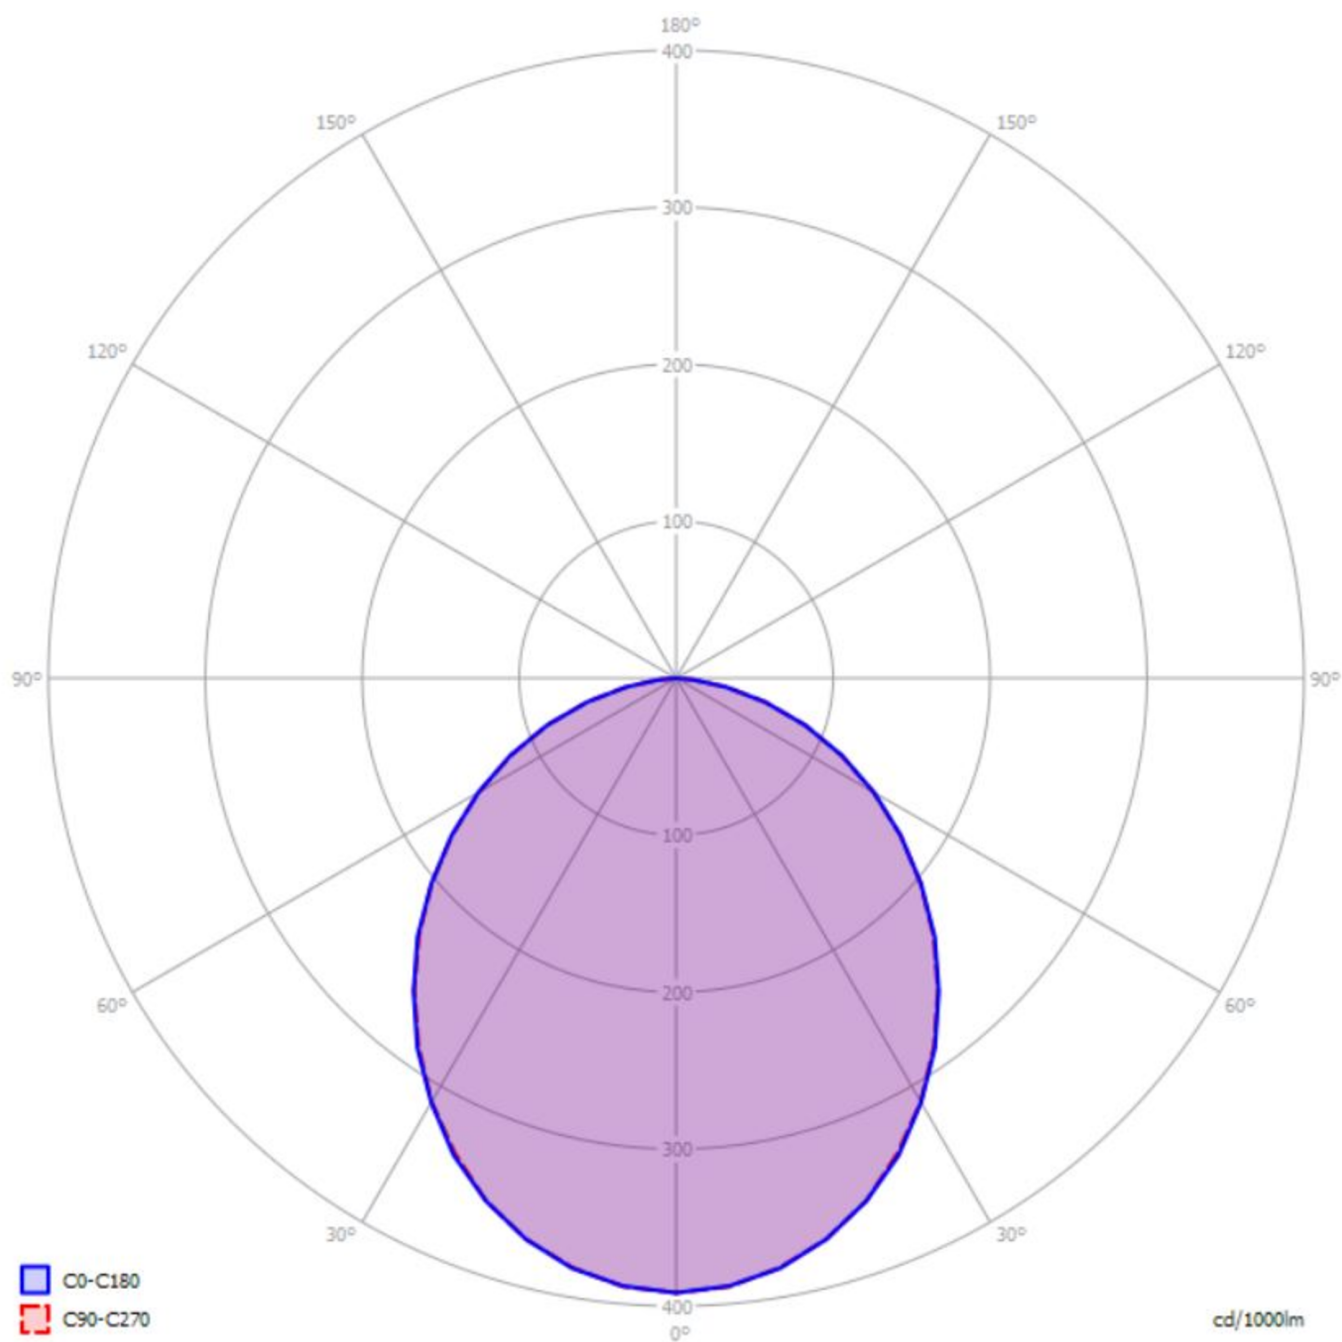

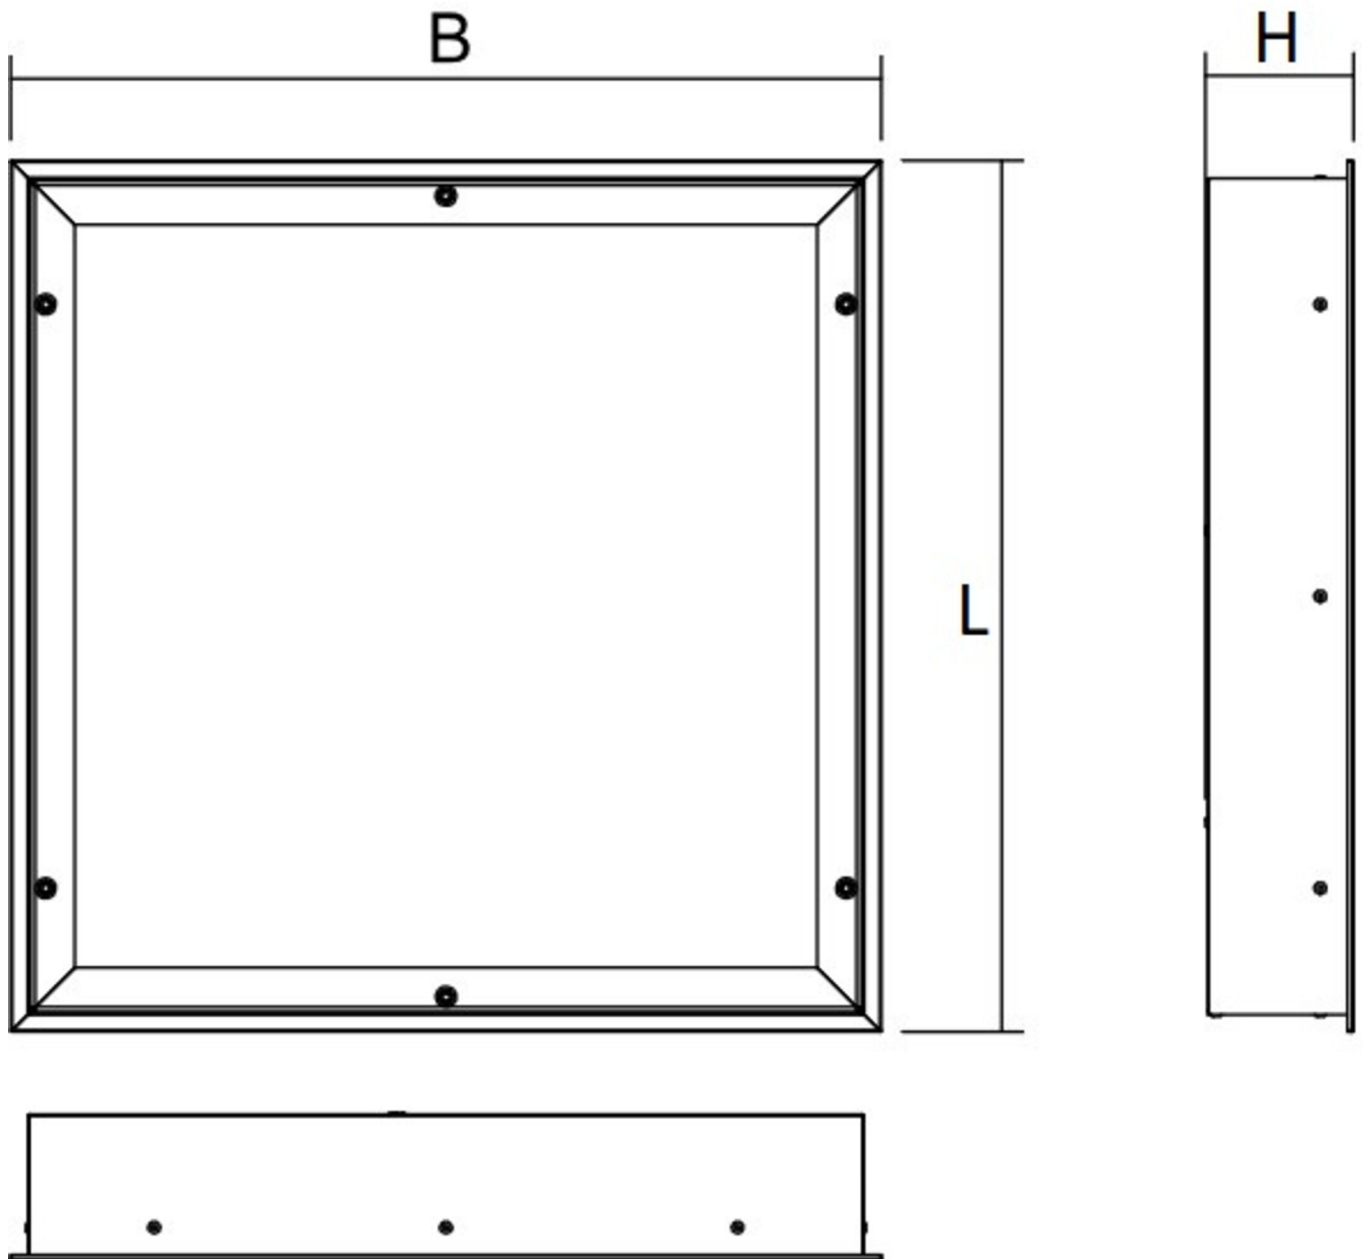

As of: 10.04.2025 - Subject to technical changes and errors.