



Art.-Nr: YTUVA-LAND-3801-D
LED moisture-proof luminaire "VASCA"
wall / ceiling construction, 1220x97x82mm,



LED diffuser luminaire, VASCA series, IP65, IK08. Housing made from polycarbonate. Prismatic diffuser made from PC, UV-resistant. Diffuser is fastened with stainless steel clips. LED boards can be interchanged individually. Operating unit can be switched or dimmed (DALI dimmer), installed. Feed-through wiring present. Version with Casambi Bluetooth control available. DC compatible.



More information

www.rp-group.com/en/item/YTUVA-LAND-3801-D



TECHNICAL DATA


Dimensions	
Product dimensions Length	1220 mm
Product dimensions Width	97 mm
Product dimensions Height	82 mm
Product weight	1.8 kg
Packaging dimensions	
Packaging dimensions Length	1240 mm
Packaging dimensions Width	104 mm
Packaging dimensions Height	87 mm
Weight incl. packaging	2.2 kg
Housing material	
Housing material	Polycarbonate
Certification	
Certification	CE, RoHS, EMC
Insulation class	1
Protection type (IP)	IP65
Shock resistance level (IK)	8
Glow wire test	850 °C
Electrical connection	
Connection cross-section	1.5 mm ²
Type of dimming	DALI




System performance	36 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	25 A
Power factor	0.95 PF
power supply	
Number of power supply units on LS B10A	19 pcs.
Number of power supply units on LS B16A	30 pcs.
Number of power supply units at LS C10A	pcs.
Number of power supply units at LS C16A	pcs.
DC suitability	Yes
Electrical design	Dimmable, with internal control gear
Light data	
Light source	LED
Rated luminous flux	4500 lm
Colour rendering index	> 80 Ra
Colour tolerance	2
Beam angle	120 °
Color temperature	4000 K
Light color	8400
UGR	24
Service life	50000 h, L80
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	40 °C
Mounting	
Mounting	Universal
CASAMBI Products	
Communication type	DALI 1



TEXT.LICHTVERTEILUNG

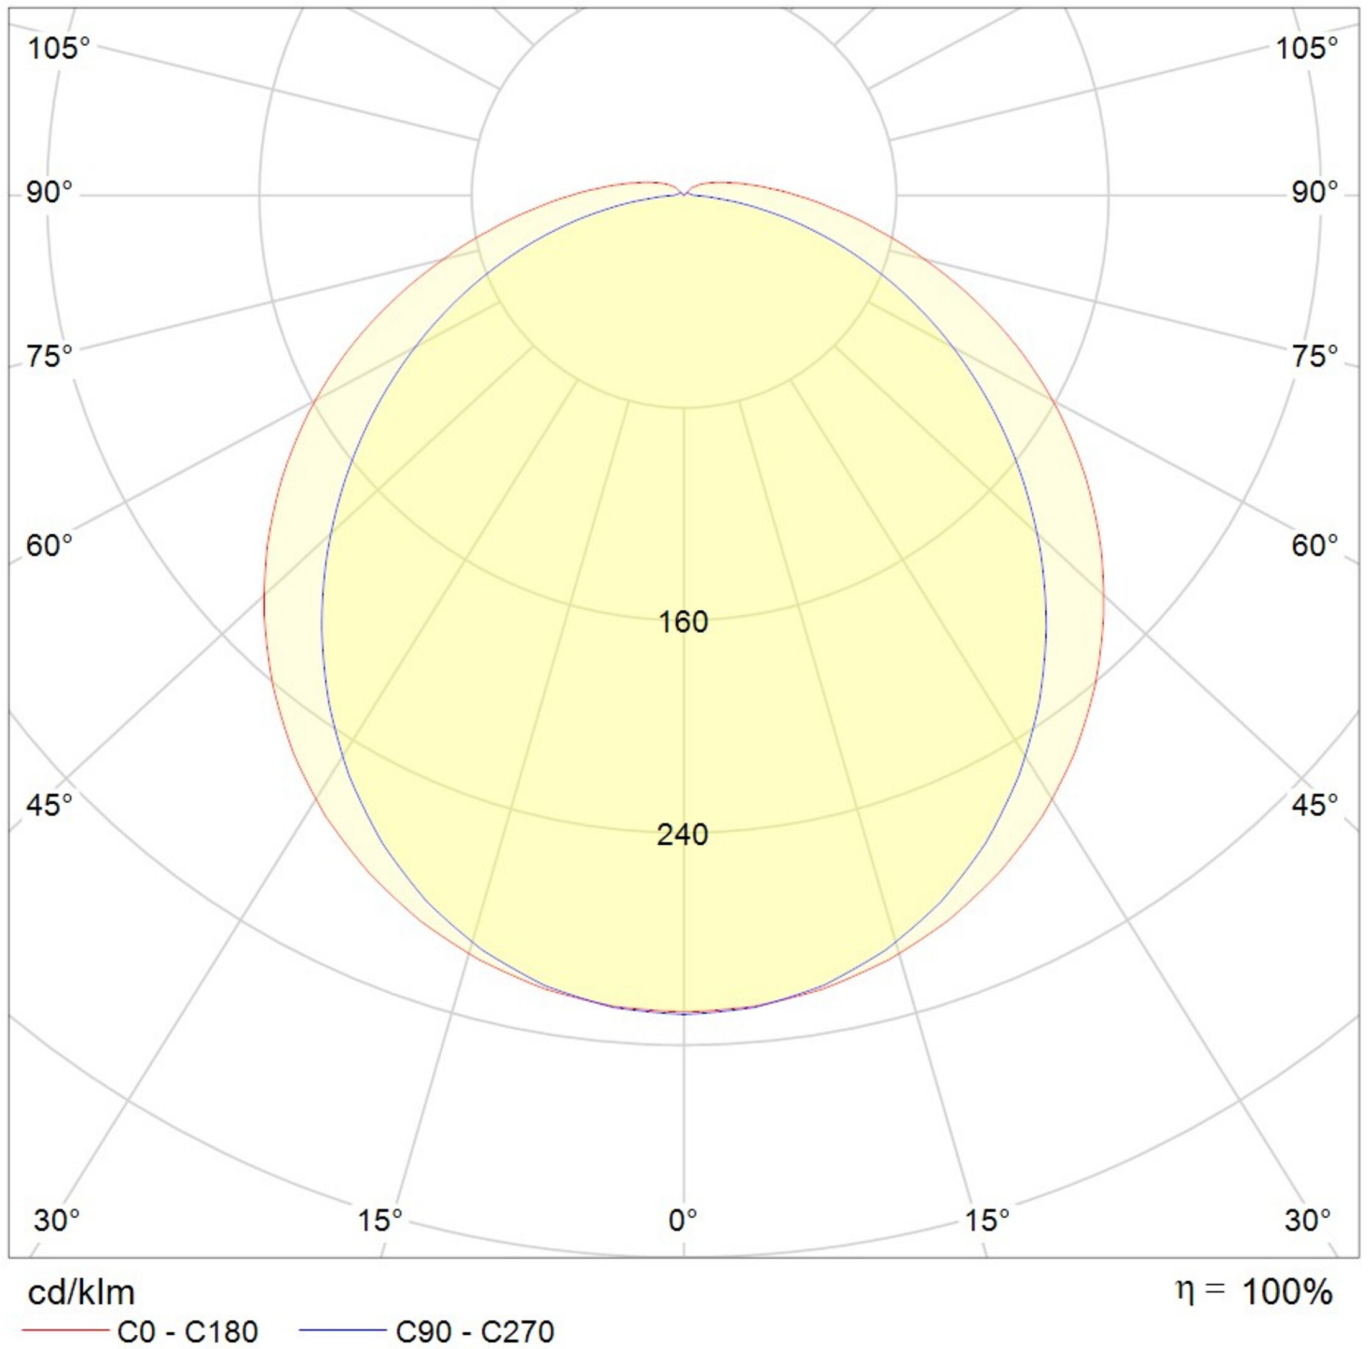

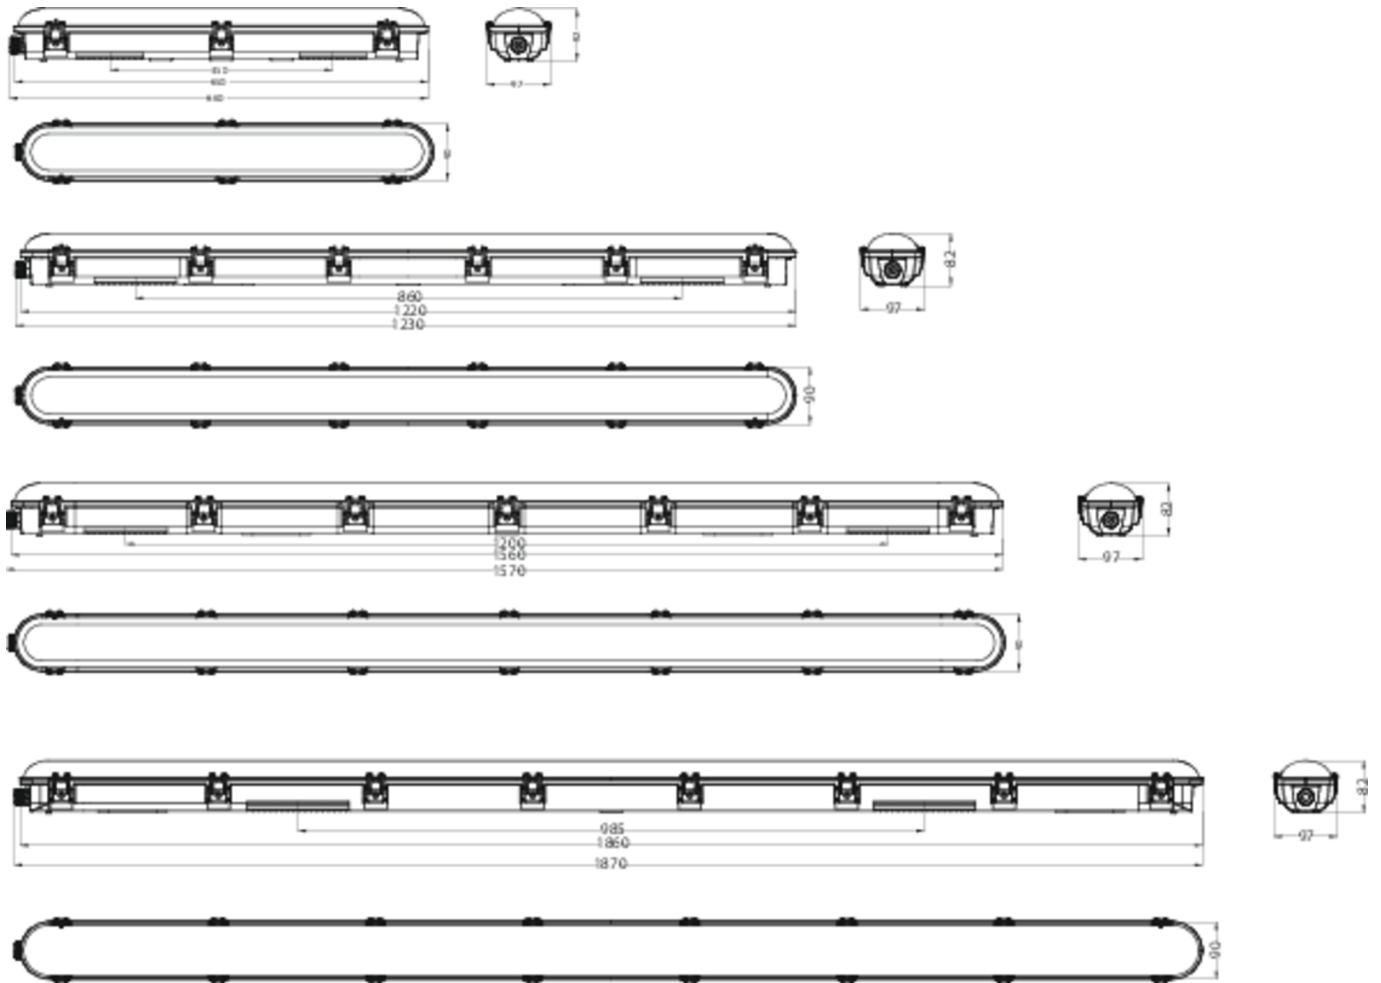

As of: 14.05.2025 - Subject to technical changes and errors.