



**Art.-Nr: YTUVA-LANS-5601-D**  
**LED moisture-proof luminaire "VASCA"**  
**wall / ceiling construction, 1560x97x82mm,**



LED diffuser luminaire, VASCA series, IP65, IK08. Housing made from polycarbonate. Prismatic diffuser made from PC, UV-resistant. Diffuser is fastened with stainless steel clips. LED boards can be interchanged individually. Operating unit can be switched or dimmed (DALI dimmer), installed. Feed-through wiring present. Version with Casambi Bluetooth control available. DC compatible.



More information

[www.rp-group.com/en/item/YTUVA-LANS-5601-D](http://www.rp-group.com/en/item/YTUVA-LANS-5601-D)



## TECHNICAL DATA


Dimensions	
Product dimensions Length	1560 mm
Product dimensions Width	97 mm
Product dimensions Height	82 mm
Product weight	2.2 kg
Packaging dimensions	
Packaging dimensions Length	1585 mm
Packaging dimensions Width	100 mm
Packaging dimensions Height	90 mm
Weight incl. packaging	2.3 kg
Housing material	
Housing material	Polycarbonate
Certification	
Certification	CE, RoHS, EMC
Insulation class	1
Protection type (IP)	IP65
Shock resistance level (IK)	8
Glow wire test	850 °C
Electrical connection	
Connection cross-section	1.5 mm <sup>2</sup>
System performance	54 W



Input voltage AC	220-240V / 50-60Hz V
Starting current	30 A
Power factor	0.95 PF
<b>power supply</b>	
Number of power supply units on LS B10A	9 pcs.
Number of power supply units on LS B16A	16 pcs.
Number of power supply units at LS C10A	15 pcs.
Number of power supply units at LS C16A	27 pcs.
DC suitability	Yes
Electrical design	with internal control gear, Switchable
<b>Light data</b>	
Light source	LED
Rated luminous flux	6800 lm
Colour rendering index	> 80 Ra
Colour tolerance	2
Beam angle	120 °
Color temperature	4000 K
Light color	840
UGR	24
Service life	50000 h, L80
<b>Temperatures</b>	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	40 °C
<b>Mounting</b>	
Mounting	Universal



TEXT.LICHTVERTEILUNG

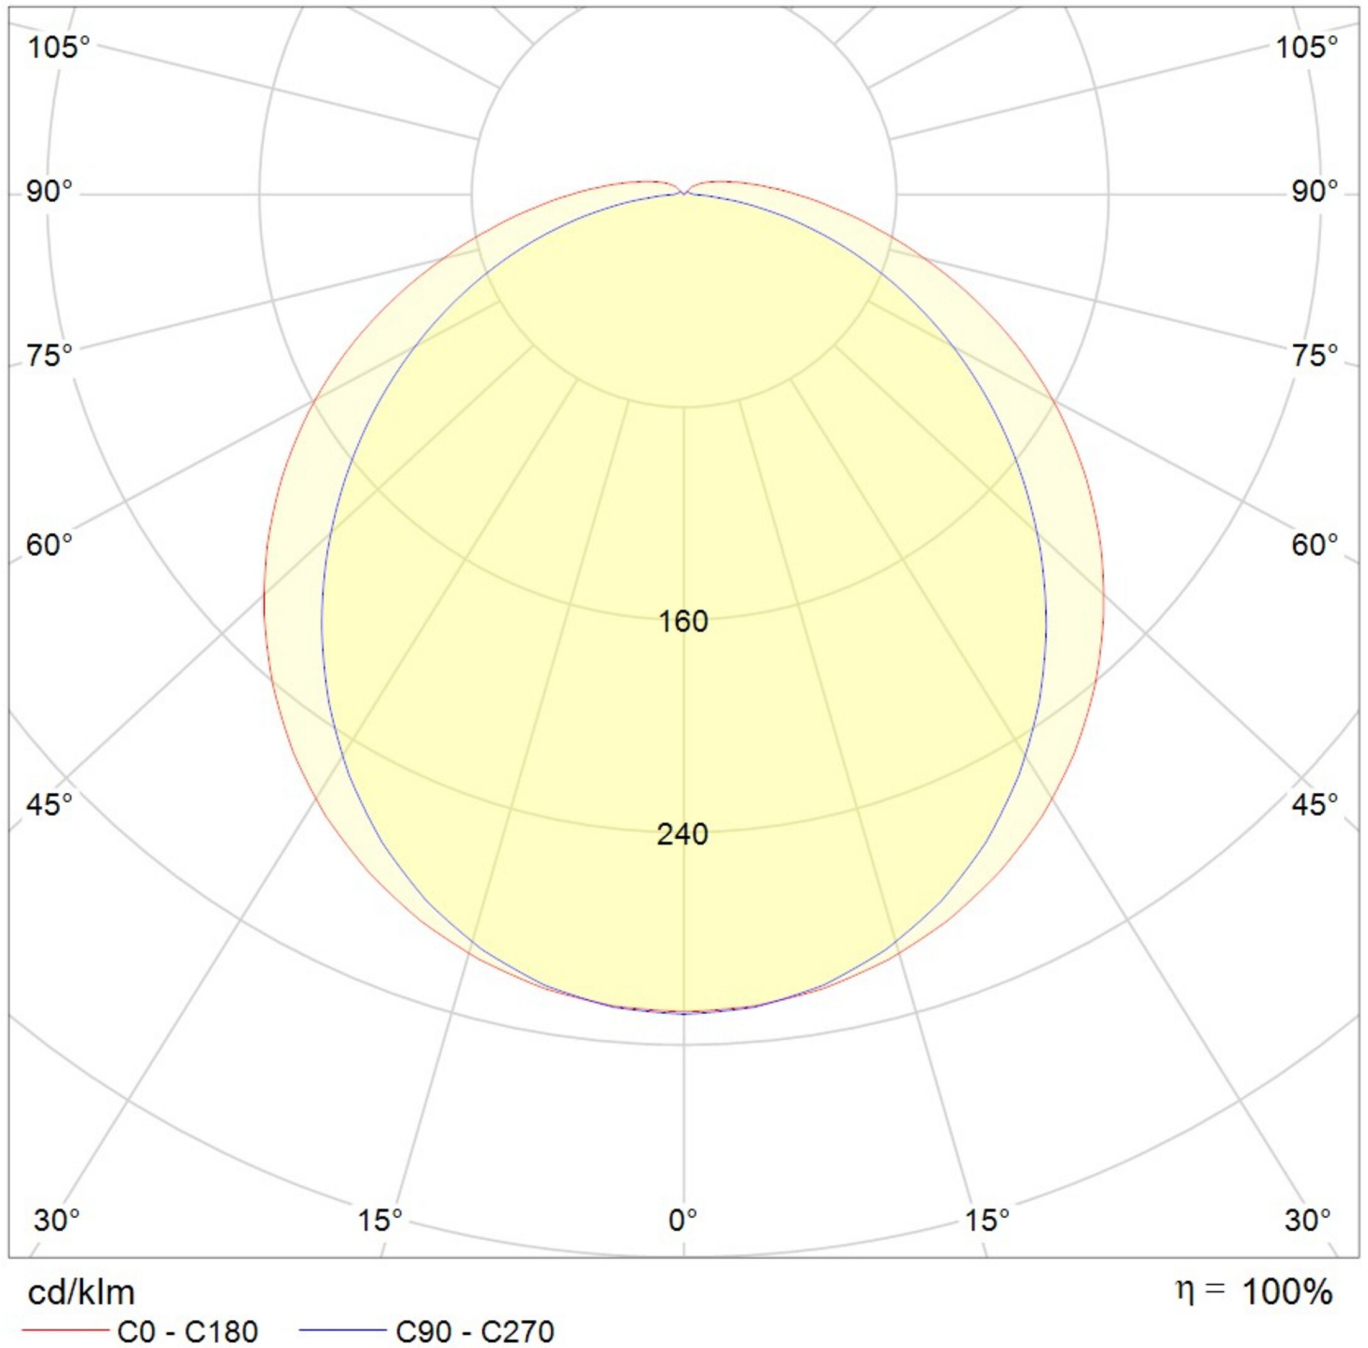

As of: 15.05.2025 - Subject to technical changes and errors.