



**Art.-Nr: YWDHU-RPNS-1701-D**

**LED pendant luminaire "HUGO", ceiling surface mounting, round, 400x87mm, 17W, 2000lm, 4000K, CRI >80, IP40, white, switchable**

**Professional, switchable LED ceiling light with robust aluminium housing for uniform and UV-stable basic lighting in commercial and residential spaces.**

LED ceiling- and wall-mounted luminaire, HUGO series, as the basic lighting for rooms in a commercial environment and at home. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI Bluetooth control available. DC compatible.



More information

[www.rp-group.com/en/item/YWDHU-RPNS-1701-D](http://www.rp-group.com/en/item/YWDHU-RPNS-1701-D)



## TECHNICAL DATA


Dimensions	
Diameter	400 mm
Product dimensions Height	87 mm
Product weight	4 kg
Packaging dimensions	
Packaging dimensions Length	505 mm
Packaging dimensions Width	405 mm
Packaging dimensions Height	100 mm
Weight incl. packaging	4.2 kg
Color	
Color	White
Housing material	
Housing material	Aluminium
Certification	
Certification	CE, ENEC
Insulation class	1
Protection type (IP)	IP40
Glow wire test	650 °C




Electrical connection	
Connection cross-section	1.5 mm <sup>2</sup>
System performance	17 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	23 A
Power factor	0.97 PF
Starting time	140 µs
power supply	
Number of power supply units on LS B10A	23 pcs.
Number of power supply units on LS B16A	38 pcs.
Number of power supply units at LS C10A	39 pcs.
Number of power supply units at LS C16A	64 pcs.
DC suitability	Yes
Electrical design	with internal control gear, Switchable
Light data	
Light source	LED
Rated luminous flux	2000 lm
Colour rendering index	> 80 Ra
Colour tolerance	3
Beam angle	105,6/106 °
Color temperature	4000 K
Light color	840
UGR	22,1
Service life	50000 h, L80
Light yield	118 lm/w
Temperatures	
Ambient temperature (Min)	0 °C
Ambient temperature (Max)	+25 °C
Mounting	
Mounting	Pendulum ceiling construction



TEXT.LICHTVERTEILUNG

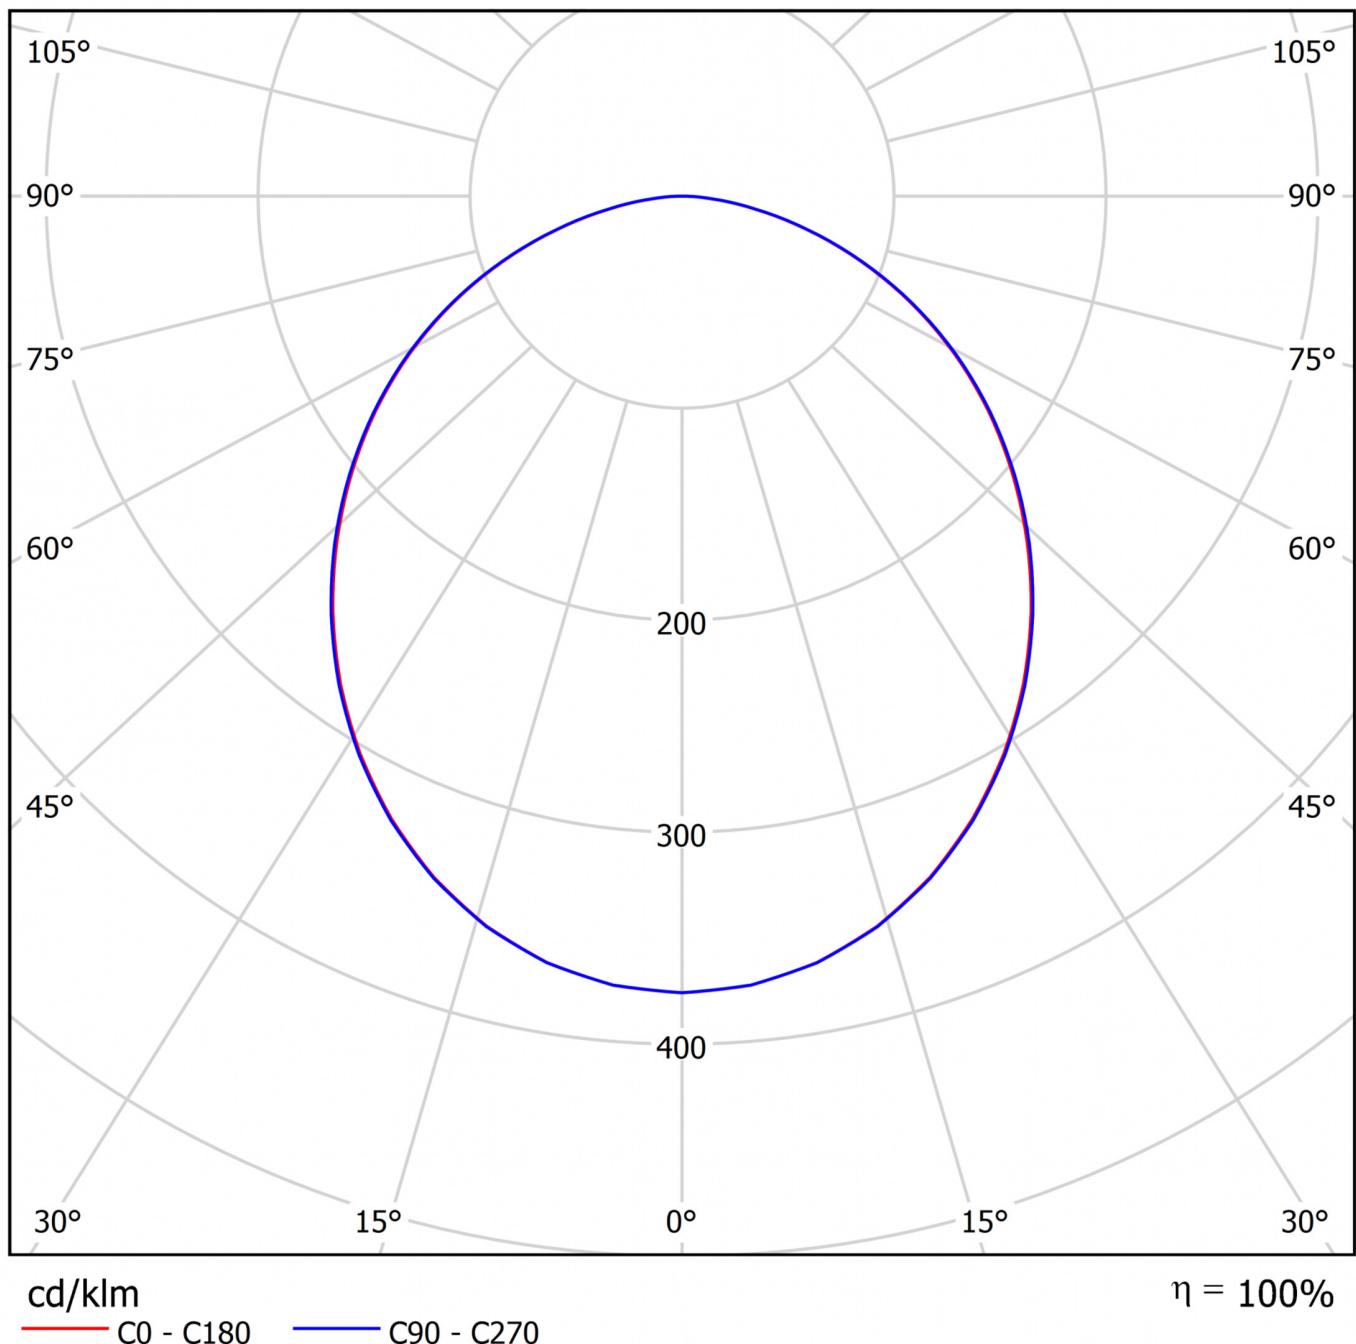

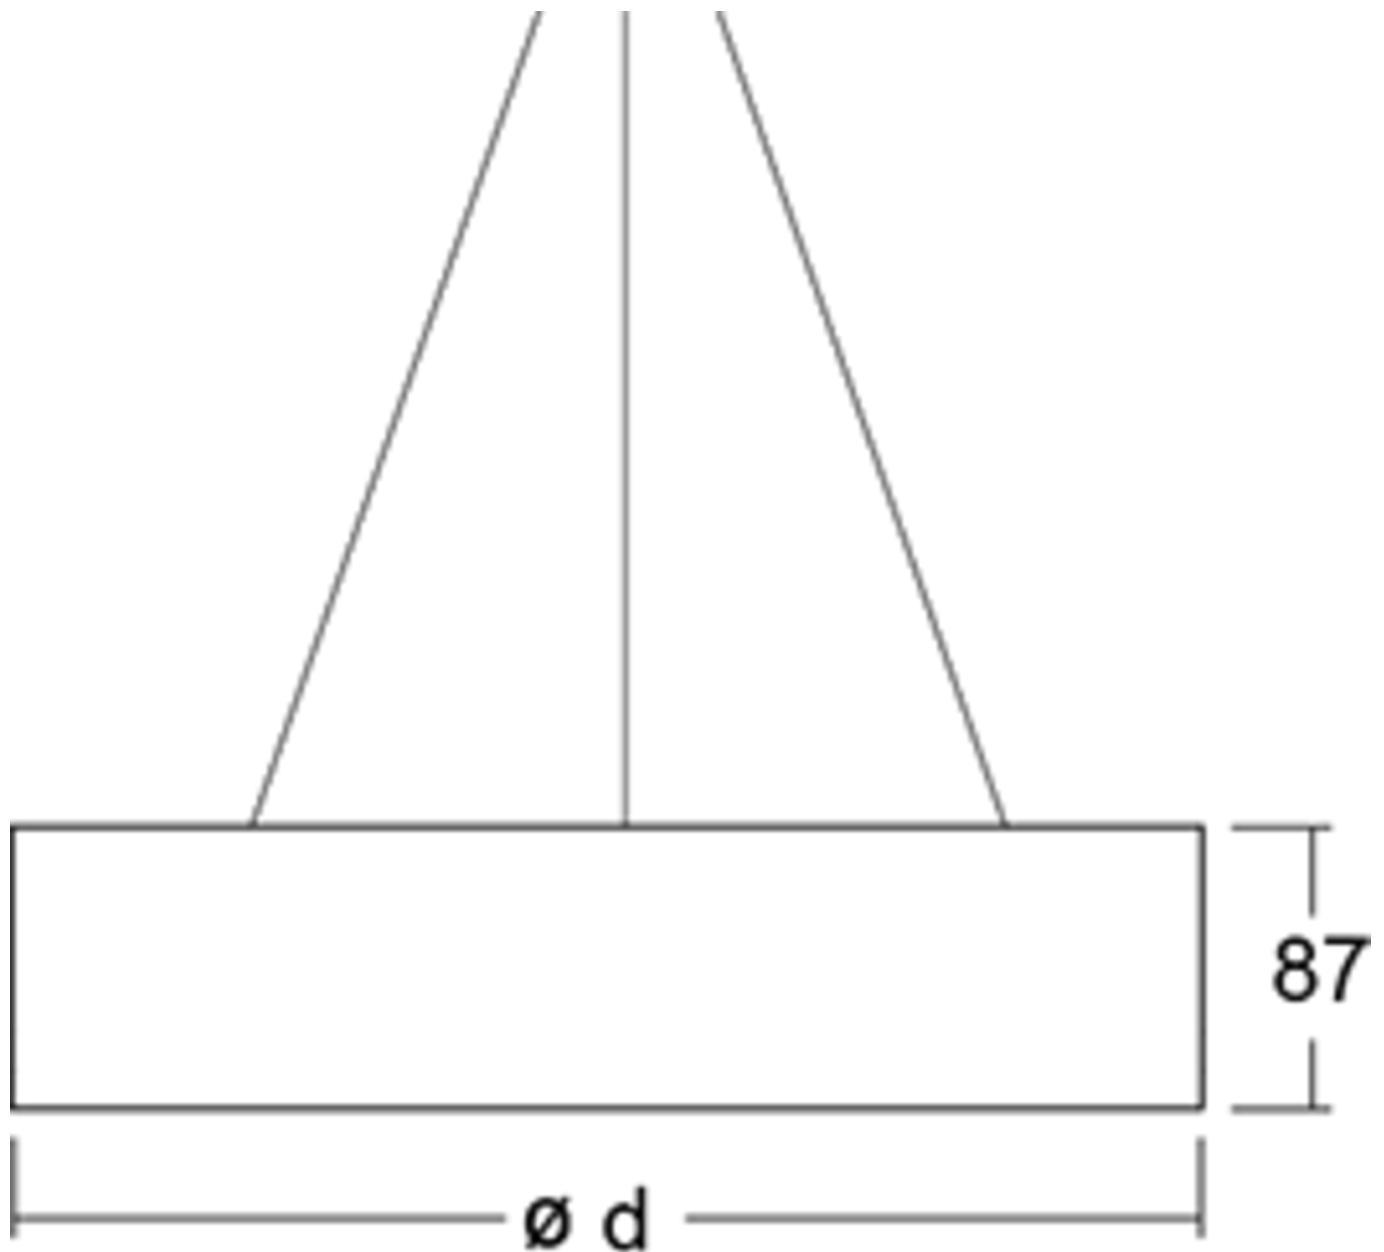

As of: 14.01.2026 - Subject to technical changes and errors.