




**Art.-No.: YWDLA-LPNS-6701-UI**  
**LED pendant luminaire "LARO", c- surface mounting,**  
**direct / indirect distribution, 1403x93x80mm, 67W,**  
**7500lm, 4000K, CRI >80, IP40, UGR <19, switchable**

LED-Decken- und Wandleuchte, Serie LARO, direkt und direkt/indirekt strahlend. Gehäuse aus Aluminium, weiß, pulverbeschichtet. Diffusor Kunststoff (PMMA) mikroprismatisch, UV-stabilisiert. Betriebsgerät schaltbar oder DALI dimmbar, integriert. UGR < 19 und Bildschirmgerecht gemäß EN 12464-1. Ausführung mit Casambi Bluetooth Steuerung verfügbar.

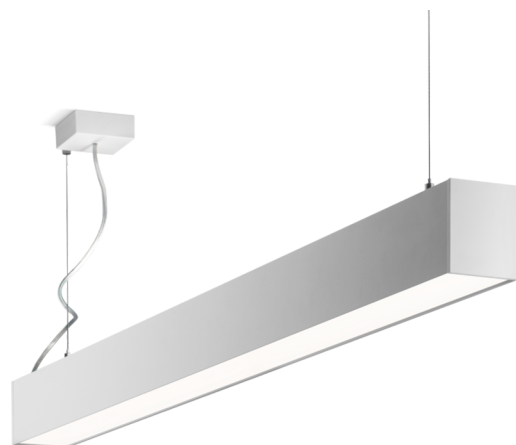

## DANE TECHNICZNE


Electrical data	
Input Voltage AC	AC 220-240V / 50-60Hz
Power Factor	0,95
System power	67 W
Inrush current	45 A
Inrush current duration	100 µs
Luminaires on B10A fuse	18 Stk.
Luminaires on B16A fuse	30 Stk.
Luminaires on C10A fuse	30 Stk.
Luminaires on C16A fuse	50 Stk.
Connection cross section	1,5 mm <sup>2</sup>
Electrical version	with internal operating device, switchable
CASAMBI Ready	Yes



Photometrical data	
Light source	LED
Colour temperature	4 000 K
Rated luminous flux	7 500 lm
Luminous efficacy	112 lm/W
Light colour	840
Colour rendering index (CRI)	> 80
Colour tolerance	2
Beam angle	68/66 °
UGR	15,5
Lifetime (h, at 25°C)	50 000 h, L80
Acceptance tests	
Certifications	CE
Protection class	I
Ingress protection (IP) rating	IP 40
Glow wire test	650° C
Ambient temperature	0 to +25 C°
Physical data	
Mounting method	pendant fitting
Housing material	Aluminium
Housing colour	white
Cover material	PMMA
Length (L)	1 403 mm
Width (B)	93 mm
Height (H)	80 mm
Product weight	6,3 kg
Weight incl. Packaging	6,5 kg
Packaging Length (L)	1 600 mm
Packaging Width (B)	150 mm
Packaging Height (H)	150 mm



**LIGHT DISTRIBUTION**

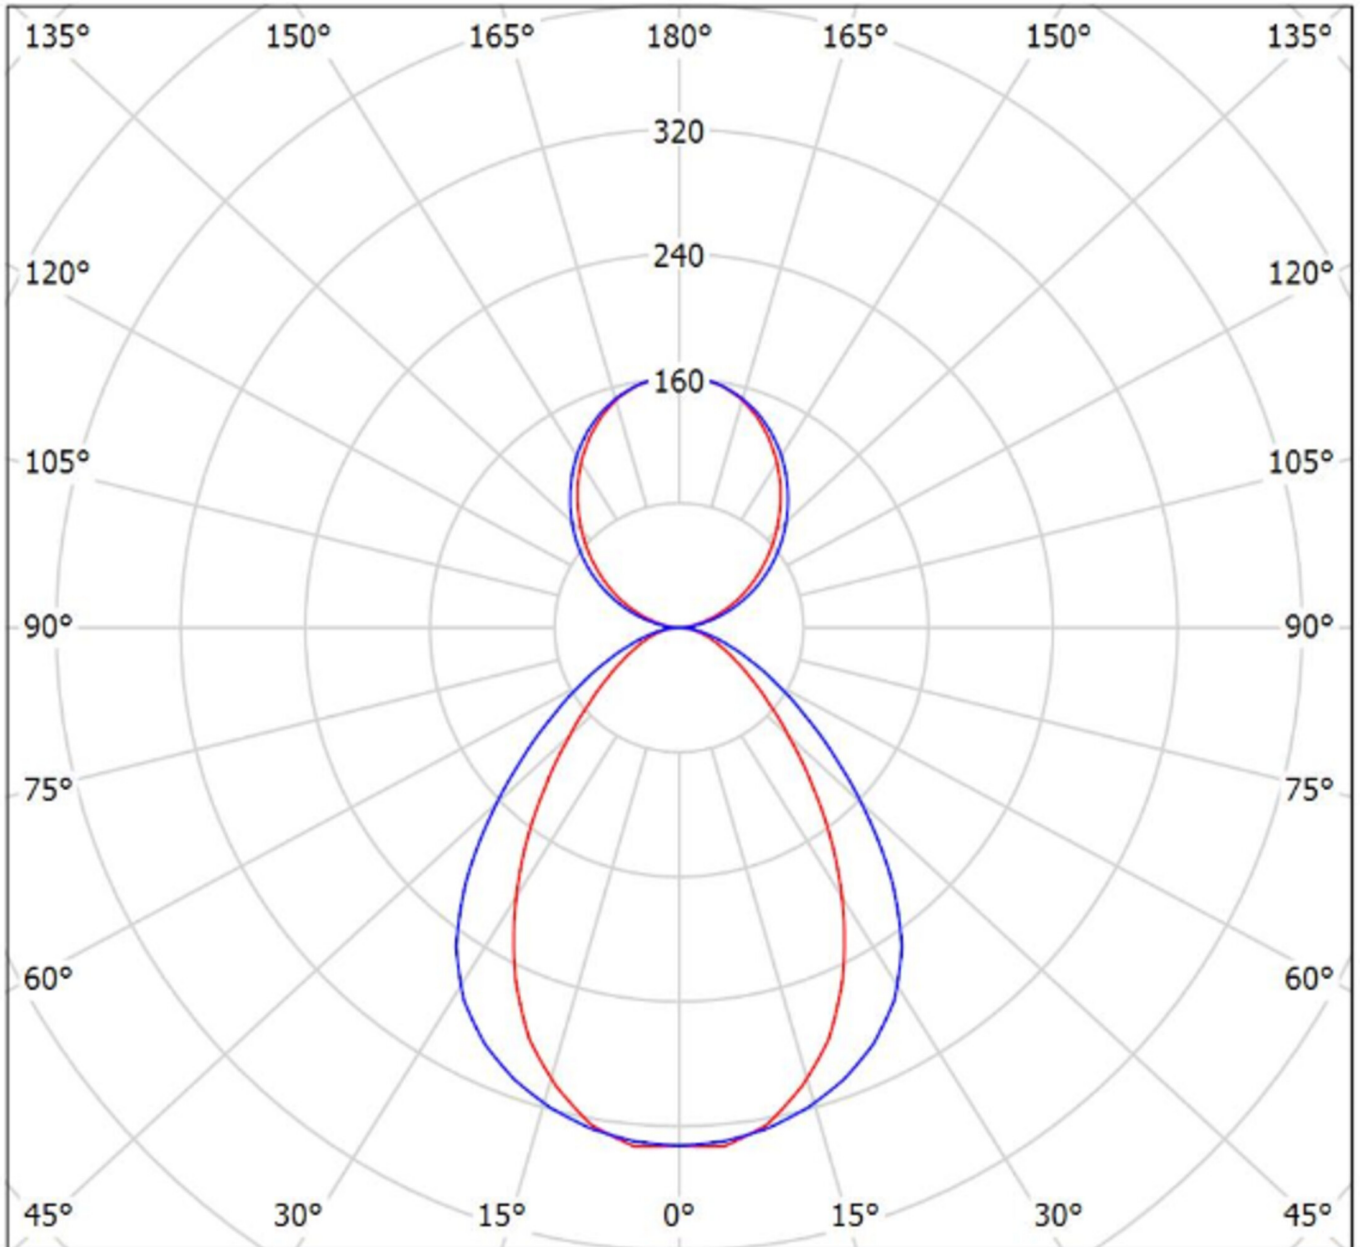

cd/klm  
— C0 - C180 — C90 - C270

$\eta = 100\%$