




**Art.-Nr: YWDMA-LAWS-4401-D**

**LED luminaire "MAVS", ceiling surface mounting, rectangular, 1415x59x79mm, 44W, 4350lm, 3000K, CRI >80, IP40, white, switchable**

**Professional LED surface-mounted luminaire (1415 x 59 x 79 mm) for ceilings and walls – switchable, DC-compatible and UV-stabilised.**

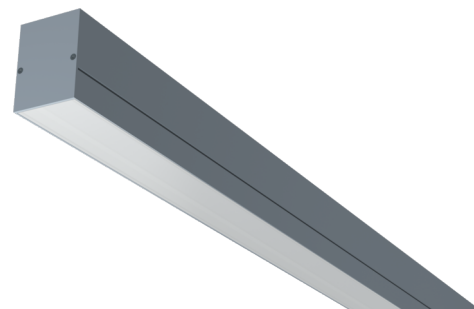

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with

CASAMBI® Bluetooth control available. DC compatible.



More information

[www.rp-group.com/en/item/YWDMA-LAWS-4401-D](http://www.rp-group.com/en/item/YWDMA-LAWS-4401-D)



## TECHNICAL DATA



Dimensions	
Product dimensions Length	1415 mm
Product dimensions Width	59 mm
Product dimensions Height	79 mm
Product weight	3.2 kg
Packaging dimensions	
Packaging dimensions Length	1600 mm
Packaging dimensions Width	119 mm
Packaging dimensions Height	74 mm
Weight incl. packaging	3.5 kg
Color	
Color	Anodised aluminium
Housing material	
Housing material	Aluminium
Certification	
Certification	CE
Insulation class	1
Protection type (IP)	IP40



Electrical connection	
Connection cross-section	2.5 mm <sup>2</sup>
System performance	44 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	35 A
Power factor	0.9 PF
Starting time	240 µs
power supply	
Number of power supply units at LS C16A	26 pcs.
DC suitability	Yes
Electrical design	with internal control gear, Switchable
Light data	
Light source	LED
Rated luminous flux	4350 lm
Colour rendering index	> 80 Ra
Colour tolerance	3
Beam angle	60 °
Color temperature	3000 K
Light color	830
UGR	26.2
Service life	75000 h, L80
Light yield	99 lm/w
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+30 °C
Mounting	
Mounting	Surface mounting



TEXT.LICHTVERTEILUNG

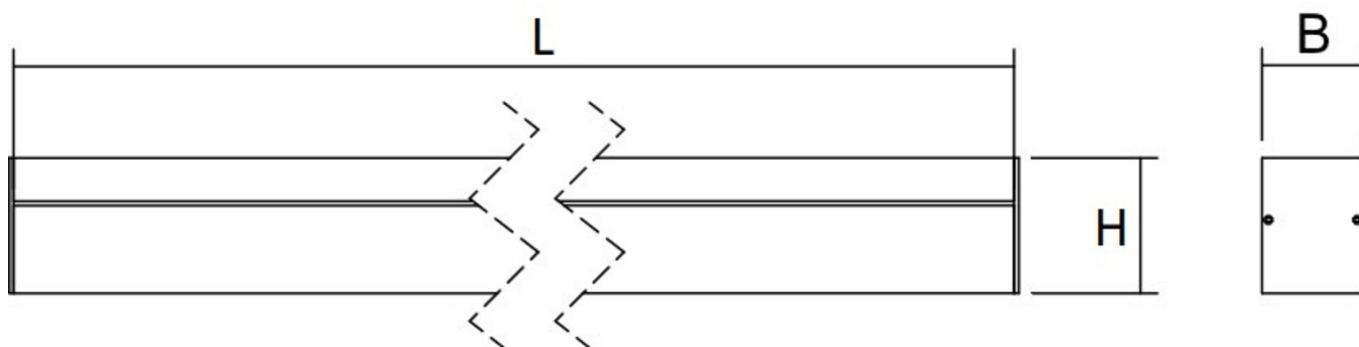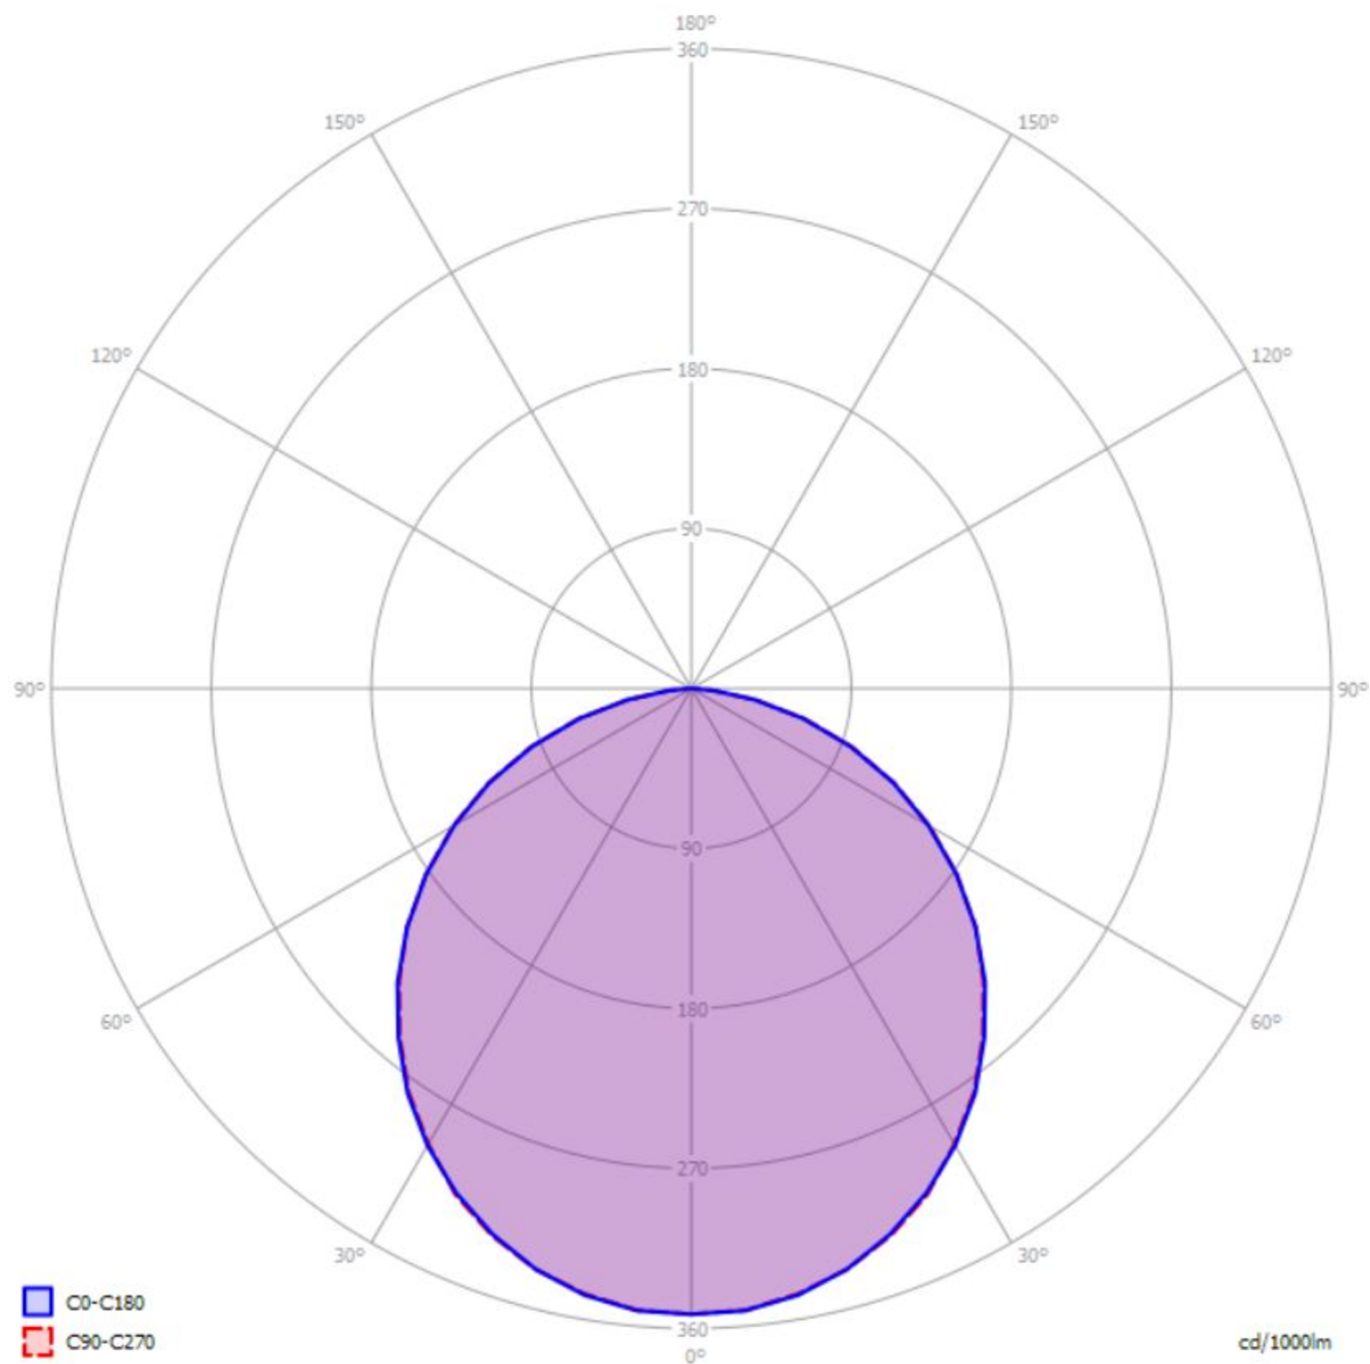



## ACCESSORY LIST

YWDMA-PENDEL - Pendant set for MAVS incl. transparent cable 3 x 1.5 mm<sup>2</sup>

YWDMA-MONKL-A - Mounting clamp for MAVS, surface mounting / 1 pc.