




**Art.-No.: YWDMA-LAWS-6101-D**  
**LED luminaire "MAVS", ceiling surface mounting,**  
**rectangular, 1975x59x79mm, 61W, 6100lm, 4000K, CRI**  
**>80, IP40, white, switchable**

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

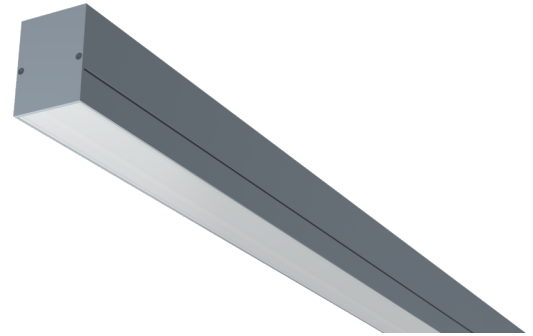

### DANE TECHNICZNE


Electrical data	
Input Voltage AC	AC 220-240V / 50-60Hz
Power Factor	0,9
System power	61 W
Inrush current	29 A
Inrush current duration	143 $\mu$ s
Luminaires on C16A fuse	42 Stk.
DC Ready	Yes
Connection cross section	2,5 mm <sup>2</sup>
Electrical version	with internal operating device, switchable
CASAMBI Ready	Yes
Photometrical data	
Light source	LED
Colour temperature	3 000 K
Rated luminous flux	6 100 lm
Luminous efficacy	100 lm/W
Light colour	830
Colour rendering index (CRI)	> 80
Colour tolerance	3
Beam angle	60 °
UGR	26,2
Lifetime (h, at 25°C)	75 000 h, L80



Acceptance tests	
Certifications	CE
Protection class	I
Ingress protection (IP) rating	IP 40
Ambient temperature	-20 to +30 C°
Physical data	
Mounting method	ceiling mounted
Housing material	Aluminium
Housing colour	silver
Cover material	PMMA
Length (L)	1 975 mm
Width (B)	59 mm
Height (H)	79 mm
Product weight	4,8 kg
Weight incl. Packaging	5,7 kg
Packaging Length (L)	2 010 mm
Packaging Width (B)	123 mm
Packaging Height (H)	101 mm



## LIGHT DISTRIBUTION

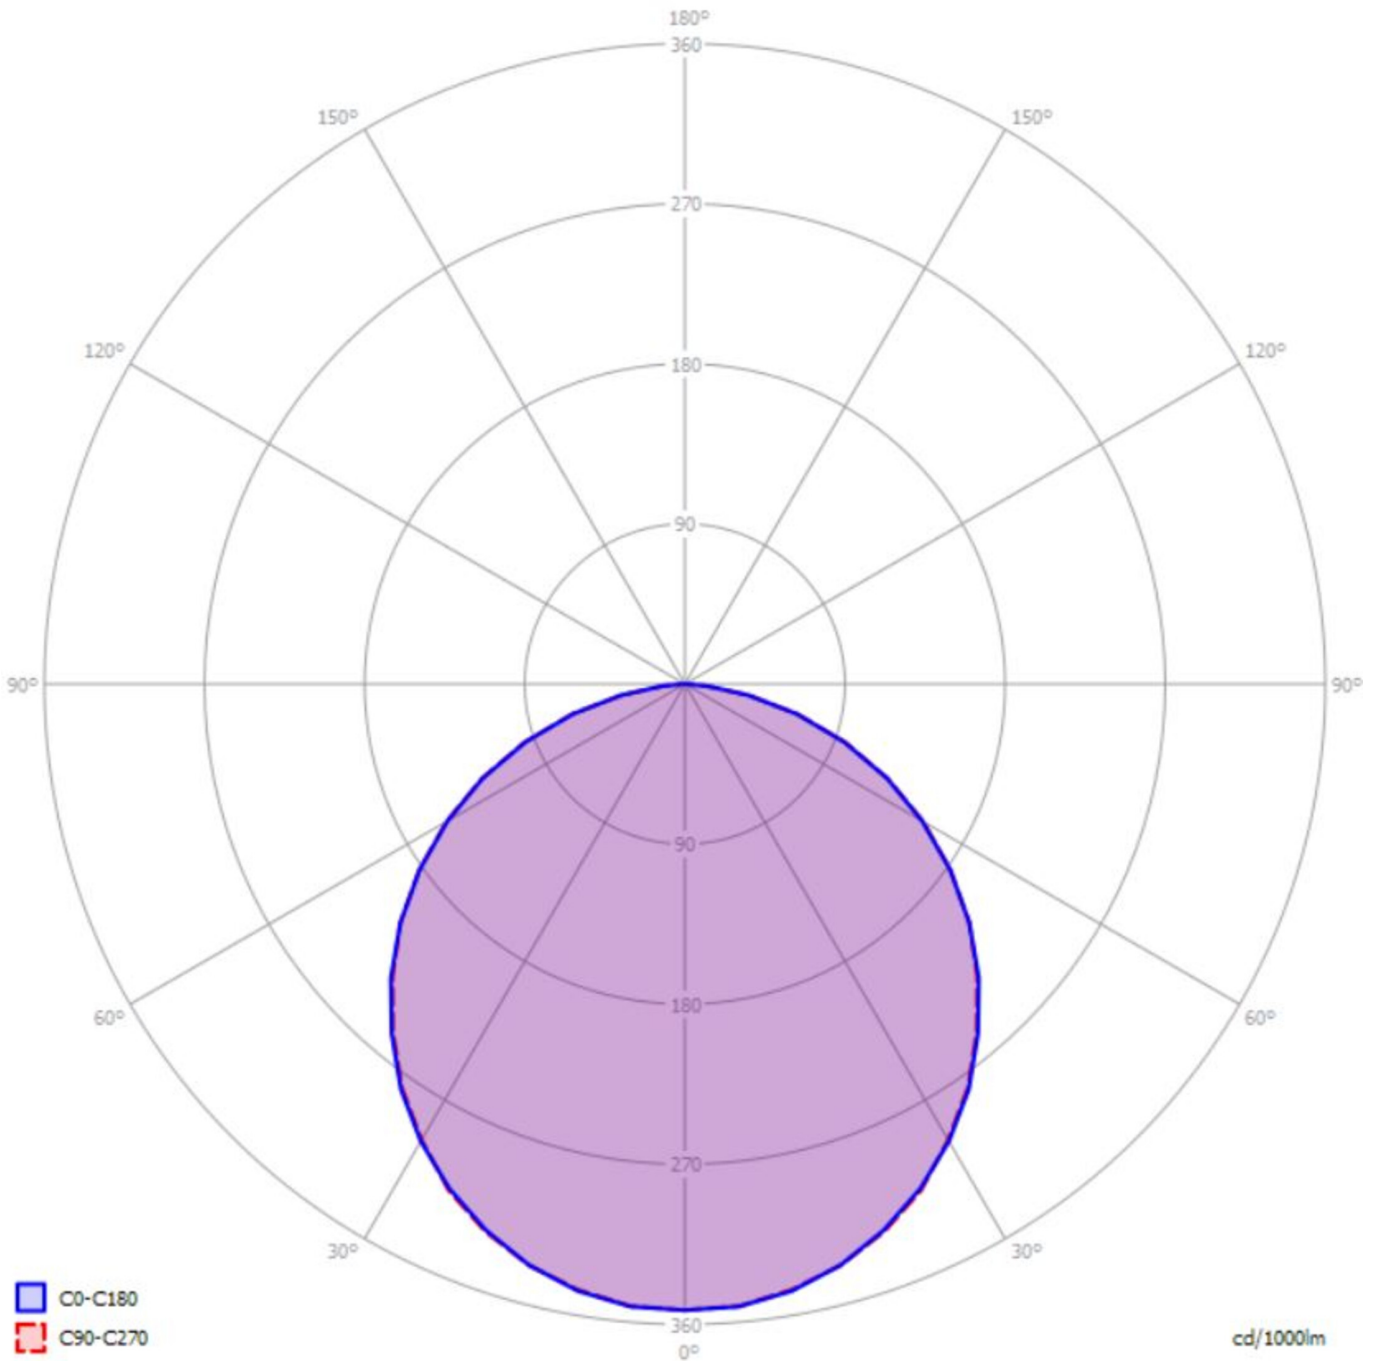

## ACCESSORIES

YWDMA-PENDEL - Pendant set for MAVS incl. transparent cable 3 x 1.5 mm<sup>2</sup>

YWDMA-MONKL-A - Mounting clamp for MAVS, surface mounting / 1 pc.

State: 25.02.2024 - Zastrzega się możliwość zmian technicznych