




**Art.-No.: YWDMA-LEWS-2601-D**  
**LED luminaire "MAVS", ceiling recessed mounting,**  
**rectangular, 865x79x79mm, 26W, 2600lm, 3000K, CRI**  
**>80, IP40, white, switchable**

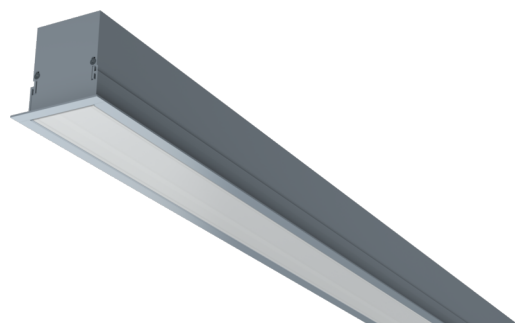

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

### DANE TECHNICZNE


| Electrical data              |  |
|------------------------------|--|
| Input Voltage AC             | AC 220-240V / 50-60Hz                      |
| Power Factor                 | 0,9  |
| System power                 | 26 W                                       |
| Inrush current               | 29 A                                       |
| Inrush current duration      | 143 $\mu$ s                                |
| Luminaires on C16A fuse      | 42 Stk.                                    |
| DC Ready                     | Yes  |
| Connection cross section     | 2,5 mm <sup>2</sup>                        |
| Electrical version           | with internal operating device, switchable |
| CASAMBI Ready                | Yes  |
| Photometrical data           |  |
| Light source                 | LED  |
| Colour temperature           | 3 000 K                                    |
| Rated luminous flux          | 2 600 lm                                   |
| Luminous efficacy            | 100 lm/W                                   |
| Light colour                 | 830  |
| Colour rendering index (CRI) | > 80                                       |
| Colour tolerance             | 3  |
| Beam angle                   | 60 °                                       |
| UGR                          | 26,2                                       |
| Lifetime (h, at 25°C)        | 75 000 h, L80                              |



| Acceptance tests               |                          |
|--------------------------------|--------------------------|
| Certifications                 | CE                       |
| Protection class               | I                        |
| Ingress protection (IP) rating | IP 40                    |
| Ambient temperature            | -20 to +30 C°            |
| Physical data                  |                          |
| Mounting method                | recessed ceiling mounted |
| Housing material               | Aluminium                |
| Housing colour                 | silver                   |
| Cover material                 | PMMA                     |
| Length (L)                     | 865 mm                   |
| Width (B)                      | 79 mm                    |
| Height (H)                     | 79 mm                    |
| Recess height                  | 150 mm                   |
| Product weight                 | 2,3 kg                   |
| Weight incl. Packaging         | 2,6 kg                   |
| Packaging Length (L)           | 1 300 mm                 |
| Packaging Width (B)            | 118 mm                   |
| Packaging Height (H)           | 75 mm                    |



## LIGHT DISTRIBUTION

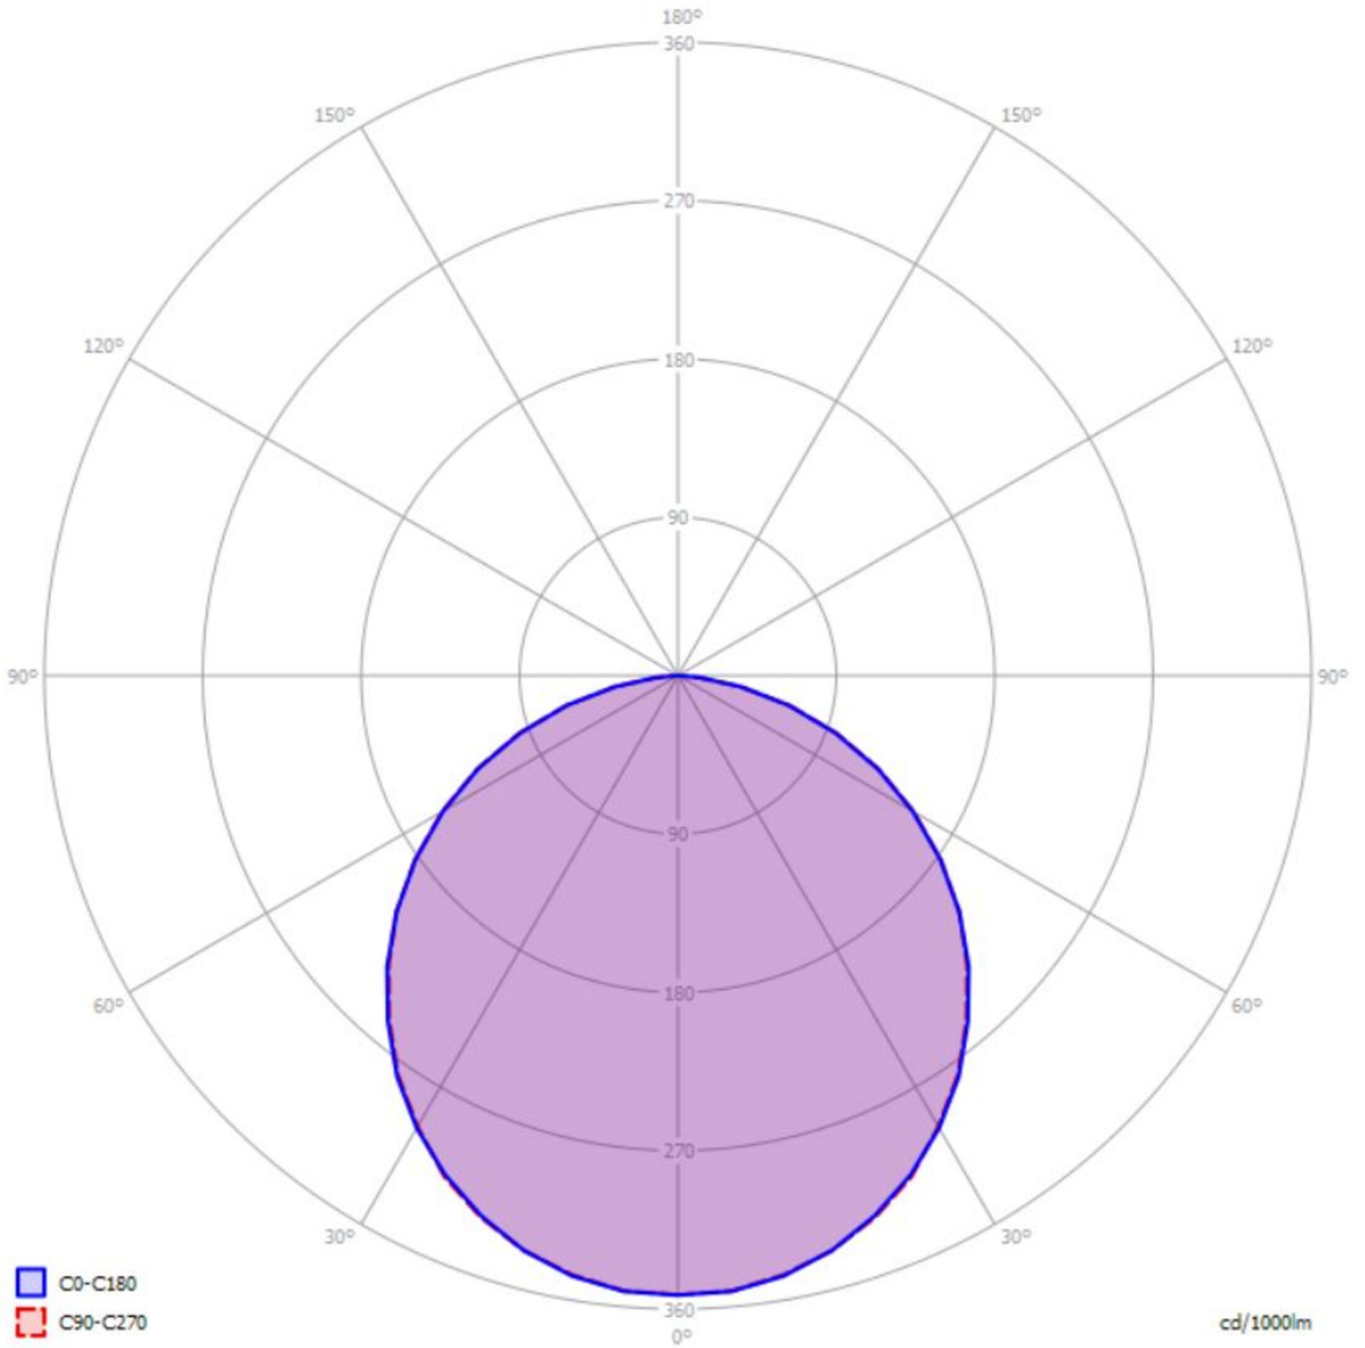

## ACCESSORIES

YWDMA-MONKL-E - Mounting clamp for MAVS, recessed mounting / 1 pc.

State: 25.02.2024 - Zastrzega się możliwość zmian technicznych