



Art.-Nr: YWDRO-RANS-2601-D
LED luminaire "RONDA", wall / ceiling surface mounting,
round, 395x108mm, 26W, 2300lm, 4000K, CRI >80, IP20,
white, switchable

LED ceiling- and wall-mounted luminaire, Ronda series. Housing made from aluminium, silver or white, IP20. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched, installed. Version with Casambi Bluetooth control available.



More information

www.rp-group.com/en/item/YWDRO-RANS-2601-D



TECHNICAL DATA


| Dimensions | |
|---------------------------------|-----------|
| Diameter | 395 mm |
| Product dimensions Width | mm |
| Product dimensions Height | 108 mm |
| Product weight | 1.4 kg |
| Packaging dimensions | |
| Packaging dimensions Length | 440 mm |
| Packaging dimensions Width | 440 mm |
| Packaging dimensions Height | 120 mm |
| Weight incl. packaging | 1.5 kg |
| Housing material | |
| Housing material | Aluminium |
| Certification | |
| Certification | CE, RoHS |
| Insulation class | 2 |
| Protection type (IP) | IP20 |
| Shock resistance level (IK) | 2 |
| Storage temperature range | |
| Storage temperature range (Min) | -25 °C |
| Storage temperature range (Max) | +45 °C |
| Electrical connection | |



| | |
|---|--|
| Connection cross-section | 1.5 mm ² |
| System performance | 26 W |
| Input voltage AC | 220-240V / 50-60Hz V |
| Starting current | 10 A |
| Power factor | 0.9 PF |
| power supply | |
| Number of power supply units on LS B10A | 40 pcs. |
| Number of power supply units on LS B16A | 64 pcs. |
| DC suitability | Yes |
| Electrical design | with internal control gear, Switchable |
| Light data | |
| Light source | LED |
| Rated luminous flux | 2300 lm |
| Colour rendering index | > 80 Ra |
| Beam angle | 120 ° |
| Color temperature | 4000 K |
| Light color | 840 |
| UGR | 25.6 |
| Service life | 50000 h, L80 |
| Temperatures | |
| Ambient temperature (Min) | -20 °C |
| Ambient temperature (Max) | +40 °C |
| Mounting | |
| Mounting | Universal |
| Color | |
| Color | White |



TEXT.LICHTVERTEILUNG


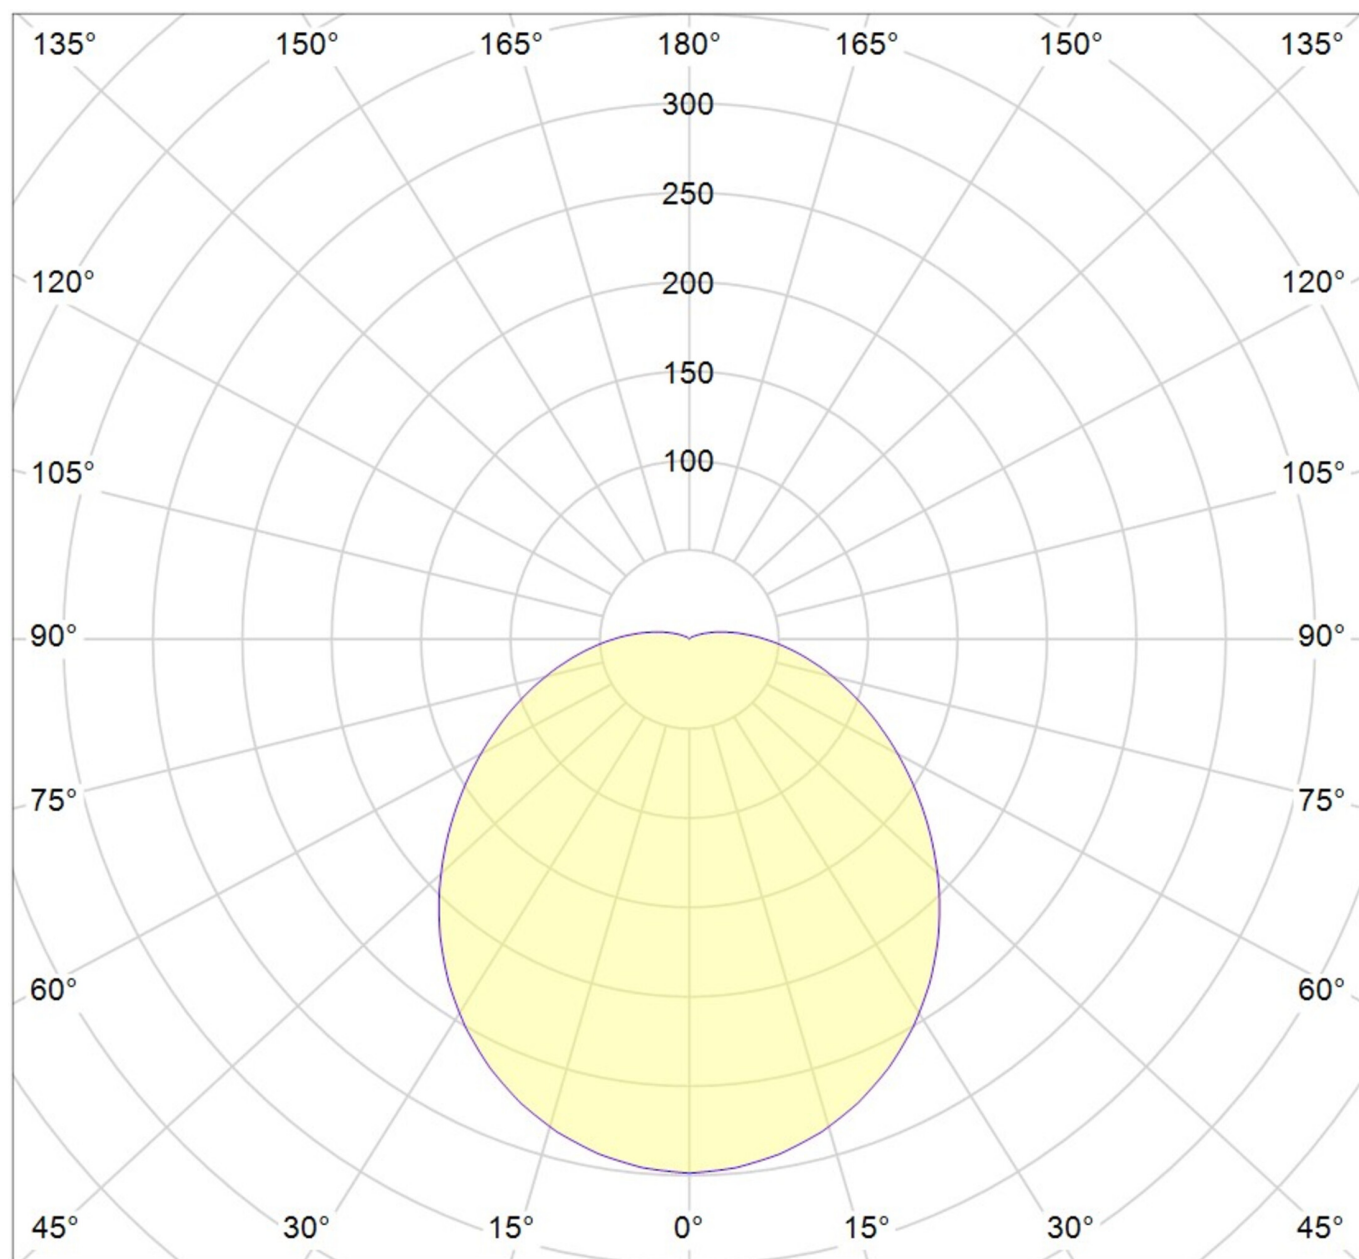


cd/klm

— C0 - C180

— C90 - C270

$\eta = 100\%$

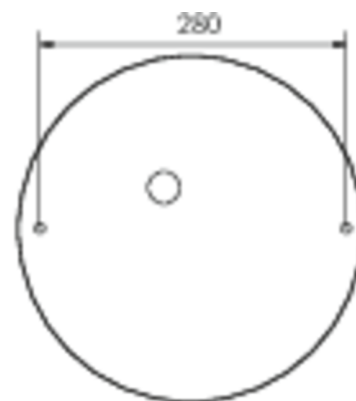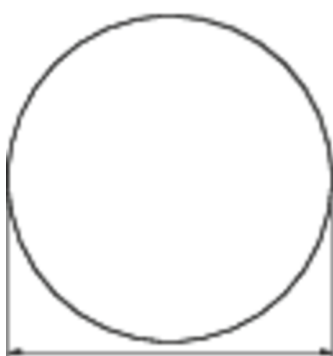

As of: 09.04.2025 - Subject to technical changes and errors.