



**Art.-Nr: YWDRO-RAWS-2601-D**  
**LED luminaire "RONDA", wall / ceiling surface mounting,**  
**round, 395x108mm, 26W, 1900lm, 3000K, CRI >80, IP20,**  
**white, switchable**

LED ceiling- and wall-mounted luminaire, Ronda series. Housing made from aluminium, silver or white, IP20. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched, installed. Version with Casambi Bluetooth control available.



More information

[www.rp-group.com/en/item/YWDRO-RAWS-2601-D](http://www.rp-group.com/en/item/YWDRO-RAWS-2601-D)



## TECHNICAL DATA


Dimensions	
Diameter	395 mm
Product dimensions Width	mm
Product dimensions Height	108 mm
Product weight	1.4 kg
Packaging dimensions	
Packaging dimensions Length	440 mm
Packaging dimensions Width	440 mm
Packaging dimensions Height	120 mm
Weight incl. packaging	1.5 kg
Housing material	
Housing material	Aluminium
Certification	
Certification	CE, RoHS
Insulation class	2
Protection type (IP)	IP20
Shock resistance level (IK)	2
Storage temperature range	
Storage temperature range (Min)	-25 °C
Storage temperature range (Max)	+45 °C
Electrical connection	



Connection cross-section	1.5 mm <sup>2</sup>
System performance	26 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	10 A
Power factor	0.9 PF
<b>power supply</b>	
Number of power supply units on LS B10A	40 pcs.
Number of power supply units on LS B16A	64 pcs.
DC suitability	Yes
Electrical design	with internal control gear, Switchable
<b>Light data</b>	
Light source	LED
Light source power	26 W
Supply Voltage	30-42 V
Constant Current	580 mA
Rated luminous flux	1900 lm
Colour rendering index	80 Ra
Light control	Symmetrical
Product.LightData.Lens	None
Beam angle	120 °
Color temperature	3000 K
Light color	830
UGR	24.5
Service life	50000 h, L80
<b>Temperatures</b>	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+40 °C
<b>Mounting</b>	
Mounting	Universal
<b>Color</b>	
Color	White





TEXT.LICHTVERTEILUNG

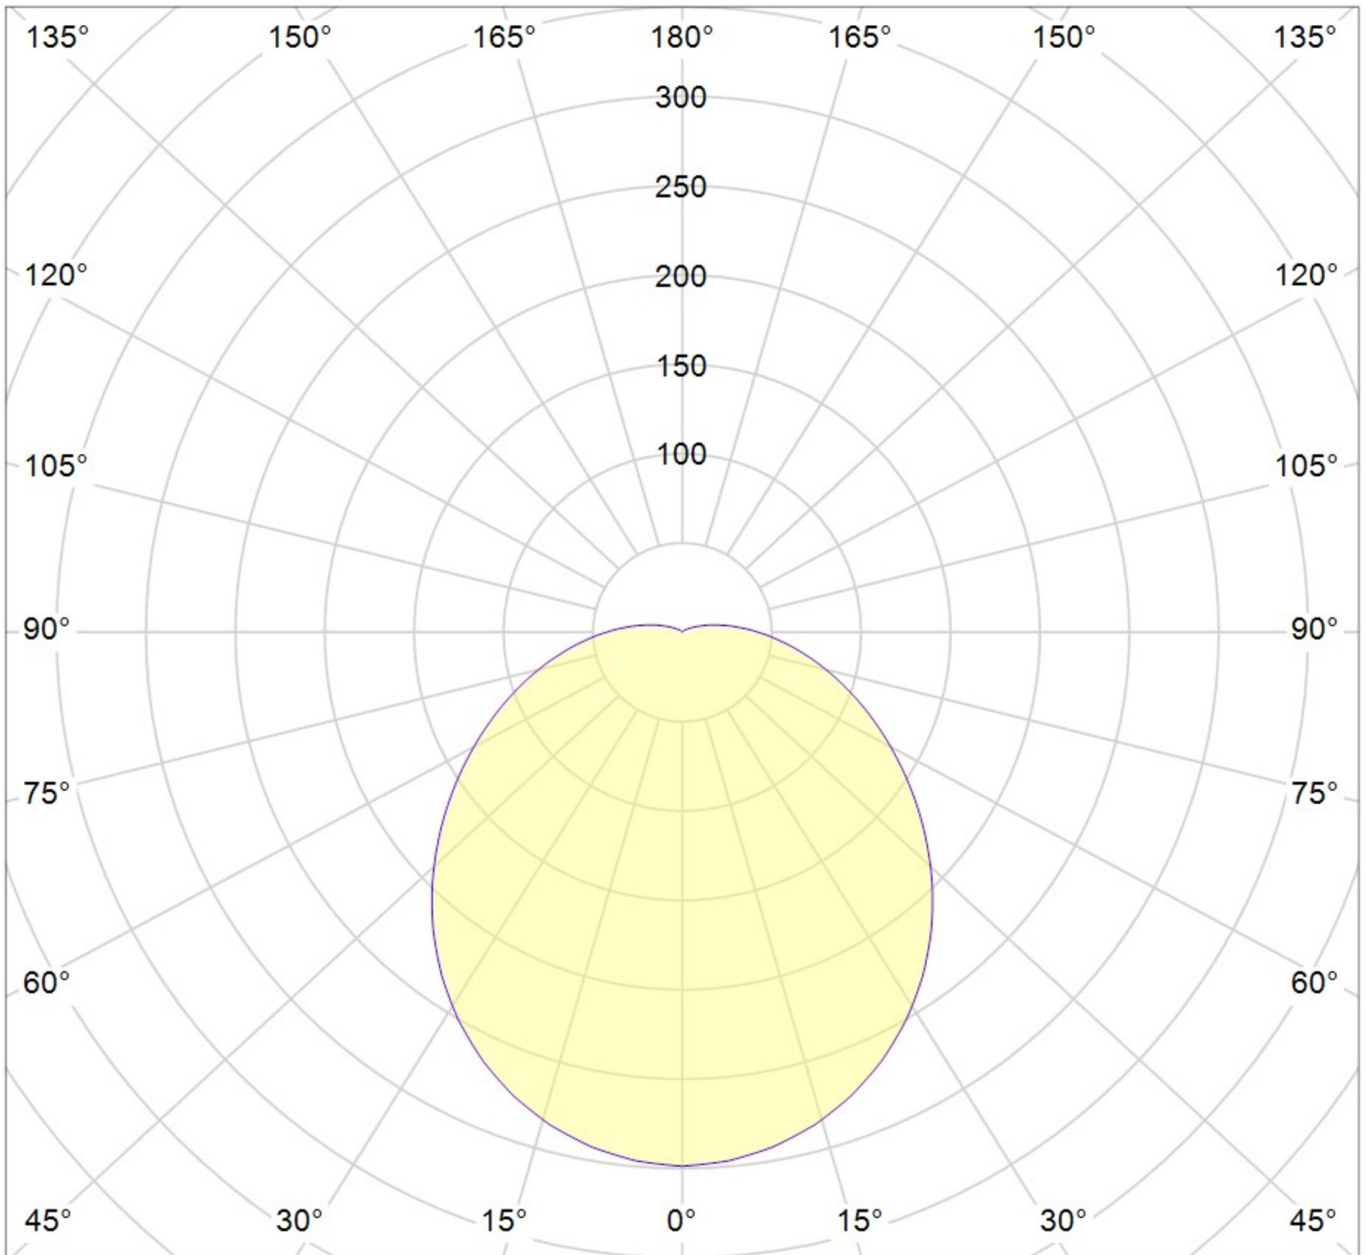

cd/klm

$\eta = 100\%$

— C0 - C180 — C90 - C270

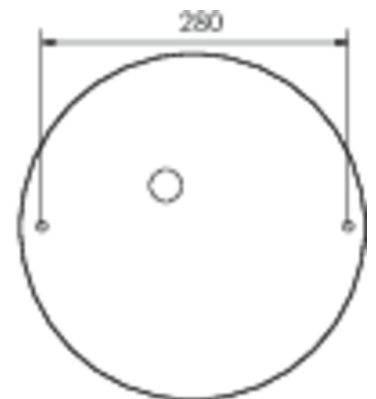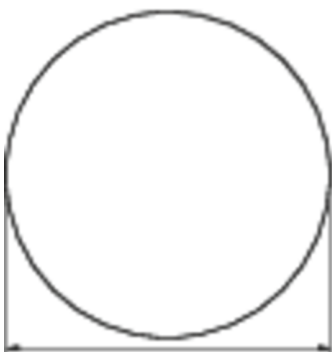

As of: 05.04.2026 - Subject to technical changes and errors.