



Art.-Nr: YWDZO-LAND-2701-DU LED luminaire "ZOLA" ceiling surface mounting, rectangular,

LED ceiling luminaire, ZOLA series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Parabolic louvre diffuser, matt. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 16 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI® Bluetooth control available. DC compatible.





More information www.rp-group.com/en/item/YWDZO-LAND-2701-DU



TECHNICAL DATA

Dimensions		
Product dimensions Length	1415 mm	
Product dimensions Width	125 mm	
Product dimensions Height	50 mm	
Product weight	3.7 kg	
Packaging dimensions		
Packaging dimensions Length	1550 mm	
Packaging dimensions Width	130 mm	
Packaging dimensions Height	60 mm	
Weight incl. packaging	3.9 kg	
Color		
Color	White	
Housing material		
Housing material	Aluminium	
Certification		
Certification	CE	
Insulation class	1	
Protection type (IP)	IP20	
Glow wire test	650 °C	
Electrical connection		
Connection cross-section	1.5 mm ²	





Type of dimming	DALI
System performance	26 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	28 A
Power factor	0.98 PF
power supply	
Number of power supply units on LS B10A	14 pcs.
Number of power supply units on LS B16A	23 pcs.
Number of power supply units at LS C10A	23 pcs.
Number of power supply units at LS C16A	38 pcs.
DC suitability	Yes
Electrical design	with internal control gear, Dimmable
Light data	
Light source	LED
Rated luminous flux	3600 lm
Colour rendering index	> 80 Ra
Colour tolerance	2
Beam angle	72,8/64,8 °
Color temperature	4000 K
Light color	840
UGR	14.4
Service life	50000 h, L80
Light yield	138 lm/w
Temperatures	
Ambient temperature (Min)	0 °C
Ambient temperature (Max)	+25 °C
Mounting	
Mounting	Surface mounting






TEXT.LICHTVERTEILUNG







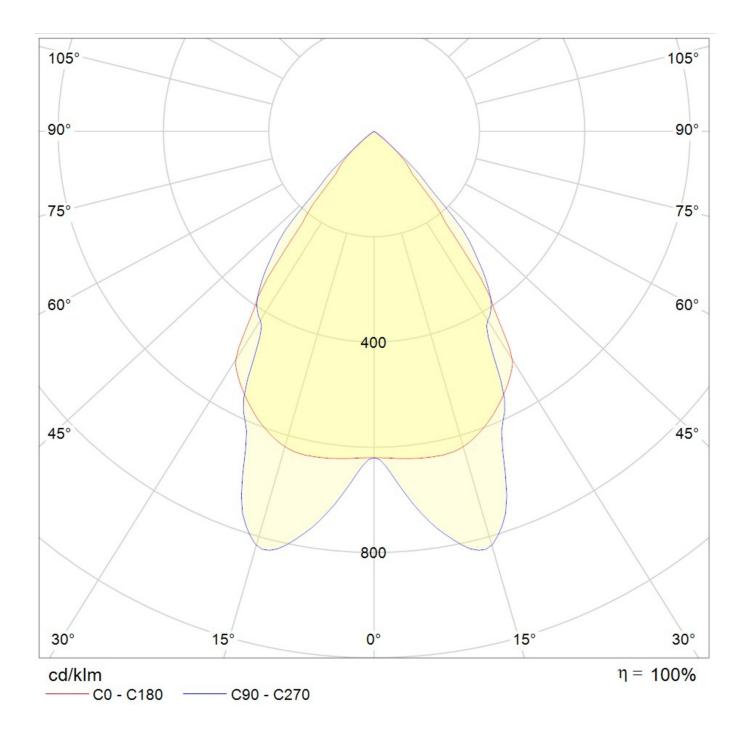







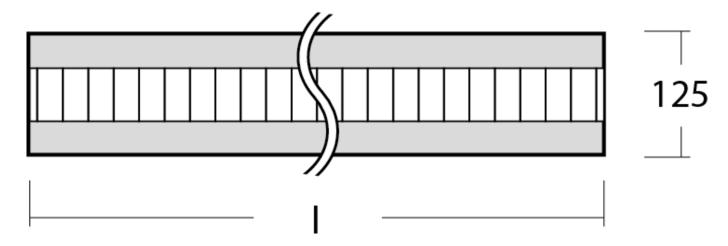

As of: 10.04.2025 - Subject to technical changes and errors.