



**Art.-Nr: YWDZO-LAWS-1901-D**  
**LED lamp "ZORRO", wall / ceiling surface mounting,**  
**600x165x63mm, 19W, 2100lm 3000K, CRI >80, IP40,**  
**switchable**



LED ceiling- and wall-mounted luminaire, ZORRO. Housing made from steel plate, white, powder-coated. Diffuser made from plastic (PC), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible. NANO protection on request.



More information

[www.rp-group.com/en/item/YWDZO-LAWS-1901-D](http://www.rp-group.com/en/item/YWDZO-LAWS-1901-D)



## TECHNICAL DATA


Dimensions	
Product dimensions Length	600 mm
Product dimensions Width	165 mm
Product dimensions Height	63 mm
Product weight	1.4 kg
Packaging dimensions	
Packaging dimensions Length	704 mm
Packaging dimensions Width	166 mm
Packaging dimensions Height	57 mm
Weight incl. packaging	1.7 kg
Color	
Color	white
Housing material	
Housing material	Steel sheet
Certification	
Certification	CE
Insulation class	1
Protection type (IP)	IP40
Electrical connection	
Connection cross-section	2.5 mm <sup>2</sup>




System performance	19 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	20 A
Power factor	0.9 PF
Starting time	200 µs
<b>power supply</b>	
Number of power supply units at LS C16A	60 pcs.
Electrical design	with internal control gear, Switchable
<b>Light data</b>	
Light source	LED
Rated luminous flux	2100 lm
Colour rendering index	> 80 Ra
Colour tolerance	3
Beam angle	90 °
Color temperature	3000 K
Light color	830
UGR	26
Service life	75000 h, L80
Light yield	111 lm/w
<b>Temperatures</b>	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+25 °C
<b>Mounting</b>	
Mounting	Recessed mounting



TEXT.LICHTVERTEILUNG

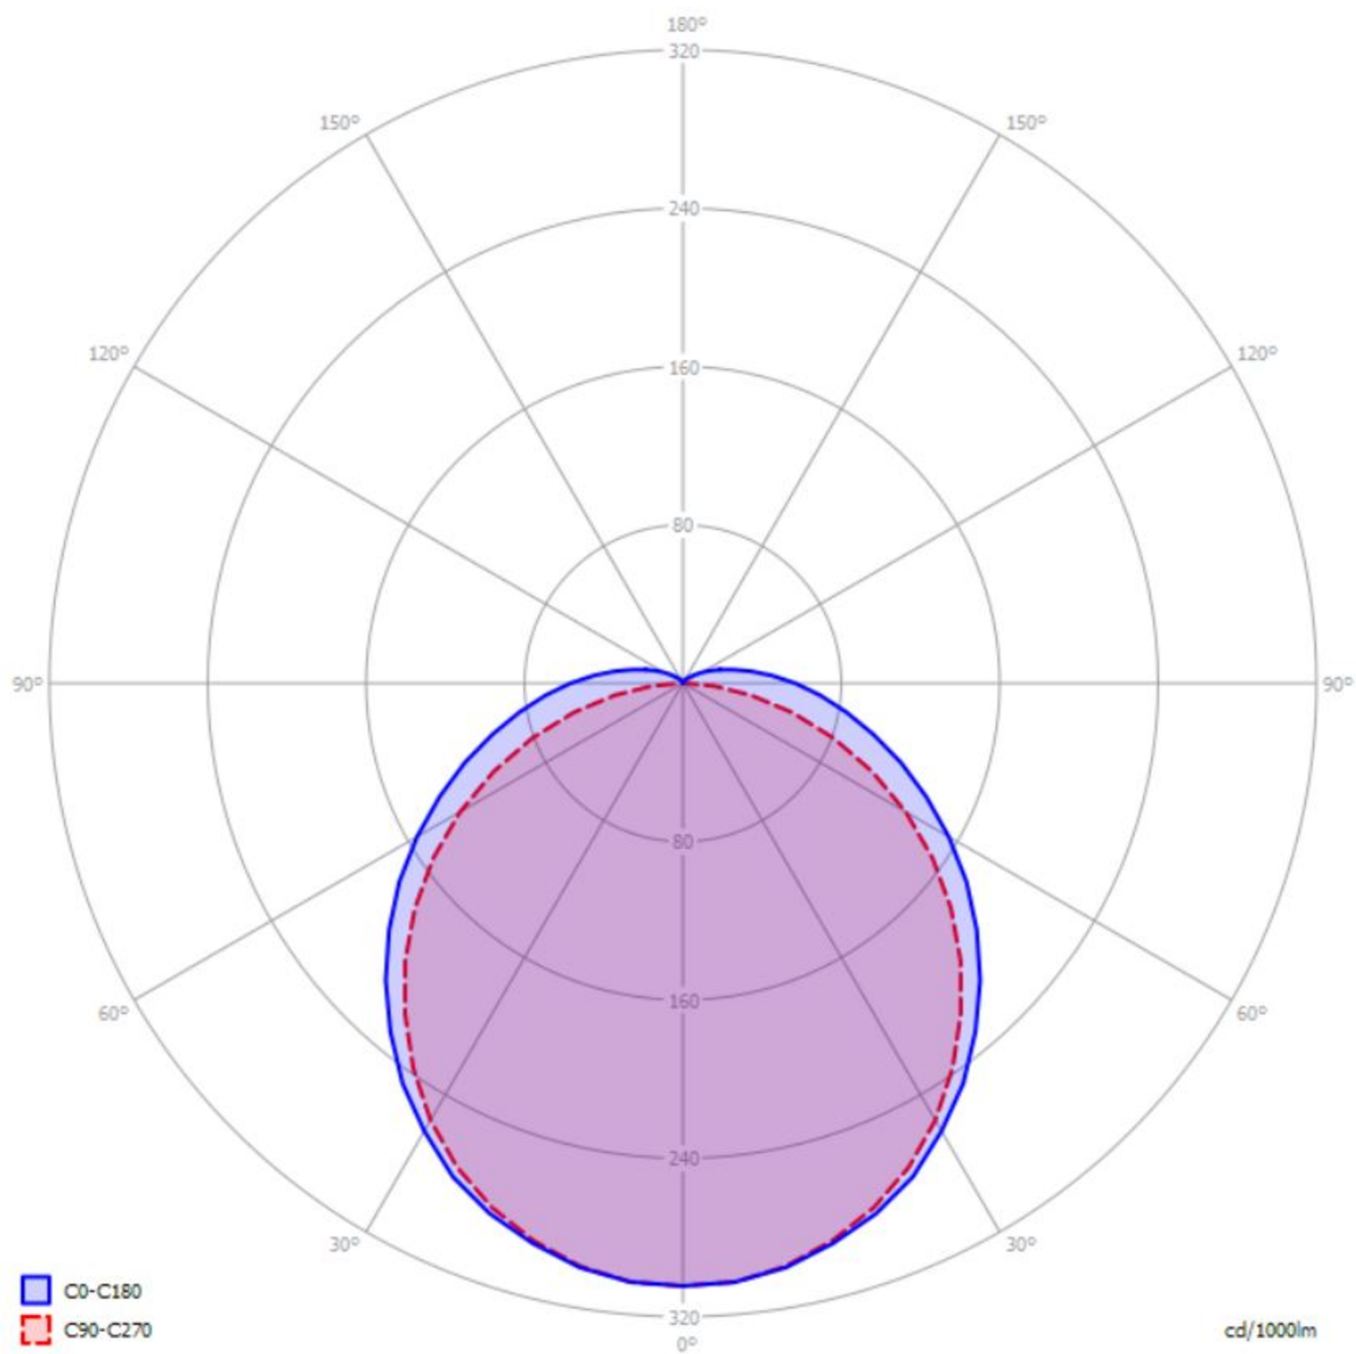

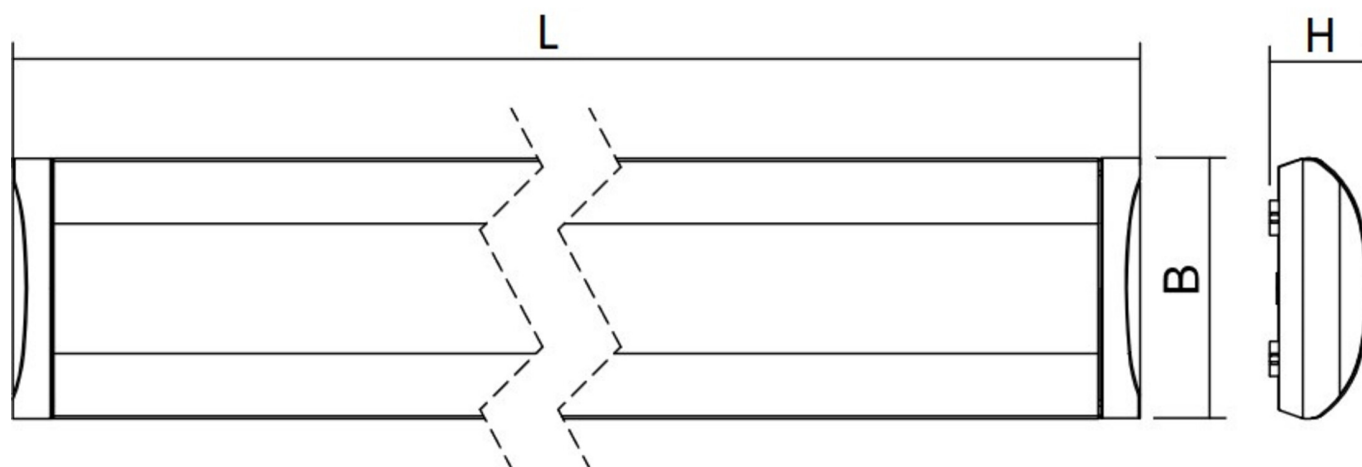

As of: 14.10.2024 - Subject to technical changes and errors.