




**Art.-Nr: YWDZO-PAND-3101-DUI**

**LED pendant luminaire "ZOLA", c- surface mounting, direct / indirect distribution, 1135x50x125mm, 31W, 4150lm, 4000K, CRI >80, IP20, UGR <19, Dali dimmable**

**Lampa wisząca LED „ZOLA”, montaż D, światło bezpośrednie/pośrednie, 1135 x 50 x 125 mm, 31 W, 4150 lm, 4000 K, CRI >80, IP20, UGR <19, ściemnialna Dali**

LED ceiling luminaire, ZOLA series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Parabolic louvre diffuser, matt. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 16 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI Bluetooth control available. DC compatible.

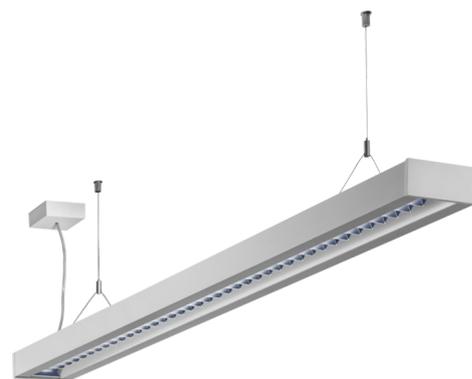

More information

[www.rp-group.com/en/item/YWDZO-PAND-3101-DUI](http://www.rp-group.com/en/item/YWDZO-PAND-3101-DUI)



## TECHNICAL DATA


Dimensions	
Product dimensions Length	1135 mm
Product dimensions Width	50 mm
Product dimensions Height	125 mm
Product weight	3.1 kg
Packaging dimensions	
Packaging dimensions Length	1270 mm
Packaging dimensions Width	130 mm
Packaging dimensions Height	60 mm
Weight incl. packaging	3.3 kg
Color	
Color	White
Housing material	
Housing material	Aluminium
Certification	
Certification	CE
Insulation class	1
Protection type (IP)	IP20





Glow wire test	650 °C
<b>Electrical connection</b>	
Connection cross-section	1.5 mm <sup>2</sup>
Type of dimming	DALI
System performance	31 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	20 A
Power factor	0.95 PF
<b>power supply</b>	
Number of power supply units on LS B10A	15 pcs.
Number of power supply units on LS B16A	24 pcs.
Number of power supply units at LS C10A	24 pcs.
Number of power supply units at LS C16A	40 pcs.
DC suitability	Yes
Electrical design	with internal control gear, Dimmable
<b>Light data</b>	
Light source	LED
Rated luminous flux	4150 lm
Colour rendering index	> 80 Ra
Colour tolerance	2
Beam angle	72,8/64,8 °
Color temperature	4000 K
Light color	840
UGR	14.4
Service life	50000 h, L80
Light yield	134 lm/w
<b>Temperatures</b>	
Ambient temperature (Min)	0 °C
Ambient temperature (Max)	+25 °C
<b>Mounting</b>	
Mounting	Pendulum ceiling construction



TEXT.LICHTVERTEILUNG

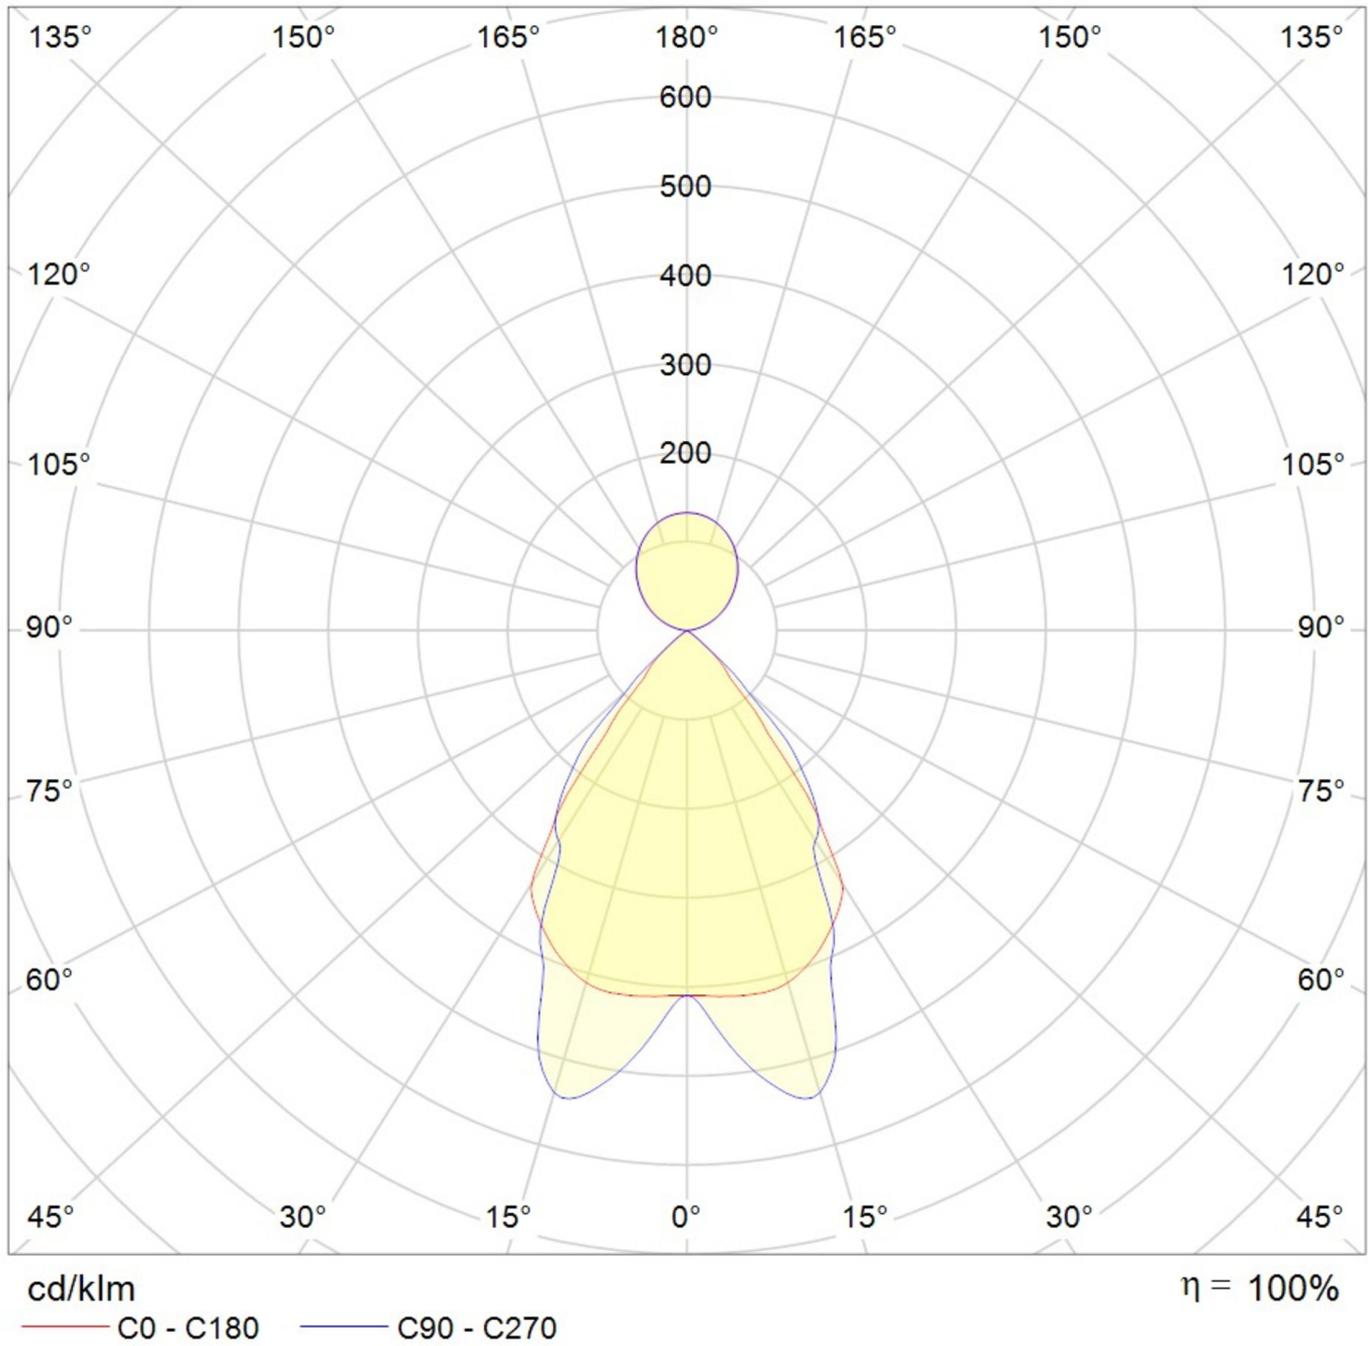

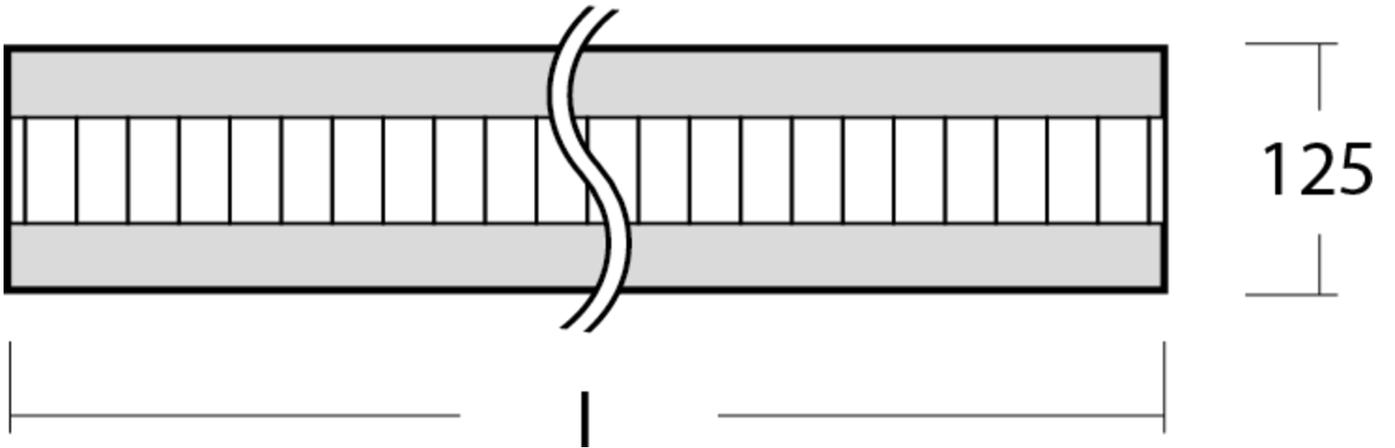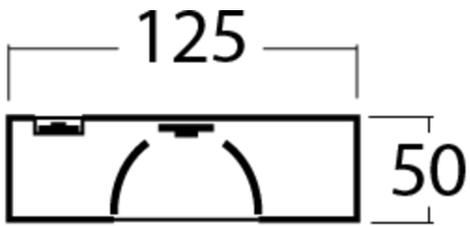

As of: 11.03.2026 - Subject to technical changes and errors.