




Art.-Nr: YWDZO-PAWD-3101-DUI

LED pendant luminaire "ZOLA", c- surface mounting, direct / indirect distribution, 1135x50x125mm, 31W, 3900lm, 3000K, CRI >80, IP20, UGR <19, Dali dimmable

Lampa wisząca LED „ZOLA”, montaż D, światło bezpośrednie/pośrednie, 1135 x 50 x 125 mm, 31 W, 3900 lm, 3000 K, CRI >80, IP20, UGR <19, ściemniająca Dali

LED ceiling luminaire, ZOLA series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Parabolic louvre diffuser, matt. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 16 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI Bluetooth control available. DC compatible.

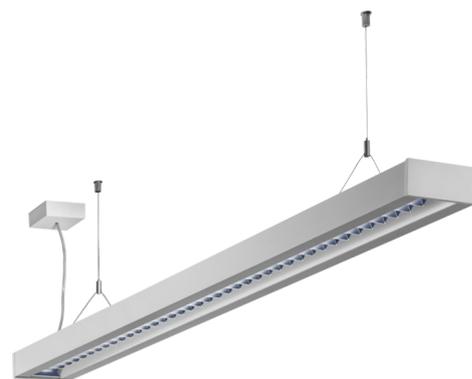

More information

www.rp-group.com/en/item/YWDZO-PAWD-3101-DUI



TECHNICAL DATA


| Dimensions | |
|-----------------------------|-----------|
| Product dimensions Length | 1135 mm |
| Product dimensions Width | 50 mm |
| Product dimensions Height | 125 mm |
| Product weight | 3.1 kg |
| Packaging dimensions | |
| Packaging dimensions Length | 1270 mm |
| Packaging dimensions Width | 130 mm |
| Packaging dimensions Height | 60 mm |
| Weight incl. packaging | 3.3 kg |
| Color | |
| Color | White |
| Housing material | |
| Housing material | Aluminium |
| Certification | |
| Certification | CE |
| Insulation class | 1 |
| Protection type (IP) | IP20 |





| | |
|-----------------------------------------|--------------------------------------|
| Glow wire test | 650 °C |
| Electrical connection | |
| Connection cross-section | 1.5 mm ² |
| Type of dimming | DALI |
| System performance | 31 W |
| Input voltage AC | 220-240V / 50-60Hz V |
| Starting current | 20 A |
| Power factor | 0.95 PF |
| power supply | |
| Number of power supply units on LS B10A | 15 pcs. |
| Number of power supply units on LS B16A | 24 pcs. |
| Number of power supply units at LS C10A | 24 pcs. |
| Number of power supply units at LS C16A | 40 pcs. |
| DC suitability | Yes |
| Electrical design | with internal control gear, Dimmable |
| Light data | |
| Light source | LED |
| Rated luminous flux | 3900 lm |
| Colour rendering index | > 80 Ra |
| Colour tolerance | 2 |
| Beam angle | 72,8/64,8 ° |
| Color temperature | 3000 K |
| Light color | 830 |
| UGR | 14.2 |
| Service life | 50000 h, L80 |
| Light yield | 126 lm/w |
| Temperatures | |
| Ambient temperature (Min) | 0 °C |
| Ambient temperature (Max) | +25 °C |
| Mounting | |
| Mounting | Pendulum ceiling construction |



TEXT.LICHTVERTEILUNG

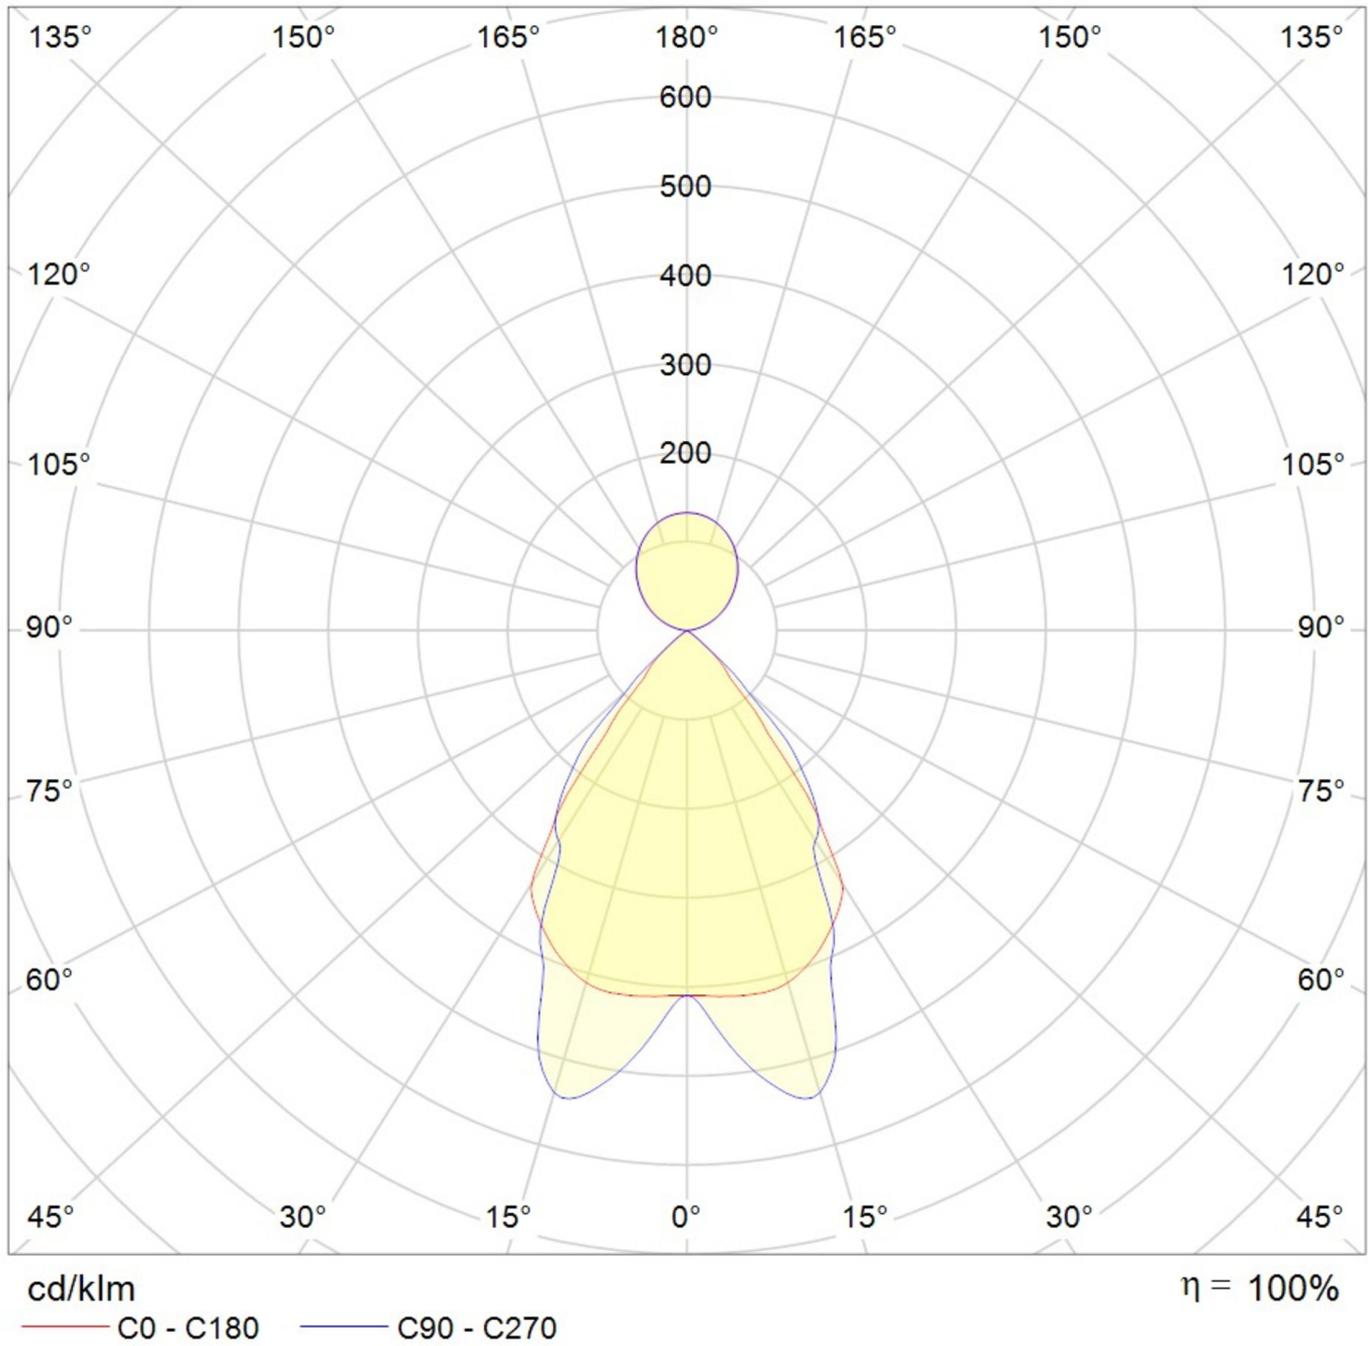

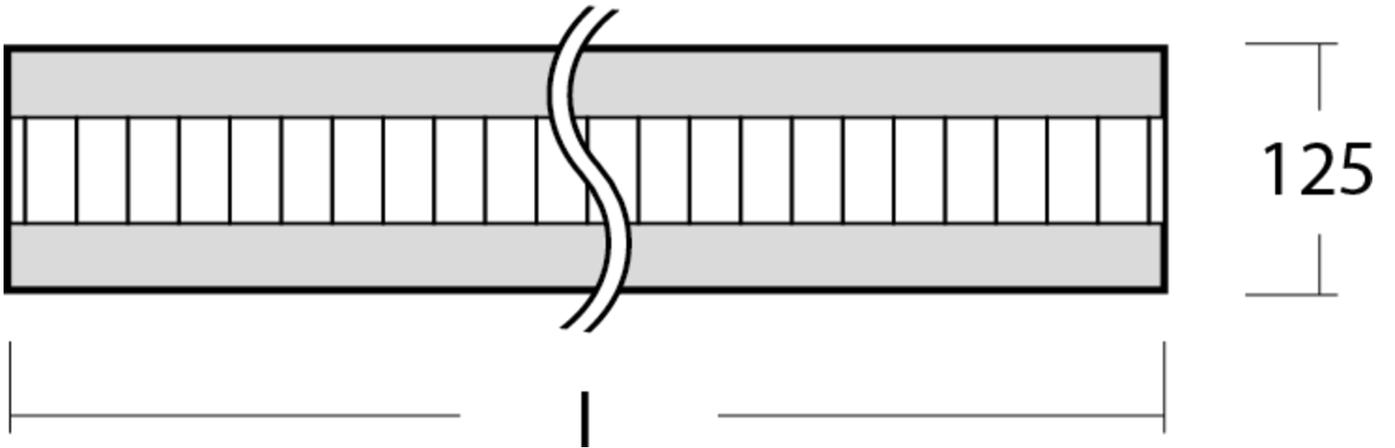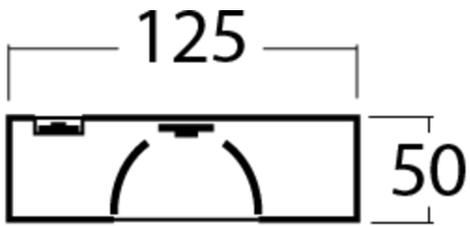

As of: 11.03.2026 - Subject to technical changes and errors.