



Art.-Nr: ZAW019ML-AZ

**Safety luminaire Centralised power supply systems
Wall mounting, Central power supply (ML), CPS, , IP65, Zinc
die-cast, Anthracite**

Robust, zinc die-cast wall surface-mounted luminaire for illuminating escape and emergency routes.

Particularly suited to illuminating escape and emergency routes at the exit and outside the building up to a safe zone. The radiating characteristics distribute the light parallel to the wall.

Control and monitoring via central power supply system.



More information

www.rp-group.com/en/item/ZAW019ML-AZ




TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Wall mounting
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	3,2 W



Power DS	3,2 W
Power BS	1 W
Ambient temperature DS	-30 °C to 35 °C
Ambient temperature BS	-30 °C to 40 °C
Depth	65 mm
Width	315 mm
Height	140 mm
Weight	2.02
Weight incl. packaging	2.14
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056180
EAN	4260659564780

TECHNICAL DRAWING

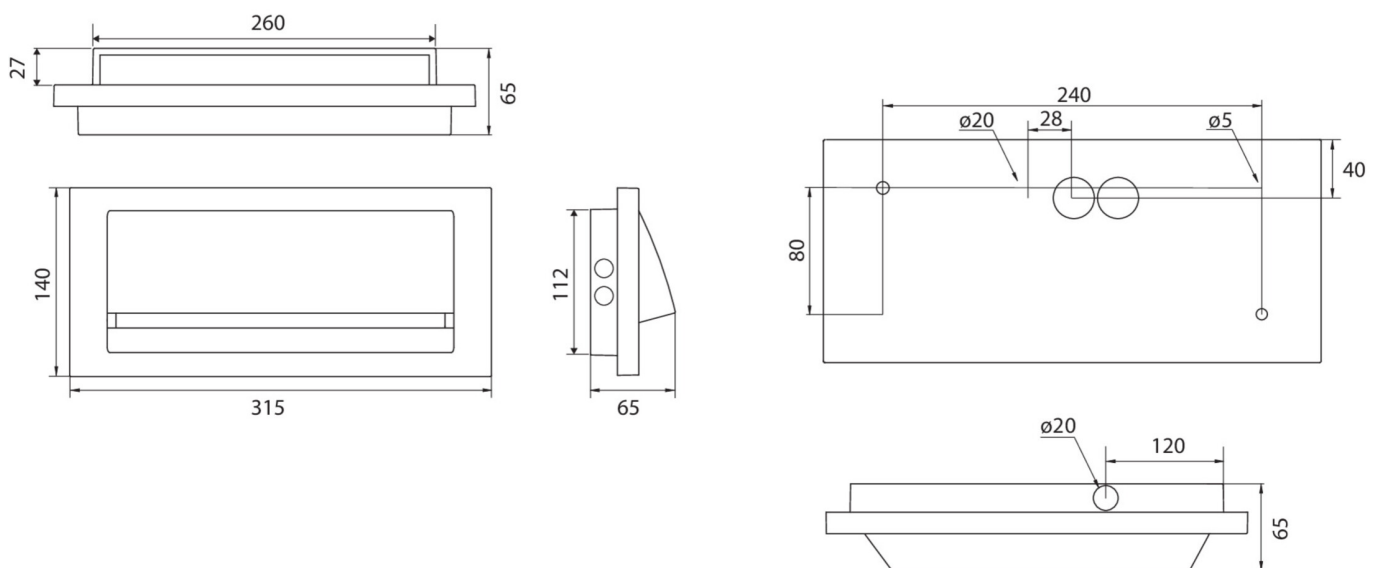

As of: 22.01.2025 - Subject to technical changes and errors.