



Art.-Nr: V2W013SC-ESG
Exit sign Self-contained
Wall mounting, SelfControl (SC), 3 h, 30 m, IP65, Stainless Steel, Stainless steel

High-grade, vandal-proof, stainless steel emergency exit sign luminaire for identifying escape and emergency routes with hinge mechanism that is easy to mount and service.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/V2W013SC-ESG



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Stainless Steel
Housing color	Stainless steel
Protection type (IP)	IP65
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	6,1 W



Power maintained	4,5 W
Power non-maintained	0,35 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	56 mm
Width	386 mm
Height	240 mm
Weight	6.16
Weight incl. packaging	6.64
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	150 lm
Customs tariff number	94056180
GTIN	4260659563820



TECHNICAL DRAWING

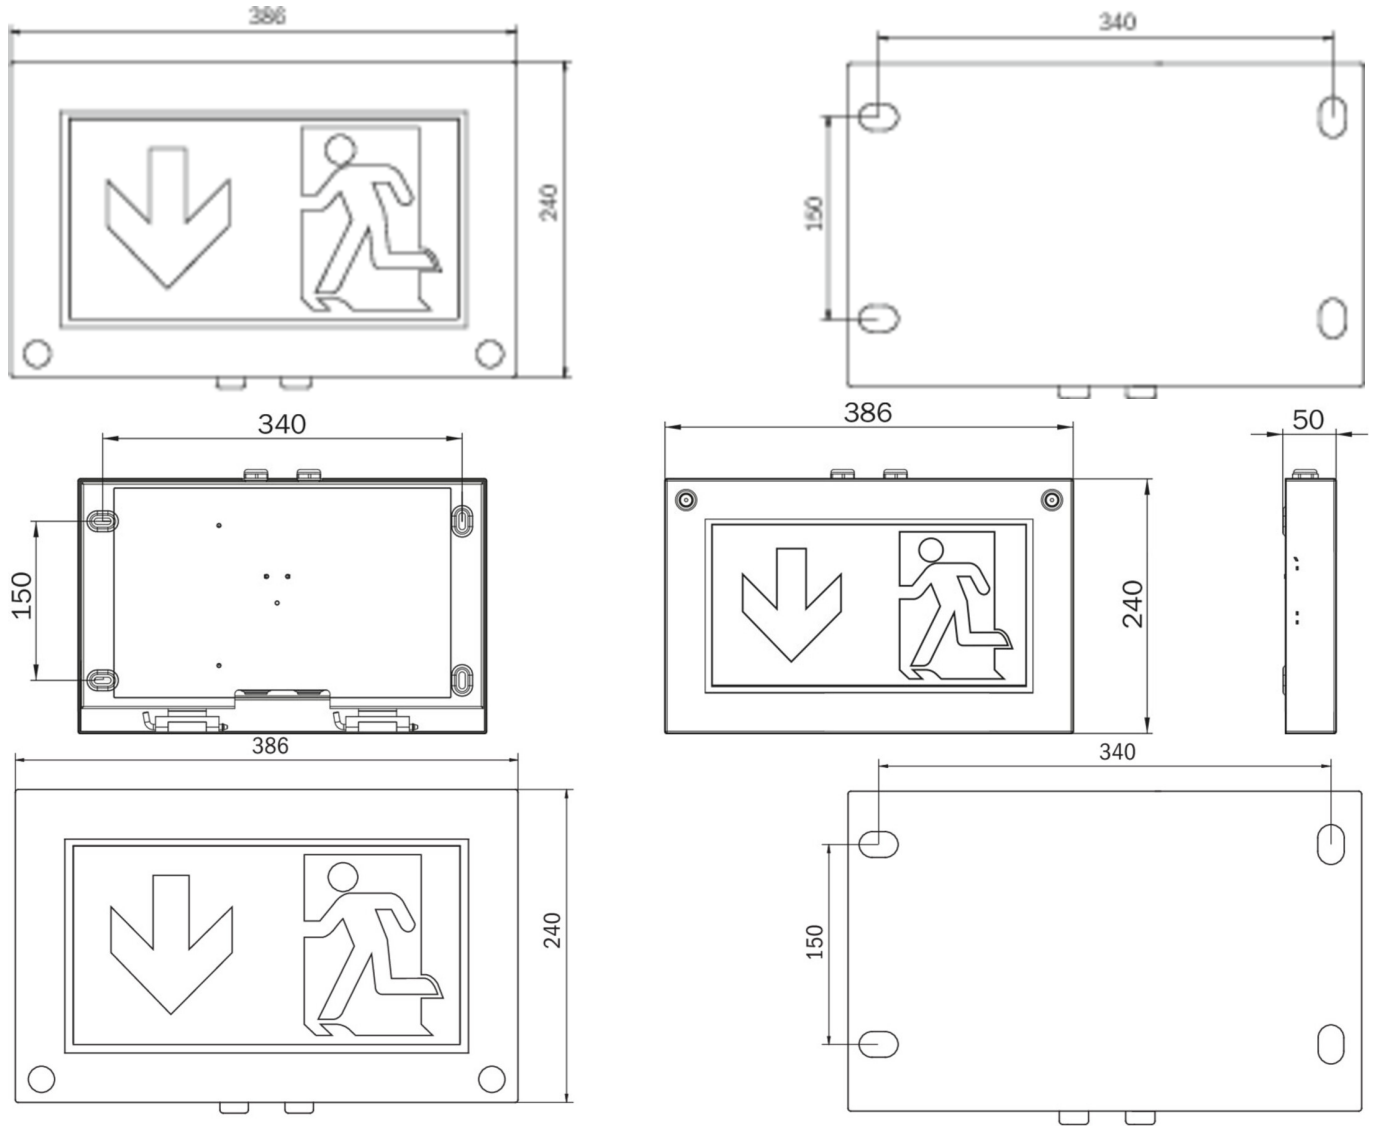

ACCESSORY LIST

BALL2 - Wire mesh guard



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
V2W013SC		SelfControl (SC)	Single battery	Edelstahl	€	no	high	no	unlimited	itself
V2W013SC-V4A		SelfControl (SC)	Single battery	Edelstahl	€	no	high	no	unlimited	itself

As of: 05.09.2025 - Subject to technical changes and errors.