




Art.-No.: YMOCA-PWM-05
Casa PWM5 Bluetooth control module, 5-channel, 12-24V
output, max. combined output 10A, IP20

NEWS!

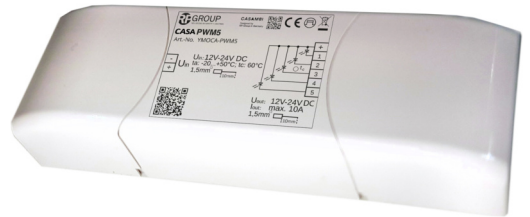

The CASA PWM5 unit enables direct access to the preconfigured functions of the CASAMBI® lighting control. These are on the one hand dimming, switching lights on and off and on the other hand setting colors. By integrating the fifth channel, RGB CCT is now possible. 5 channels, output voltage 12-24V DC. Total output power 10A. Strain relief and terminal cover are integrated.

Connected lights remain flicker-free down to low dimming levels.

TECHNICAL DATA

Electrical data	
Input Voltage DC	12 V
max. Input voltage DC	24 V
Consumption standby	0.4 W
Output max.	120 W
Output voltage DC max.	24 V
Output current max.	10 A
Connection cross section	1.5 mm ²
Communication type	Wireless, Casambi
Dimming	PWM
Electrical version	with external operating device
Frequency band	2,403 - 2,479 GHz
max. transmission power	+4 dBm
CASAMBI Inside	Yes
Acceptance tests	
Certifications	CE
Ingress protection (IP) rating	IP 20
Ambient temperature	-20 to +50 C°
Housing temperatur max., tc	60 C°



Physical data	
Housing material	Polycarbonate
Housing colour	white
Length (L)	143 mm
Width (B)	47 mm
Height (H)	29 mm
Packaging Length (L)	162 mm
Packaging Width (B)	51 mm
Packaging Height (H)	31 mm