




Art.-Nr: WXW011SC
Exit sign Self-contained
Wall mounting, 1 h, 90 m, IP20, Metal, White, printed
pictograms

Square emergency exit sign cube luminaire for wall mounting for illuminating escape and emergency routes.

The cube shape means that this plastic luminaire is easily recognisable from three sides. Ideal for large-scale applications, e.g. in large stores.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).

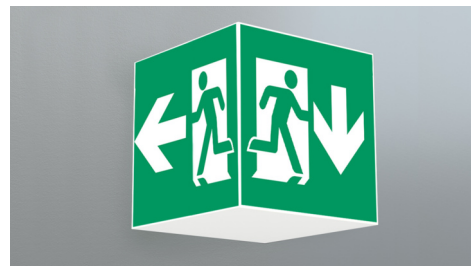

More information
www.rp-group.com/en/item/WXW011SC



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	90 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	6,1 W




Power maintained	4,5 W
Power non-maintained	0,35 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	500 mm
Width	500 mm
Height	500 mm
Weight	6.62
Weight incl. packaging	6.76
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	250 lm
Customs tariff number	94056120
GTIN	4260682143846




TECHNICAL DRAWING

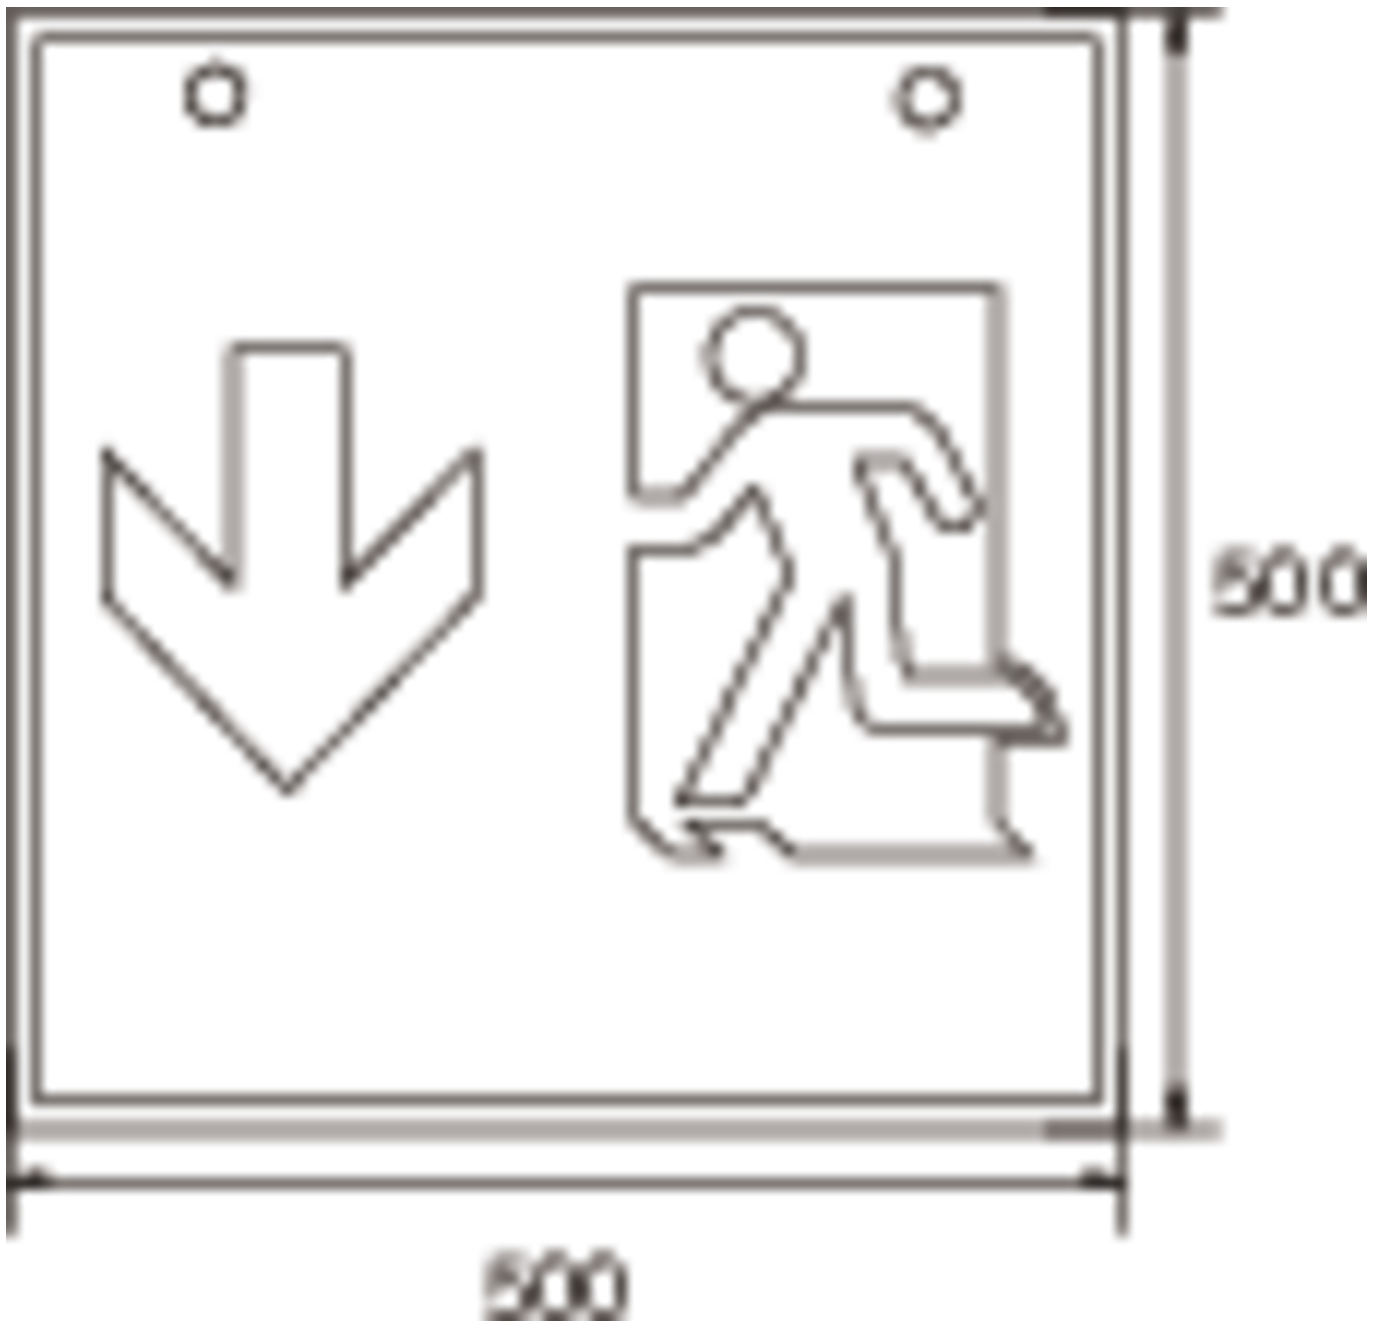


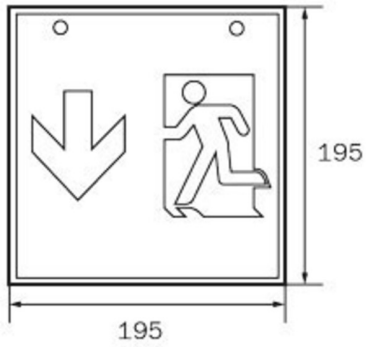


WK

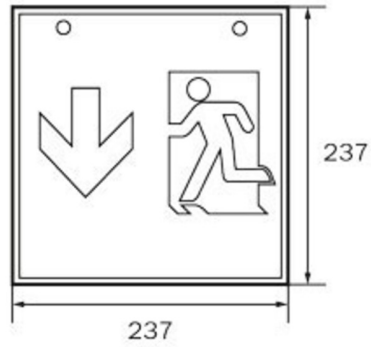

WG

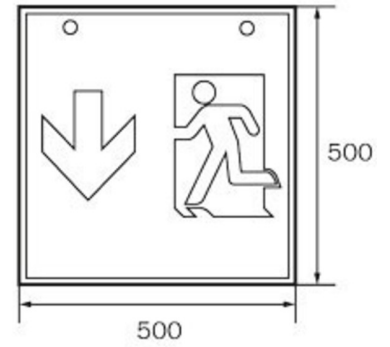

WX

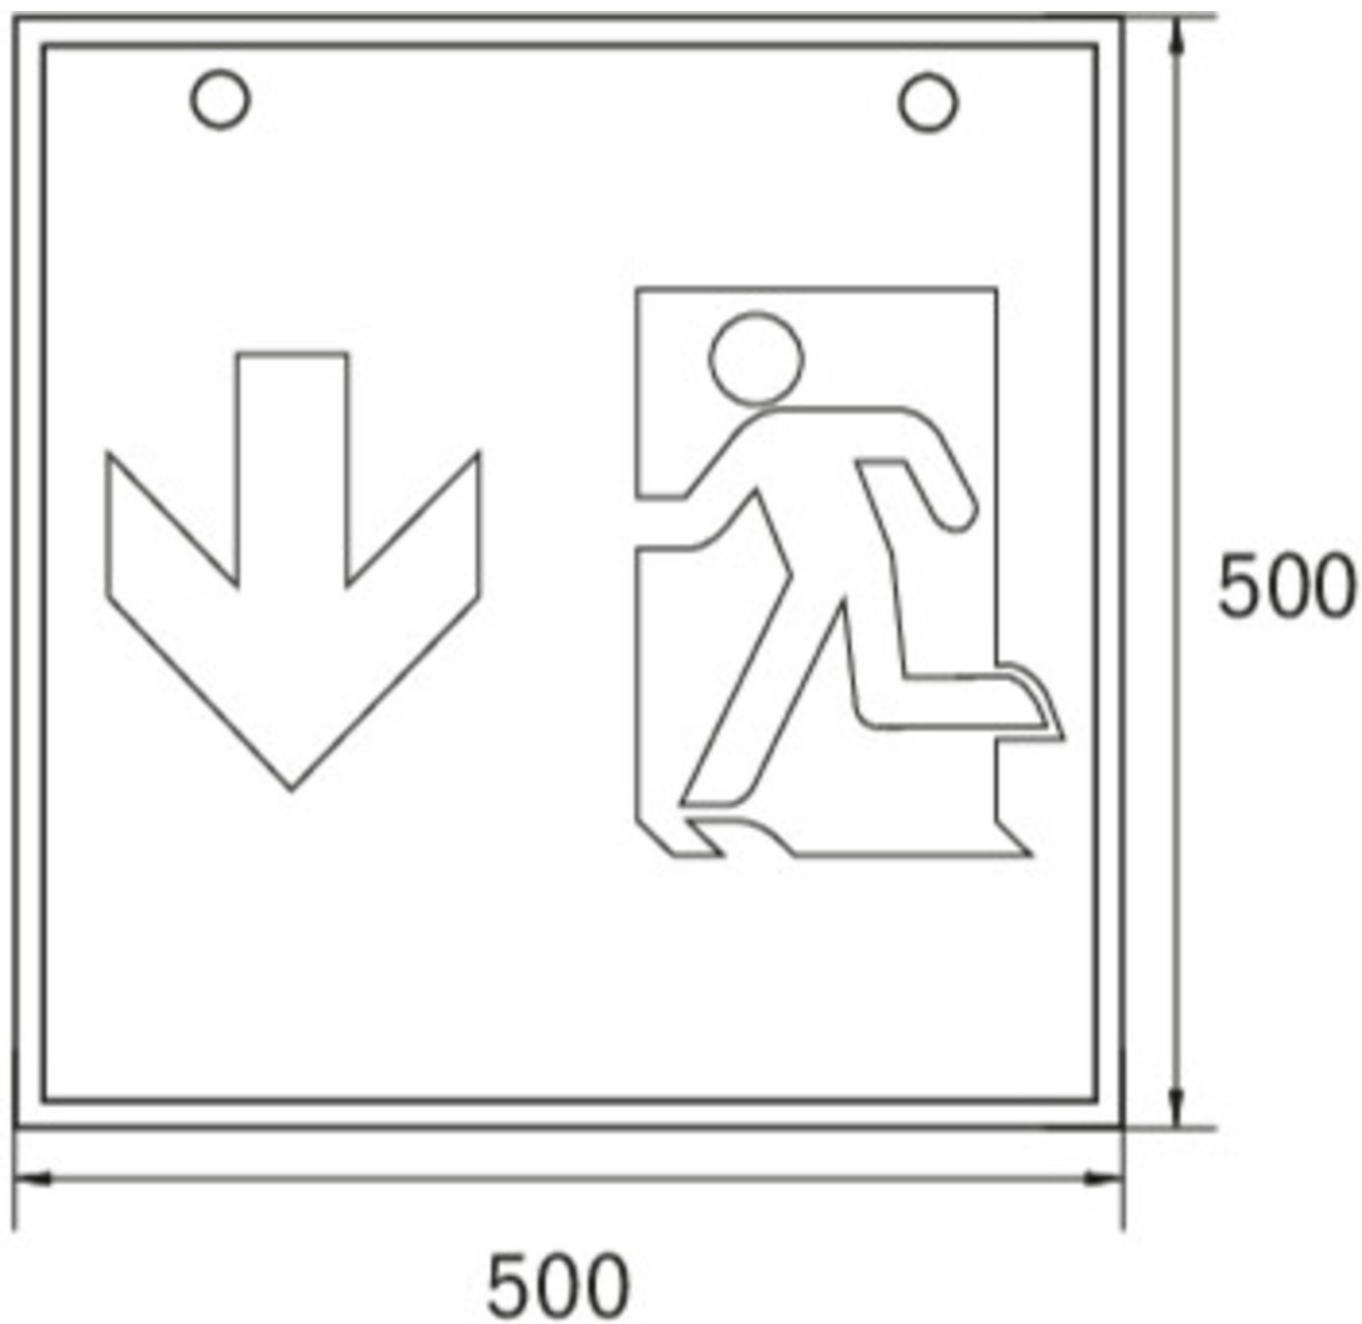

ACCESSORY LIST

WKO - Set of chain eyelets for cube mounting (4 pieces)

NIMHHT4820Q - Battery

As of: 23.07.2026 - Subject to technical changes and errors.