



Art.-Nr: KCW411WL-TT
Exit sign Self-contained
Wall mounting, 1 h, IP54, Polycarbonate, White, Set of
pictograms, low-temperature batteries

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with **Wireless Professional**. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. The designation "**TT**" stands for **low-temperature batteries**. These special **lithium iron phosphate batteries** are designed to function reliably even at low temperatures. They offer stable performance and a long lifespan, even under demanding conditions.



More information

www.rp-group.com/en/item/KCW411WL-TT



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP54
Impact resistance (IK)	6
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	1 h



Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 Hz
Power max.	5,5 W
Power maintained	3,6 W
Power non-maintained	0,7 W
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	60 mm
Width	340 mm
Height	170 mm
Weight	0.78
Weight incl. packaging	0.87
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Customs tariff number	94056120
GTIN	4260766557798



TECHNICAL DRAWING

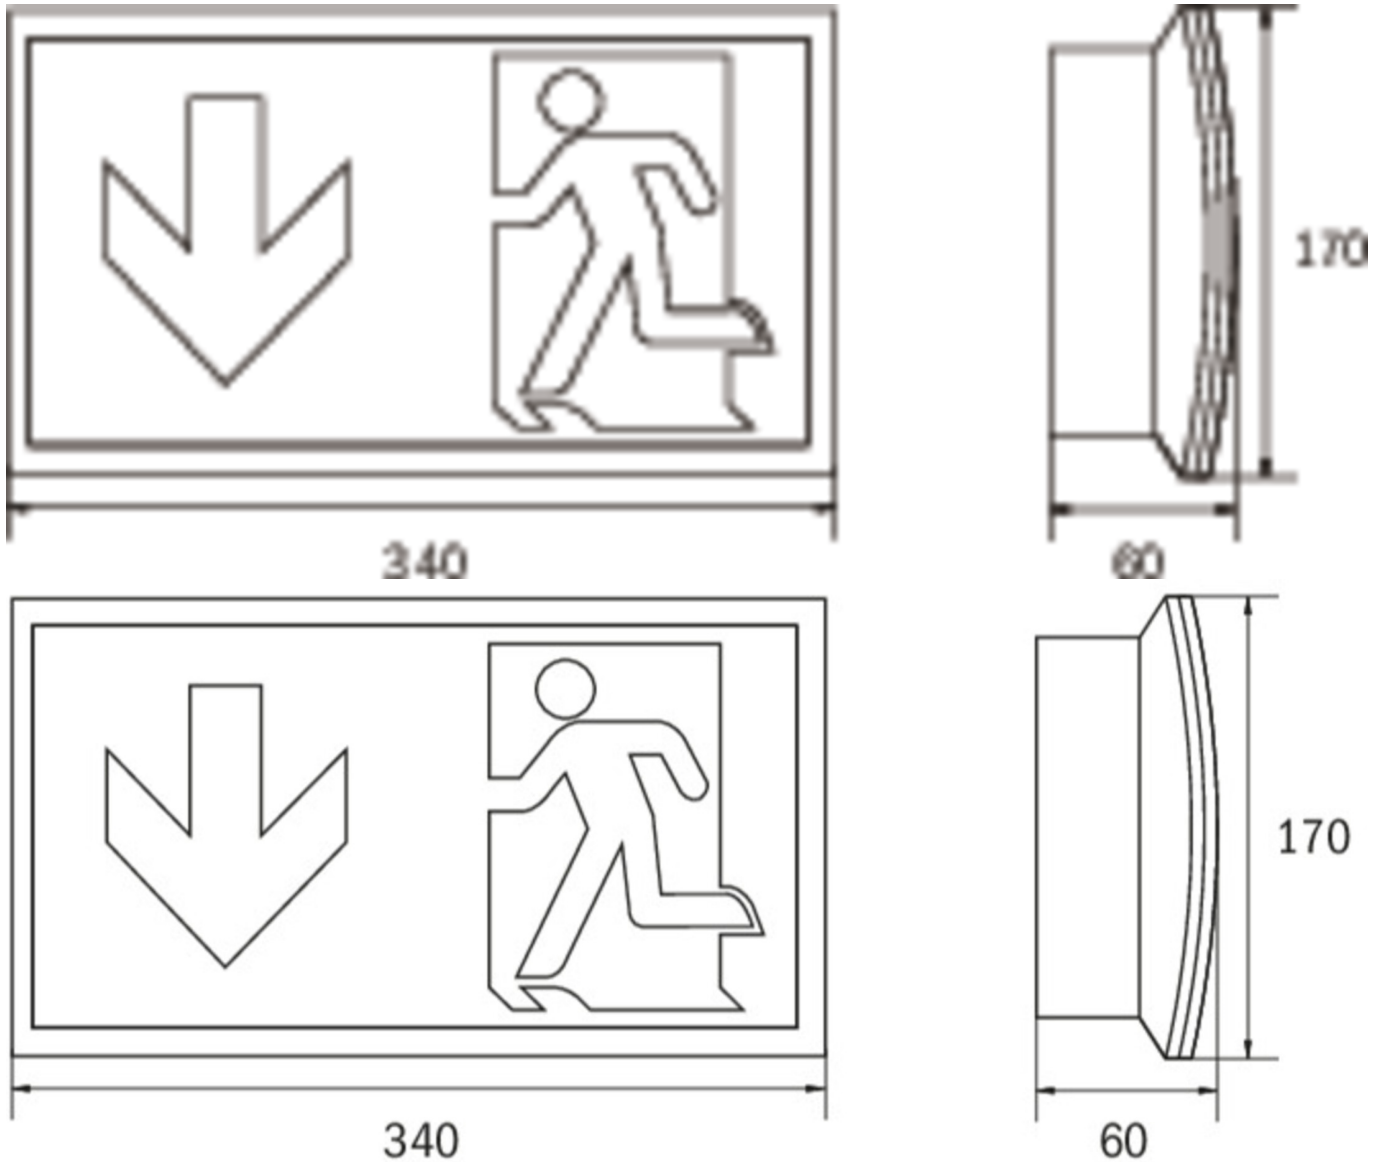

ACCESSORY LIST

BALL2 - Wire mesh guard

DWKCW -

KC-IP65 - Professional electrical engineering module for critical safety applications

KCER - Mounting frame

KCWFH - Wall holder

As of: 15.08.2026 - Subject to technical changes and errors.